


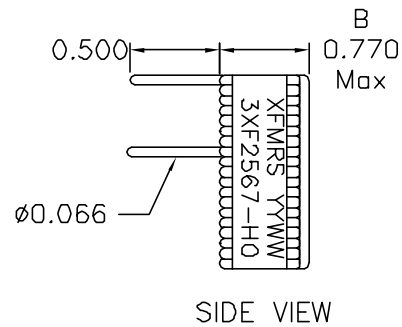


### 1. Mechanical Dimensions:



### 2. Schematic:



### 3. Electrical Specifications:

OCL: 25.6uH±15% @10KHz 0.1V, Each Wdg

OCL: 15uH Typ @10KHz, 0.1V, 20Adc, Wdgs in parallel

Rated Current: 20Adc

DCR: 8 mOhms Max, Each Wdg

Q: tbd Min @10KHz 0.1V

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +105°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

Doc Rev: A/1

**PROPRIETARY** Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

<b>XFMRS Inc.</b> www.XFMRS.com	Title: Inductor		
	UNLESS OTHERWISE SPECIFIED	P/N: 3XF2567-H0	REV. A
TOLERANCES: .xx ±0.01	DWN.	刘 鹏	Jun-13-05
Dimensions in Inch	CHK.	李小锋	Jun-13-05
SHEET 1 OF 1	APP.	BW	Jun-13-05