General Description

SE85XX series is designed for power-sensitive applications. It includes a precision and high voltage input stage, an ultra-low-power bias current branch, and results in a ultra-low-power and low-dropout linear regulator.

The SE85XX operates from an input voltage of V_{OUT}+1V to 35V, consumes only 2.6μA of quiescent current, and offers 2% initial accuracy and low dropout voltage, 300mV typical at 100mA.

SE85XX has 1.8V，2.5V，3.0V，3.3V，3.6V，4.0V，4.2V，5.0V fixed voltage versions.

Other features include short-circuit protection and thermal shutdown.


Features

- Ultra Low Quiescent Current: 2.6μA(Typ.)
- Wide Operating Voltage: V_{OUT}+1V to 35V
- High output current: ≥200mA
- System startup with no overshoot
- Short circuit protection is designed with no overshoot
- Low Dropout Voltage
- High Accuracy Output Voltage: ±2%
- Excellent power / load transient response
- Low temperature coefficient: ±100ppm/℃
- Thermal and Short-Circuit Protection
- SOT-89 and SOT-23 package
- Customer Pin Assignments are available

Applications

- Battery-powered Smoke sensor
- Smoke sensor
- Microcontrollers
- Household appliances and instruments


Application Diagram

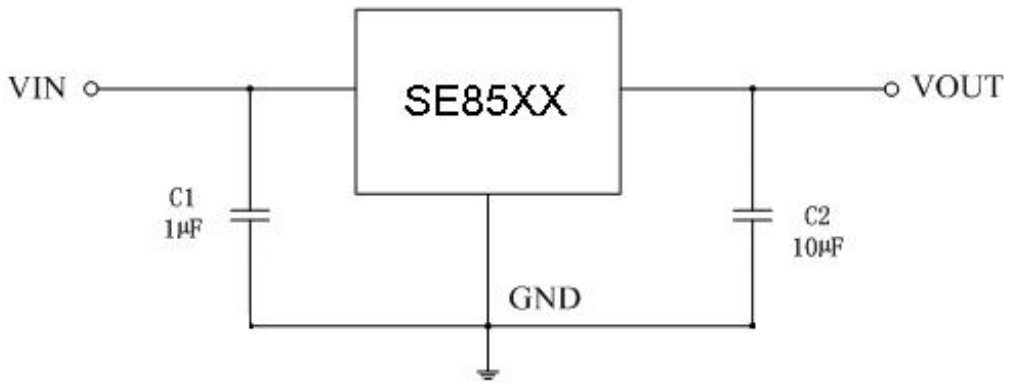

Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2006. • www.seawardinc.com.cn • Page 1

Pin Configuration

(Customer pin assignments are available)

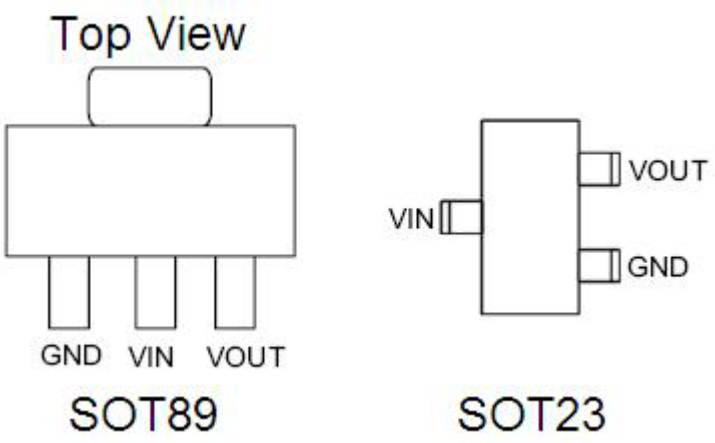

Absolute Maximum Rating

Symbol	Parameter	Value	Units
V_{IN}	Input Supply Voltage	38	V
V_{OUT}	Output Voltage	6	
T_A	Operating Temperature	-40----85	°C
T_{STG}	Storage Temperature	-40---150	
T_J	Maximum Junction Temperature	150	
T_{LEAD}	Lead Temperature (Soldering) 10 seconds	260	
θ_{JA}	Thermal Resistance, Junction-to-Ambient	165(SOT89)	℃/W
		230(SOT23)	
P_D	Power Consumption	750 (SOT89)	mW
		250 (SOT23)	

Ordering Information


Part No.	Package	
SE85XX-LF	SOT89	YYWW means production batch. LF means Lead Free. XX denotes voltage options.
SE85XX-LF	SOT23	A dot on top right corner is for lead-free process. XX denotes voltage options.

Operating Rating

Parameter	Value	Units
Operating Temperature	-20℃～85	℃
Storage Temperature	-40℃～125	℃
Lead Temperature (Soldering) 10 seconds	260±5	℃

Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2006. • www.seawardinc.com.cn • Page 2

Block Diagram

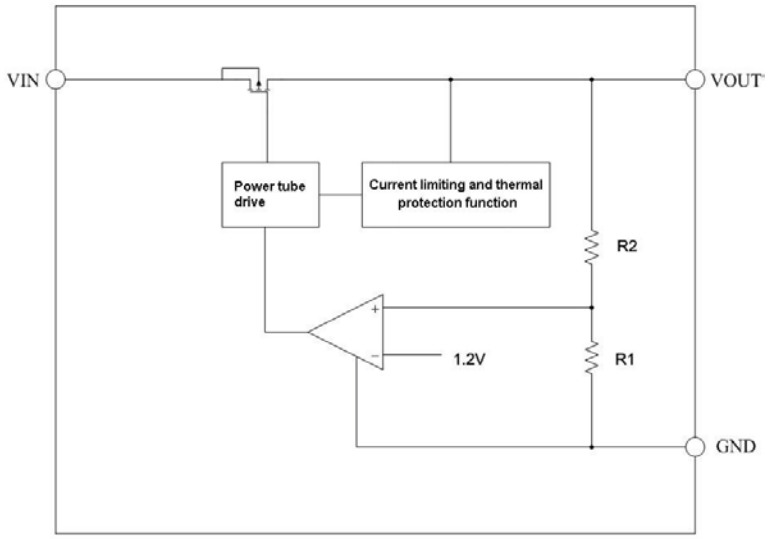


Electrical Characteristics

（V_{IN}=V_{OUT}+ 1V ； Tj=25℃ unless otherwise noted.）


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Supply Voltage		3		36	V
V_{OUT}	Output Voltage Accuracy	I_{OUT}=10mA	-2%		2%	V
I_Q	Quiescent Current			2.6	6.0	μA
I_{OUT}	Output Current		200	250		mA
V_{DROP}	Dropout Voltage	I_{OUT}=10mA ΔV_{OUT}= - V_{OUT} *2%		30		mV
		I_{OUT}=100mA ΔV_{OUT}= - V_{OUT} *2%		300		mV
		I_{OUT}=200mA ΔV_{OUT}= - V_{OUT} *2%		600		mV
V_{LR}	Load Regulation	1mA ≤ I_{OUT}≤ 100mA		40		mV
V_{SR}	Line Regulation	I_{OUT}=1mA, V_{IN}=(V_{OUT} +1V) to 30V		0.2		%/V
I_{LIMIT}	Current Limit	V_{IN}=(V_{OUT} +1V) to 30V R_{LOAD}=V_{OUT} /1A		450		mA
T_{SHDN}	Thermal Protection			125		℃
TC_{VOUT}	Output Voltage Temperature Coefficient	I_{OUT}=10mA -40℃≤T_{AMB}≤100℃		±100		ppm/℃

Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2006. • www.seawardinc.com.cn • Page 3


Typical Performance Characteristics

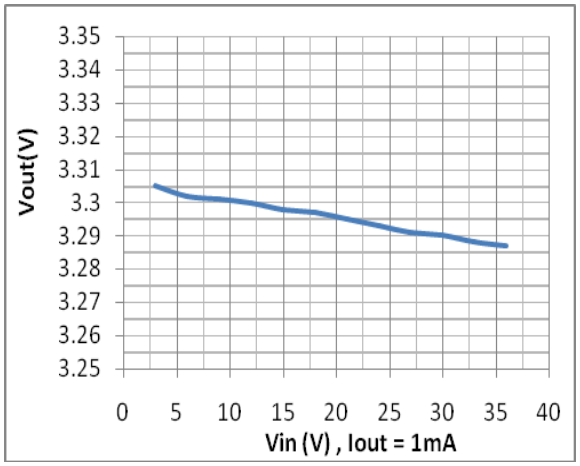


V_{OUT}：3.3V

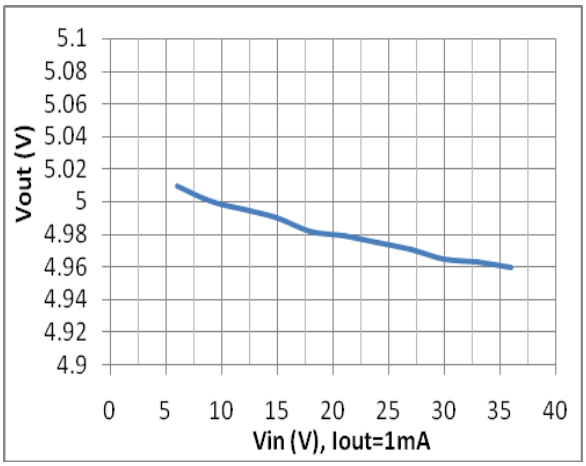


V_{OUT}：5.0V

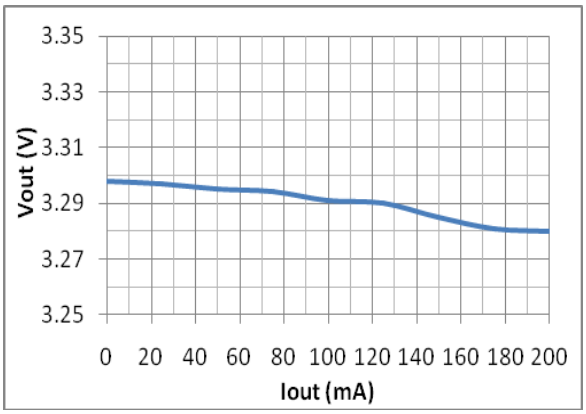


V_{OUT}：3.3V

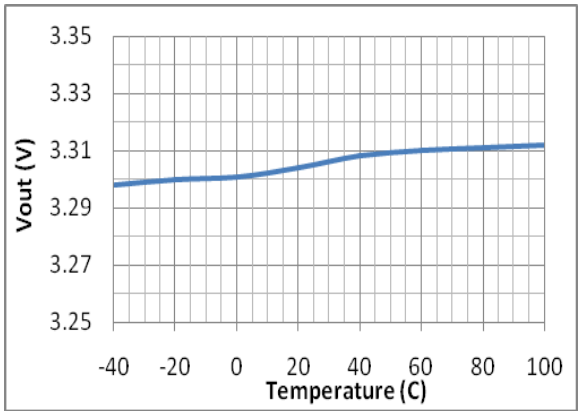

V_{OUT}：3.3V

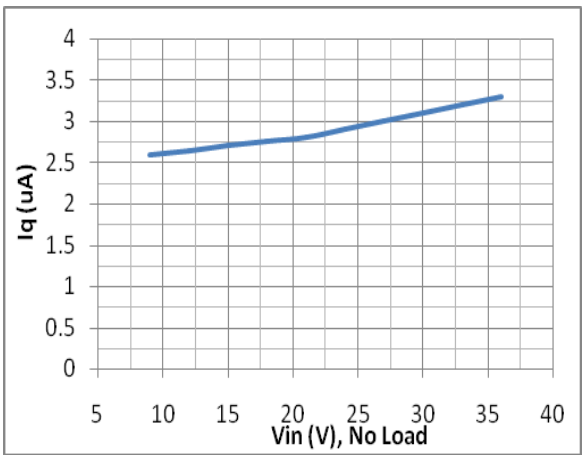


V_{OUT}：3.3V

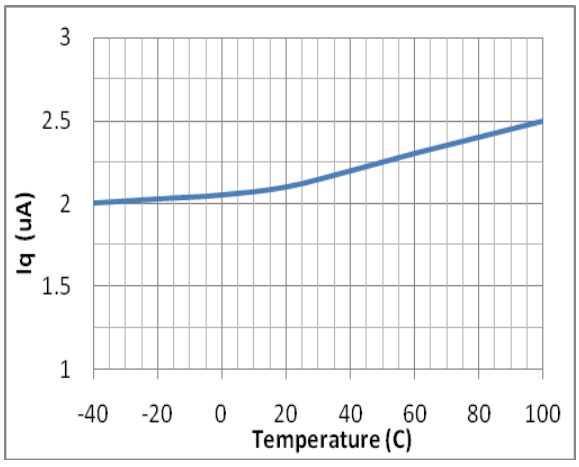

V_{OUT}：5.0V


Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2006. • www.seawardinc.com.cn • Page 4

OUTLINE DRAWING SOT-23

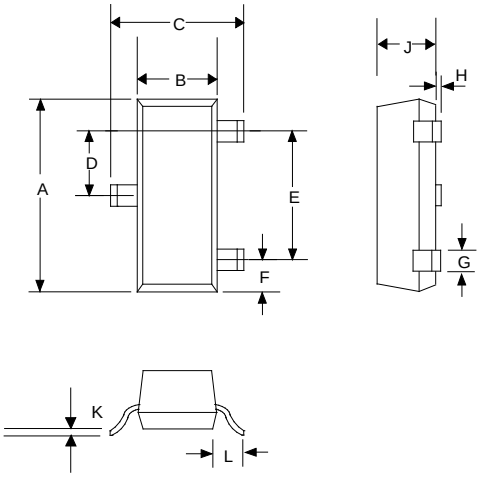

DIMENSIONS				
DIM[N]	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.110	0.120	2.80	3.04
B	0.047	0.055	1.20	1.40
C	0.083	0.104	2.10	2.64
D	0.035	0.040	0.89	1.03
E	0.070	0.080	1.78	2.05
F	0.018	0.024	0.45	0.60
G	0.015	0.020	0.37	0.51
H	0.0005	0.004	0.013	0.10
J	0.034	0.040	0.887	1.02
K	0.003	0.007	0.085	0.18
L	-	0.027	-	0.69

Outline Drawing for SOT-89

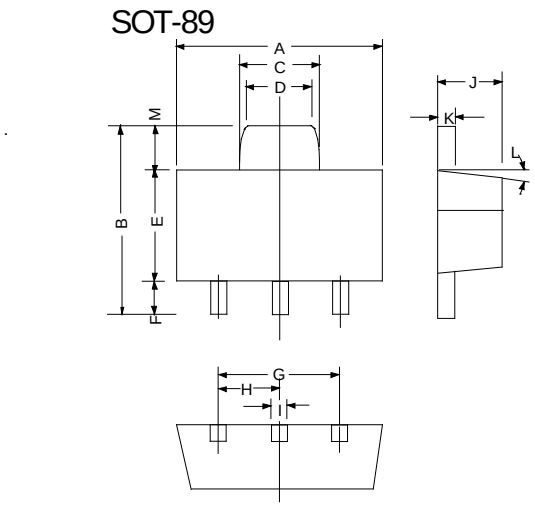

DIMENSIONS				
DIM[N]	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.173	0.181	4.400	4.600
B	0.159	0.167	4.050	4.250
C	0.067	0.075	1.700	1.900
D	0.051	0.059	1.300	1.500
E	0.094	0.102	2.400	2.600
F	0.035	0.047	0.890	1.200
G	0.118REF		3.00REF	
H	0.059REF		1.50REF	
I	0.016	0.020	0.400	0.520
J	0.055	0.063	1.400	1.600
K	0.014	0.016	0.350	0.410
L	10°TYP		10°TYP	
M	0.028REF		0.70REF	

Preliminary and all contents are subject to change without prior notice.
© Seaward Electronics, Inc., 2006. • www.seawardinc.com.cn • Page 5

Customer Support

Seaward Electronics Incorporated – China

Section B, 2nd Floor, ShangDi Scientific Office Complex, #22 XinXi Road

Haidian District, Beijing 100085, China

Tel: 86-10-8289-5700/01/05

Fax: 86-10-8289-5706

Seaward Electronics Corporation – Taiwan

2F, #181, Sec. 3, Minquan East Rd,

Taipei, Taiwan R.O.C

Tel: 886-2-2712-0307

Fax: 886-2-2712-0191

Seaward Electronics Incorporated – North America

1512 Centre Pointe Dr.

Milpitas, CA95035, USA

Tel: 1-408-821-6600

© Seaward Electronics, Inc., 2006.