


PARAMETER		UNITS
¹ Inductance Min.	28	μH
¹ Leakage Inductance	0.2 Max.	μH
¹ Interwinding Capacitance	12 Max.	pF
DC Resistance	0.20 ±15%	Ω
Isolation (HI-POT)	500 Min.	V _{RMS}
SRF (Ref.)	12	MHz
Insulation Resistance	10k Min.	MΩ
Power Rating	250	mW

High Frequency Data Line Filter (4 Lines - Two Coils)


Schematic Diagram

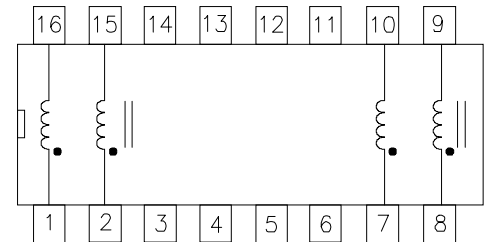

¹Tested at 100KHz and 100 mV_{RMS}

Turns ratio 1:1 ± 1%

Physical Dimensions in inches (mm)

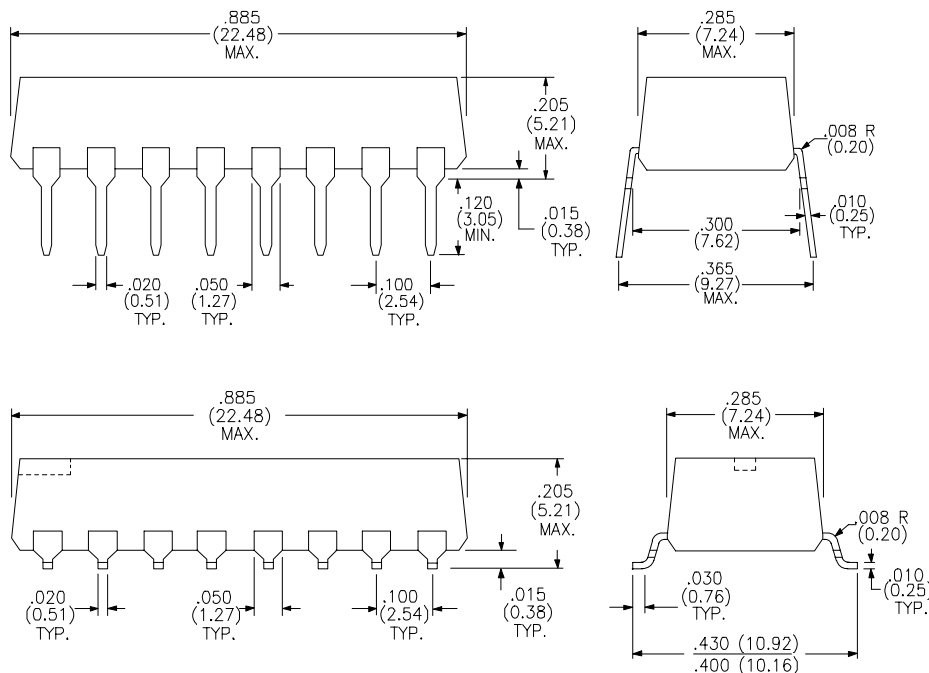

Thru-hole DIP
P/N F-119

Gullwing SMD
P/N F-119G

10/17/96