



WR-112 Flexible Waveguide Twist With a CPR-112G
Flange Operating From 7.05 GHz to 10 GHz

Waveguide Twists Technical Data Sheet

PE-W112TF006-12

Features

- Twelve inch long WR-112 waveguide
- Twistable
- Flexes in both the E and H plane
- Neoprene sleeve allows pressurization
- 7.05 GHz to 10 GHz Frequency Range
- Brass flanges with a silver plated brass body

Applications

- Simplifies positioning parabolic reflectors for line of sight microwave radio links.
- Test Benches
- Eliminates installation problems caused by misalignment.
- Allows expansion/contraction due to thermal issues.
- Pressurized waveguide systems
- Provides vibration isolation
- Microwave Radio

Description

The PE-W112TF006-12 is part of Pasternack's family of flexible, twistable waveguides which operates in the 7.05 to 10 GHz range. The waveguide body is made of a helically wound silver coated brass strip. It can be twisted and/or bent in both the E and H planes without impairing VSWR or attenuation. The waveguide is covered by a neoprene jacket which protects the waveguide, provides mechanical support and allows the waveguide to be pressurized.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
VSWR		1.07:1		
Insertion Loss		0.12		dB

Mechanical Specifications

Waveguide Size	WR-112
Waveguide Design	Twistable
Section Length	12 in [304.8 mm]
E-Plane Minimum Bend Radius, One Time	3 in [76.2 mm]
E-Plane Minimum Bend Radius, Repeated	12 in [304.8 mm]
H-Plane Minimum Bend Radius, One Time	6 in [152.4 mm]
H-Plane Minimum Bend Radius, Repeated	24 in [609.6 mm]
Maximum Offset Rotation, One Time	80 degrees/ft
Maximum Offset Rotation, Repeated	20 degrees/ft
Maximum Operating Pressure	35 psig

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-12](#)



WR-112 Flexible Waveguide Twist With a CPR-112G
Flange Operating From 7.05 GHz to 10 GHz

Waveguide Twists Technical Data Sheet

PE-W112TF006-12

Description	Flange 1	Waveguide	Flange 2
Interface	CPR-112G	WR-112	CPR-112G
Material	Brass	Brass	Brass
Plating		Silver	
Color	Gold	Black	Gold

Environmental Specifications

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant


REACH Compliant

12/17/2014

Plotted and Other Data

Notes:

Typical Performance Data

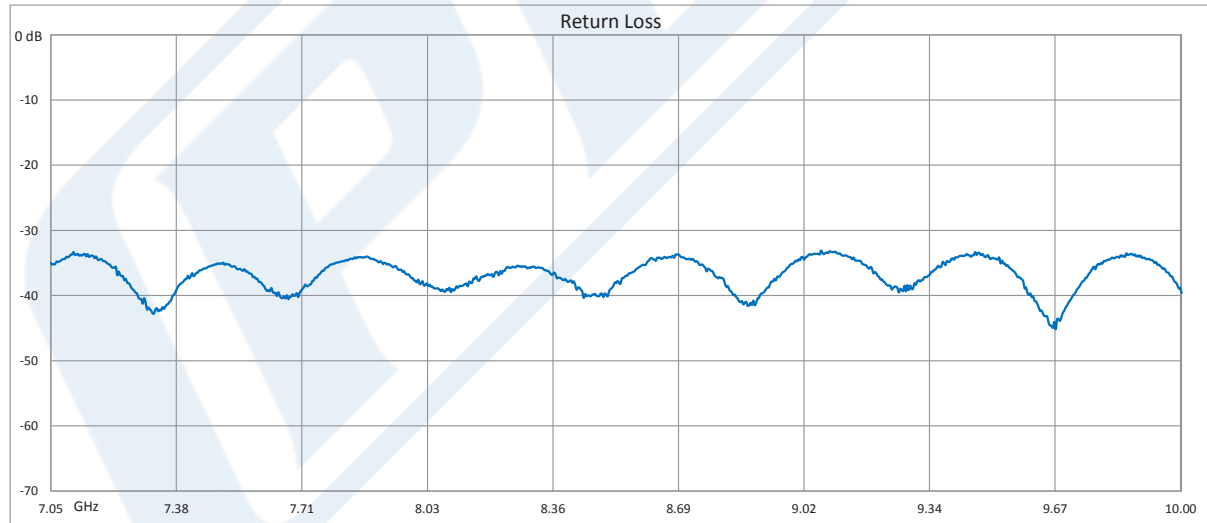


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-12](#)



WR-112 Flexible Waveguide Twist With a CPR-112G
Flange Operating From 7.05 GHz to 10 GHz

Waveguide Twists Technical Data Sheet

PE-W112TF006-12

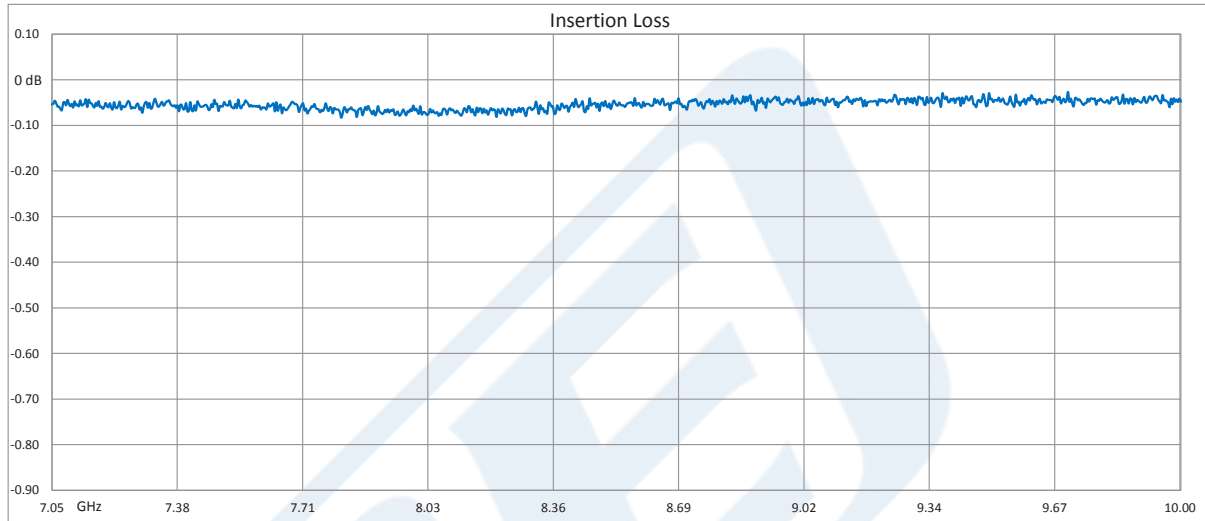

WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-112 Flexible Waveguide Twist With a CPR-112G Flange Operating From 7.05 GHz to 10 GHz PE-W112TF006-12](http://www.pasternack.com/wr-112-flexible-waveguide-twist-cpr112g-7.05-10-ghz-pe-w112tf006-12-p.aspx)


URL: <http://www.pasternack.com/wr-112-flexible-waveguide-twist-cpr112g-7.05-10-ghz-pe-w112tf006-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


PE-W112TF006-12 CAD Drawing

WR-112 Flexible Waveguide Twist With a CPR-112G

Flange Operating From 7.05 GHz to 10 GHz

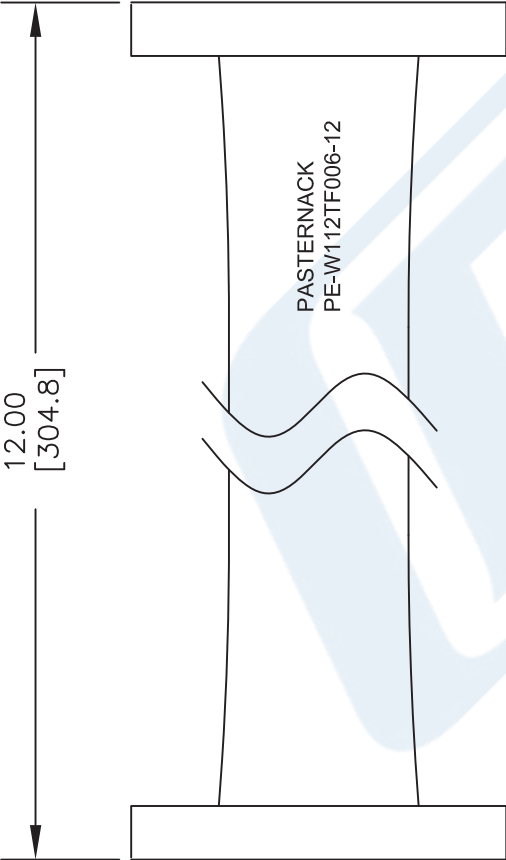

CPR 112G	Dimension	Inches	mm
A		0.497	12.62
B		1.122	28.50
C		2.500	63.50
D		1.906	48.41
E		0.750	19.05
F		1.750	44.45
G		0.625	15.88
H		1.280	32.51

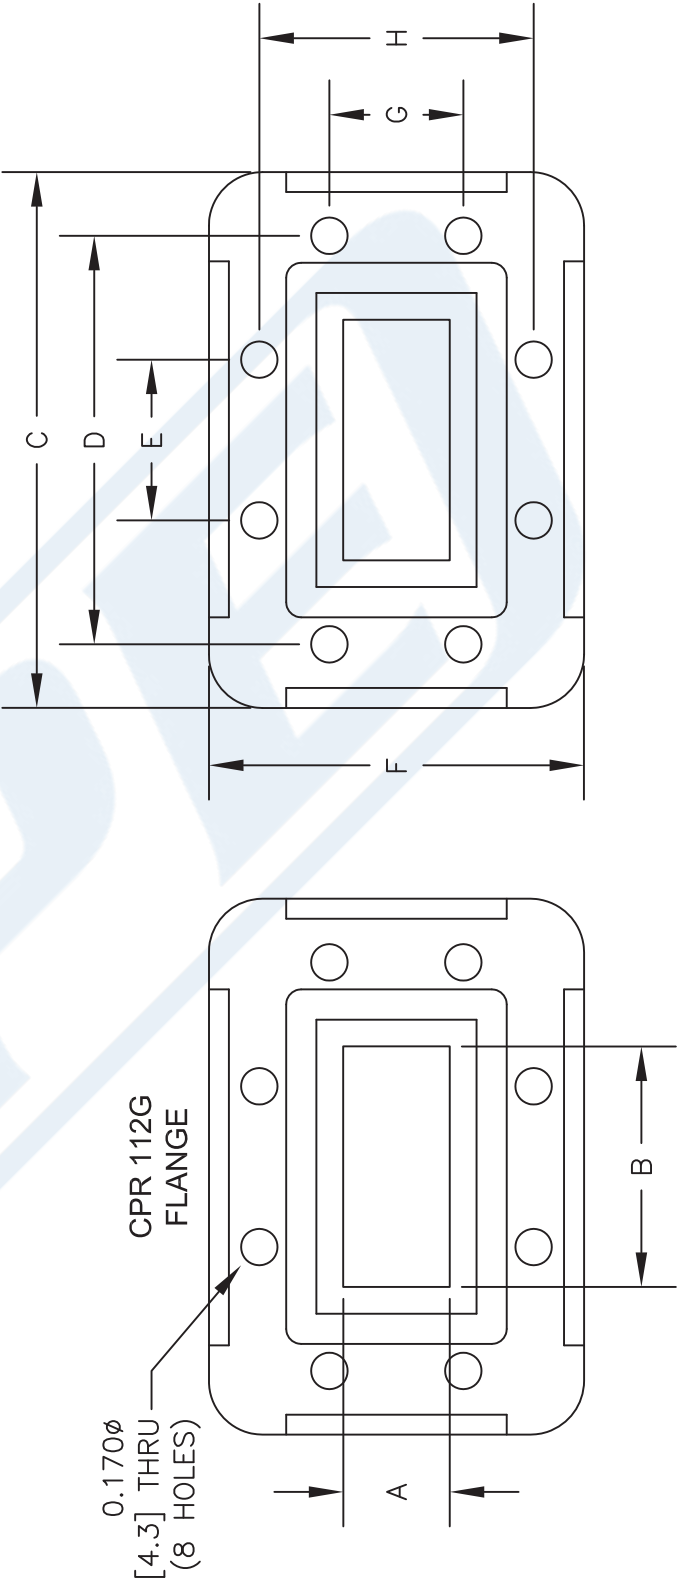

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE-W112TF006-12

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 100115

SCALE N/A

SIZE A

2233