PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe

Electromechanical Relay Switches - PE71S6203

Features

- Transfer Switch
- DC to 12.4 GHz Operating Frequency Range
- 1 M Cycles min
- Failsafe Switch

Applications

- Test & Measurement
- Communications System
- Instrumentation

Description

The PE71S6203 is Transfer Switch that operates from DC to 12.4 GHz. The switch has a Failsafe actuator and 1M life cycles. The switch has an opating voltage of 28 Volts.

Electrical Specifications

Switch Type	Transfer
Actuator	Failsafe
Switching Action	Failsafe

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
Impedance		50		Ohms
Operating Voltage	28	28		Volts
Actuating Current @ 28 Volts			260	mA
Input Power (CW)			40	Watts

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 8	8 to 12.4			GHz
VSWR, Max	1.2:1	1.6:1	1.7:1			
Insertion Loss, Max	0.2	0.5	0.6			dB
Isolation, Min	80	65	60			dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe PE71S6203

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to
12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe

Electromechanical Relay Switches - PE71S6203

Mechanical Specifications

Size

Length	2 in [50.8 mm]
Width/Diameter	2 in [50.8 mm]
Height	2.81 in [71.37 mm]
Weight	0.88 lbs [399.16 g]
Operating Life	1,000,000 Cycles
Switching Time	50 ms Max ( )

Connectors

RF Connector Type	TNC Female

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

Not RoHS Compliant

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe PE71S6203

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered


© 2015 Pasternack Enterprises All Rights Reserved


PASTERNACK®
THE ENGINEER'S RF SOURCE




Transfer Electromechanical Relay Switch DC to
12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe

Electromechanical Relay Switches - PE71S6203

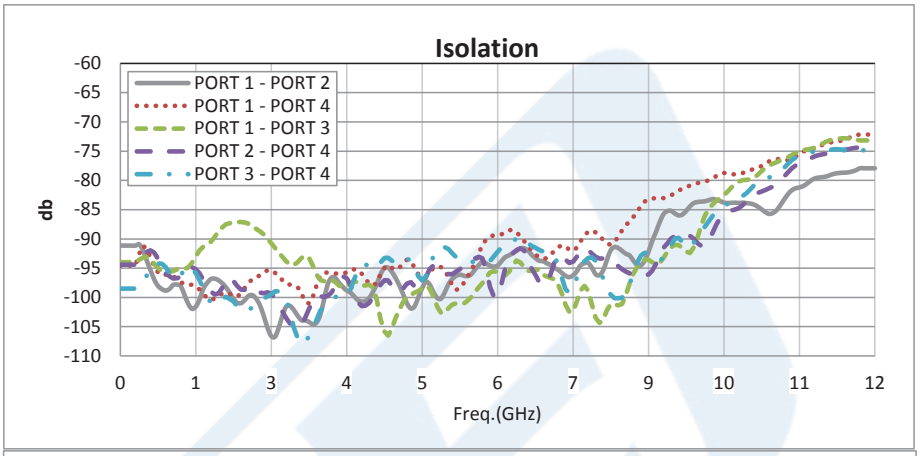

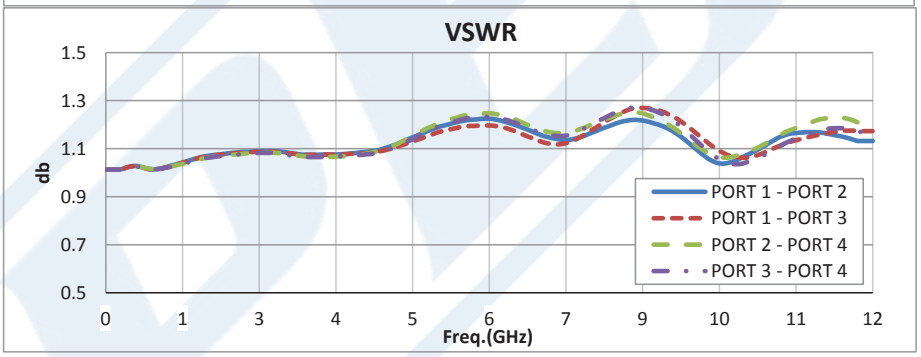

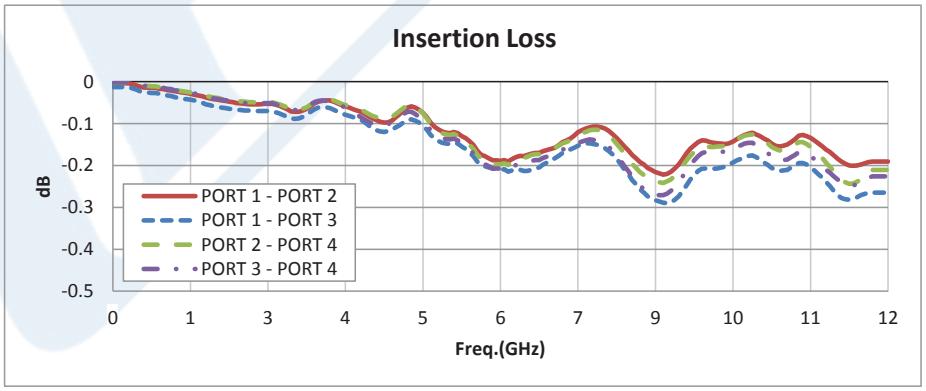

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe PE71S6203

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

PASTERNACK®
THE ENGINEER'S RF SOURCE



Transfer Electromechanical Relay Switch DC to
12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe

Electromechanical Relay Switches - PE71S6203

Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe PE71S6203

URL: http://www.pasternack.com/tnc-transfer-electromechanical-relay-switch-12.4-ghz-failsafe-pe71s6203-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com


ISO 9001 : 2008 Registered

© 2015 Pasternack Enterprises All Rights Reserved

© 2015 Pasternack Enterprises All Rights Reserved

PE71S6203 CAD Drawing

Transfer Electromechanical Relay Switch DC to 12.4 GHz, TNC, 40 Watts, 28V Control with Failsafe

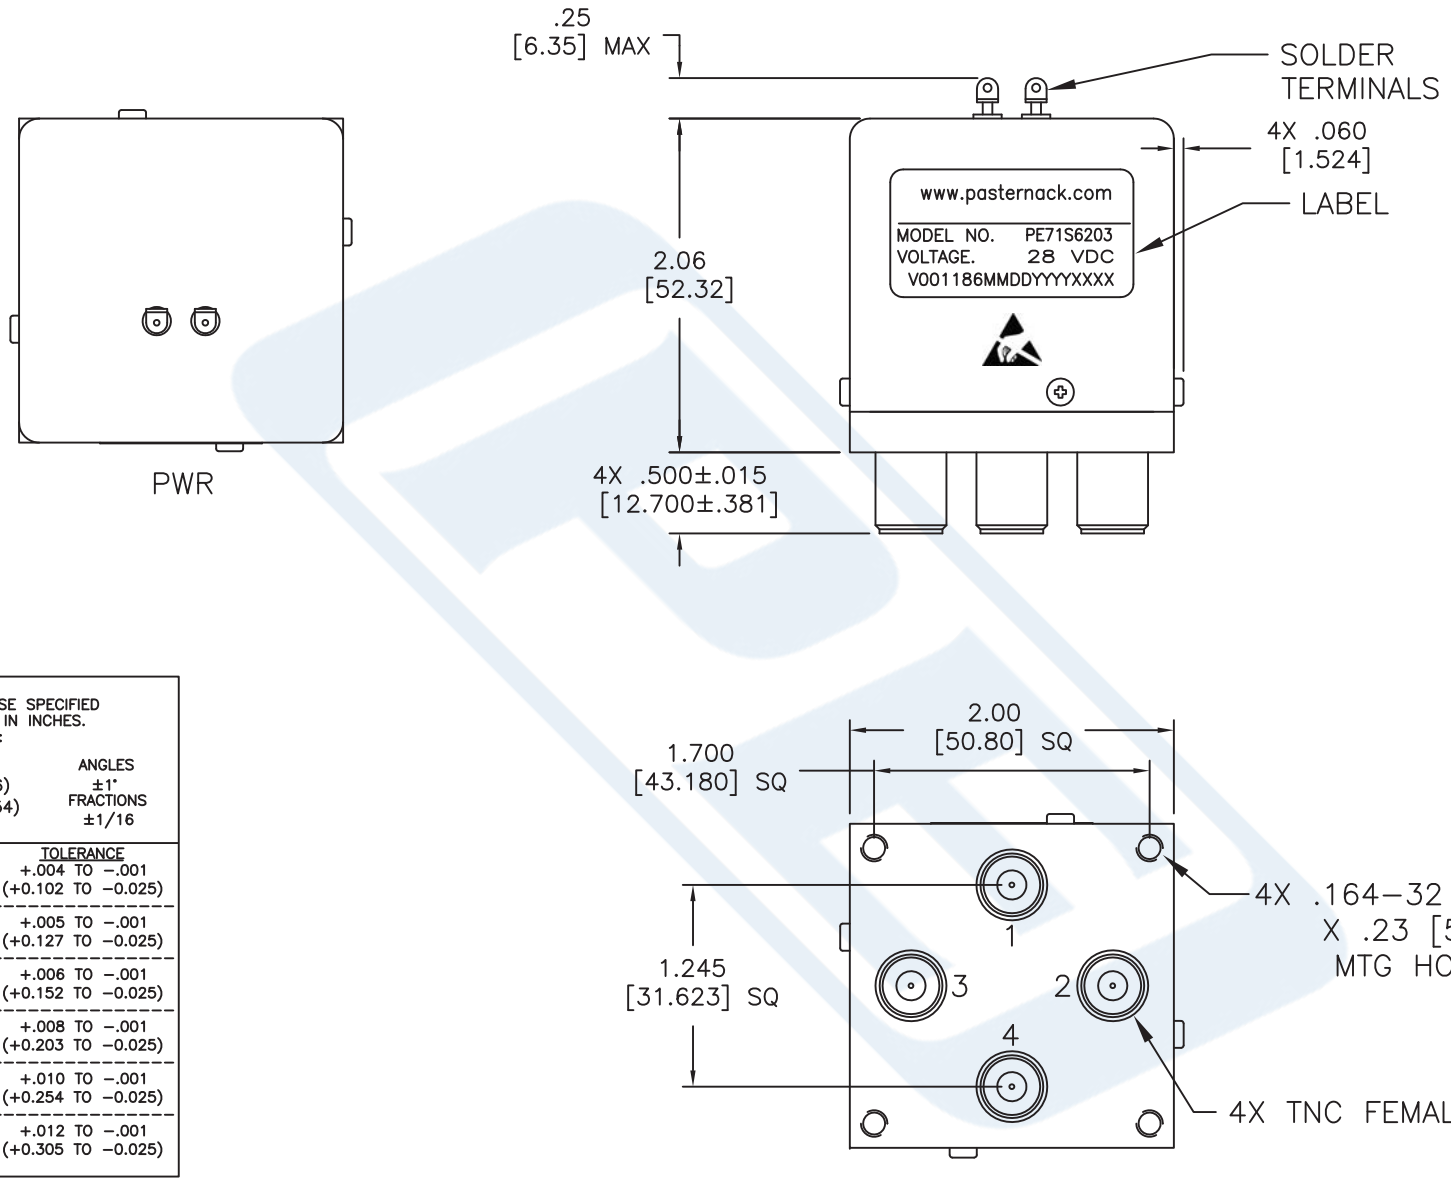

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE:

DECIMALS
.XX ± .03 (0.76)
.XXX ± .010 (0.254)

ANGLES
±1°

FRACTIONS
±1/16

HOLE DIAMETER	TOLERANCE
.0135 TO .125 (0.343 TO 3.175)	+.004 TO −.001 (+0.102 TO −0.025)
.126 TO .250 (3.200 TO 6.350)	+.005 TO −.001 (+0.127 TO −0.025)
.251 TO .500 (6.375 TO 12.700)	+.006 TO −.001 (+0.152 TO −0.025)
.501 TO .750 (12.725 TO 19.050)	+.008 TO −.001 (+0.203 TO −0.025)
.751 TO 1.000 (19.075 TO 25.400)	+.010 TO −.001 (+0.254 TO −0.025)
1.001 TO 2.000 (25.425 TO 50.800)	+.012 TO −.001 (+0.305 TO −0.025)

* THESE DIMENSIONS AND TOLERANCES SUPERSEDE NOTE #1 ON TITLE BLOCK.

PASTERNACK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE


PE71S6203

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919	CAD FILE 062915	SCALE N/A	SIZE A	2233

PE71S6203 CAD Drawing

Transfer Electromechanical Relay Switch DC to 12.4 GHz,
TNC, 40 Watts, 28V Control with Failsafe

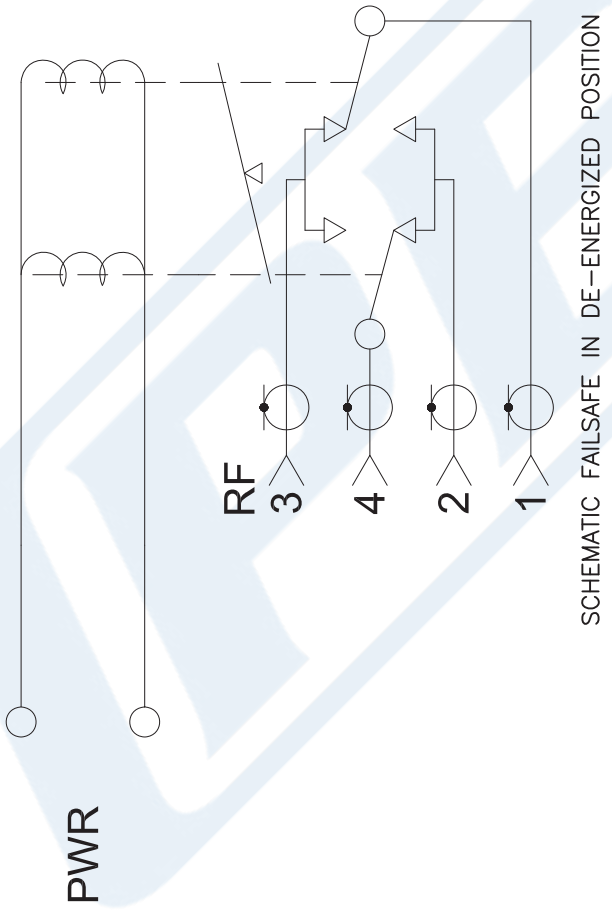

SCHEMATIC FAILSAFE IN DE-ENERGIZED POSITION

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE71S6203

CAD FILE 062915 | SCALE N/A | SIZE A | 2233

FSCM NO. 53919

PASTERNACK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

© 2015 Pasternack Enterprises All Rights Reserved