


SHEET 1 OF 1

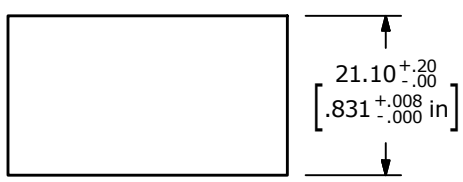


RECOMMENDED
PANEL CUT-OUT

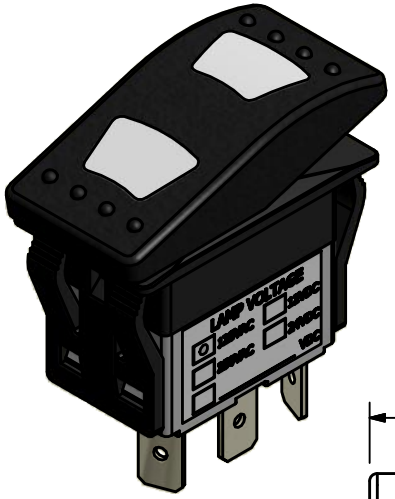

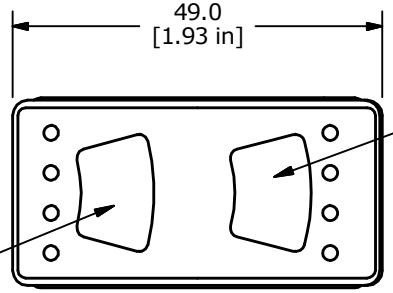



▲


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
1-2	NONE	2-3



CIRCUIT: SPDT
(ON) - OFF - (ON)

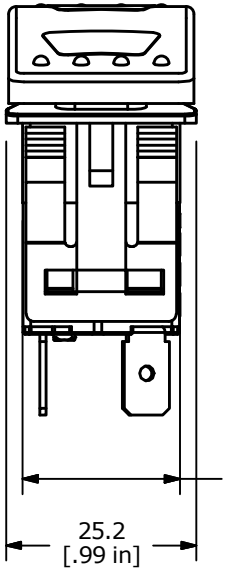

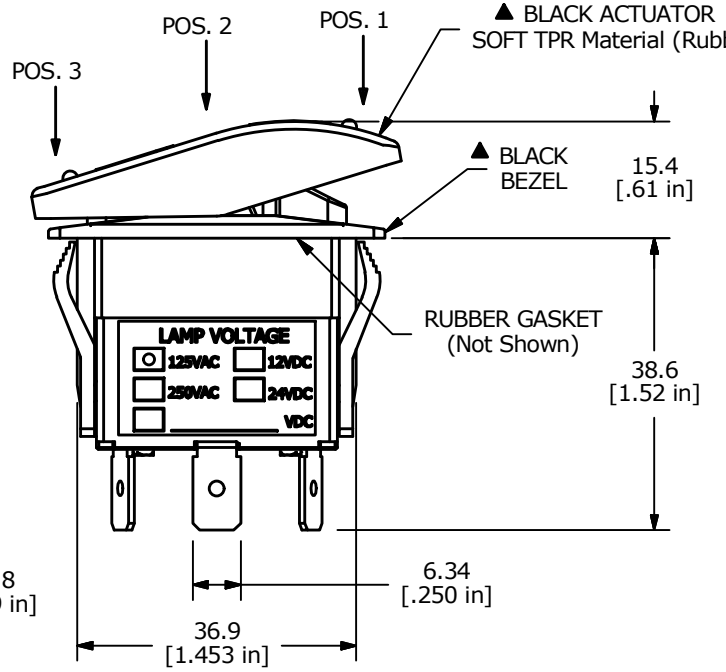

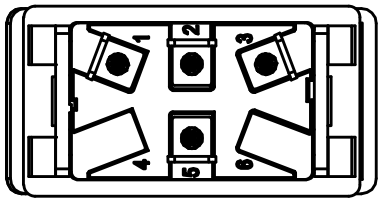

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: RATING: 20(8)A @125/250VAC 50/60Hz, T85/T55
5. ELECTRICAL LIFE: 10,000 CYCLES
6. MECHANICAL LIFE: 30,000 CYCLES
7. CONTACT RESISTANCE: <20 MILLI-OHMS INITIAL
8. DIELECTRIC STRENGTH: >1,500V AC 1MIN
9. INSULATION RESISTANCE: >100 MOHMS @ 500VDC
10. OPERATING TEMP: 0°C to 55°C
▲11. LED VOLTAGE: 125VAC
12. ▲ DENOTES CRITICAL PARAMETER.
13. 2011/65/EU (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	22417	New Release	8/2/16	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

TITLE R713FE3-SXXX4B2RGW

SCALE	DATE	DR	DWG	REV
1:1	8/1/2016	MW	C700032	A