
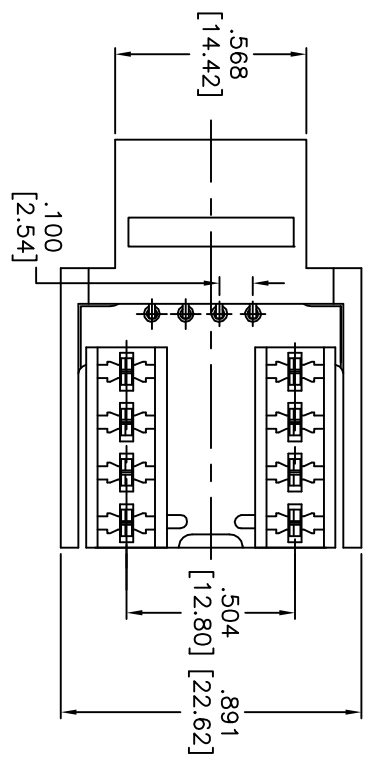


Rev	AWO #	Description	Date	Appr
-	10670	RELEASED	11/01/10	

APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 DATE: \_\_\_\_\_

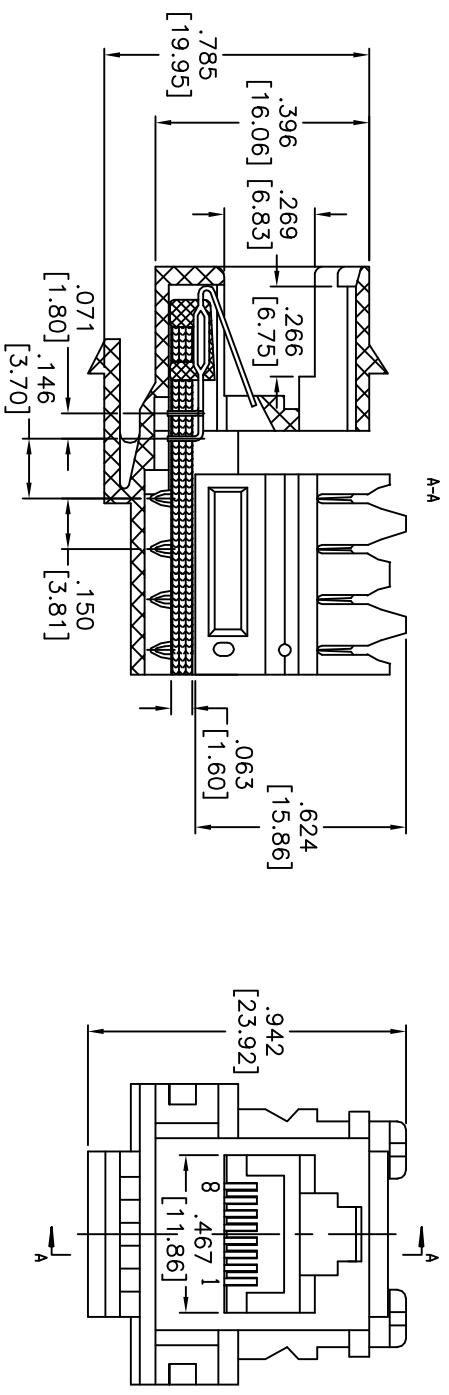

**SPECIFICATIONS:**

**Material:**  
 Housing: ABS, rated UL 94V-0, color Black  
 Contacts: Phosphor Bronze  
**Plating:**  
 Gold over Nickel underplate on contact area.

**Electrical:**  
 Operating voltage: 125 VAC max  
 Current rating: 1.5 Amps max  
 Contact resistance: 45 mohms max  
 Insulation resistance: 1000 Mohms min @ 500 VDC  
 Dielectric withstanding voltage: 1000 VAC for 1 minute  
**Temperature Rating:**  
 Operating temperature: -40°C to +85°C

**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**MODULAR KEYSTONE JACK, 8P8C**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED INCHES		HOLDS	
X	± .10	ØX	± .10		
XX	± .020	ØXX	± .015		
XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	DY		11/01/10	MODULAR KEYSTONE JACK, 8P8C	
CHECKED		SIZE	PART NO.	REV.	
APPROVED		X	MTJK-88-02-C5E		
REF: S00003C		SCALE:	NTS	SHEET 1 OF 1	