


Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna



ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm



RoHS/RoHS II Compliant

MSL = 1

FEATURES

- Dual band chip antenna
- Gain of 2.23dBi | 4.05dBi
- Made using LTCC (low temperature co-fired ceramic) technology
- Small form factor 3.2 x 1.6 x 1.2mm
- Omni-directional

APPLICATIONS


- IoT and wearable
- Wifi
- Bluetooth
- ISM applications

ELECTRICAL CHARACTERISTICS

Item	Specification	
Frequency Range	2400 MHz~2500 MHz	5150 MHz~5850 MHz
Frequency After Matching	2450 MHz	5500 MHz
Bandwidth	100 MHz (typ.)	800 MHz (typ.)
Return Loss	-7 dB (max.)	-7 dB (max.)
Gain	2.23 dBi	4.05 dBi
Impedance	50 Ω	
Azimuth	Omni-directional	
Operating Temperature range	-40°C ~+ 85°C	


MECHANICAL DIMENSIONS (mm)

Antenna Dimension

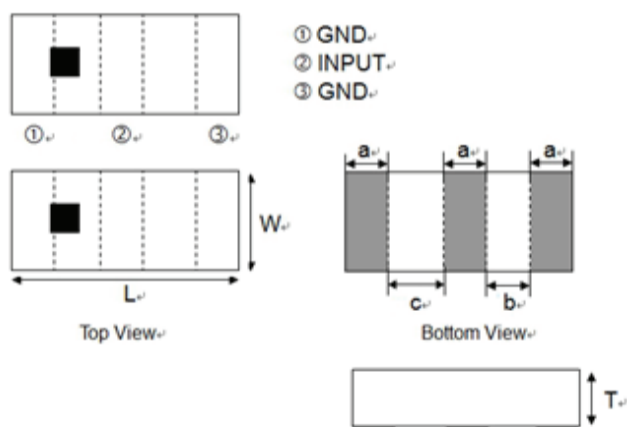


Symbol	L	W	T	a	b	c
Dimensions	3.2±0.2	1.6±0.2	1.2±0.1	0.5±0.1	0.7±0.1	1.0±0.1

Layout Dimension

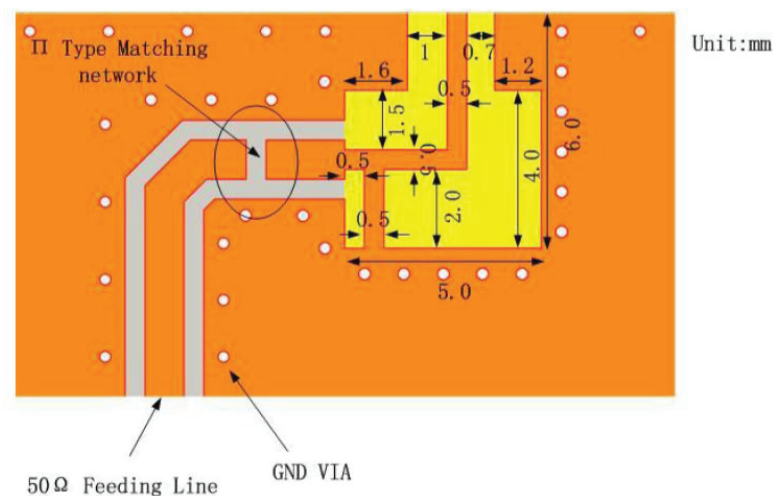

Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna



ACAG0301-24505500-T



3.2 x 1.6 x 1.2mm



RoHS/RoHS II Compliant


MSL = 1

EVALUATION BOARD AND MATCHING CIRCUITS

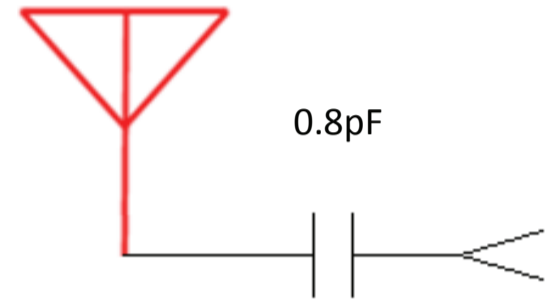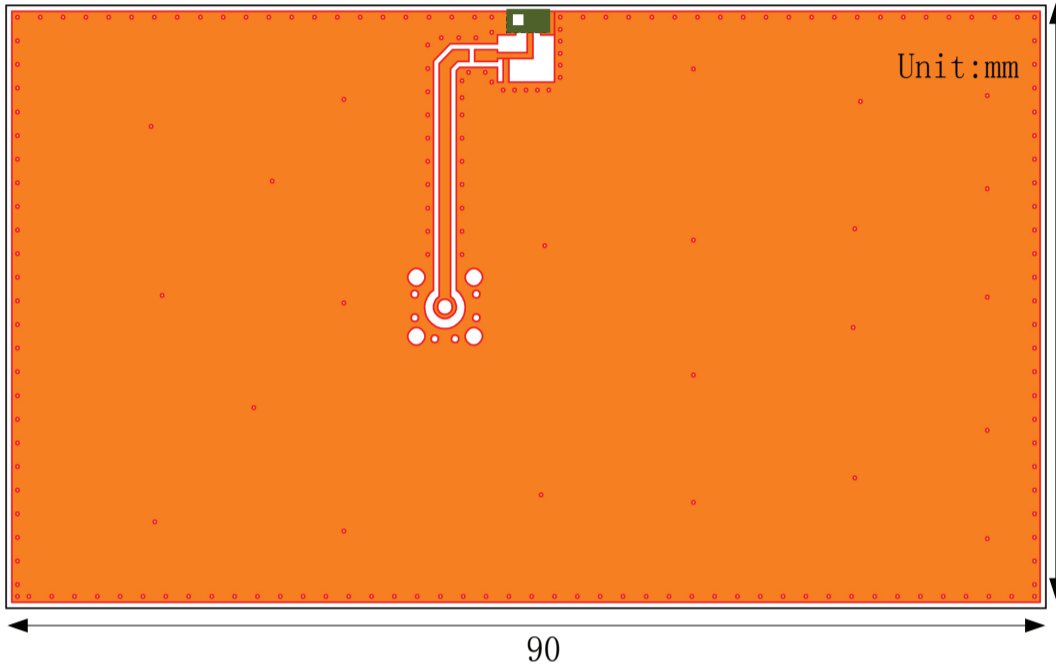


0.8pF

ANTENNA RESPONSE – SMITH CHART AND RETURN LOSS S11

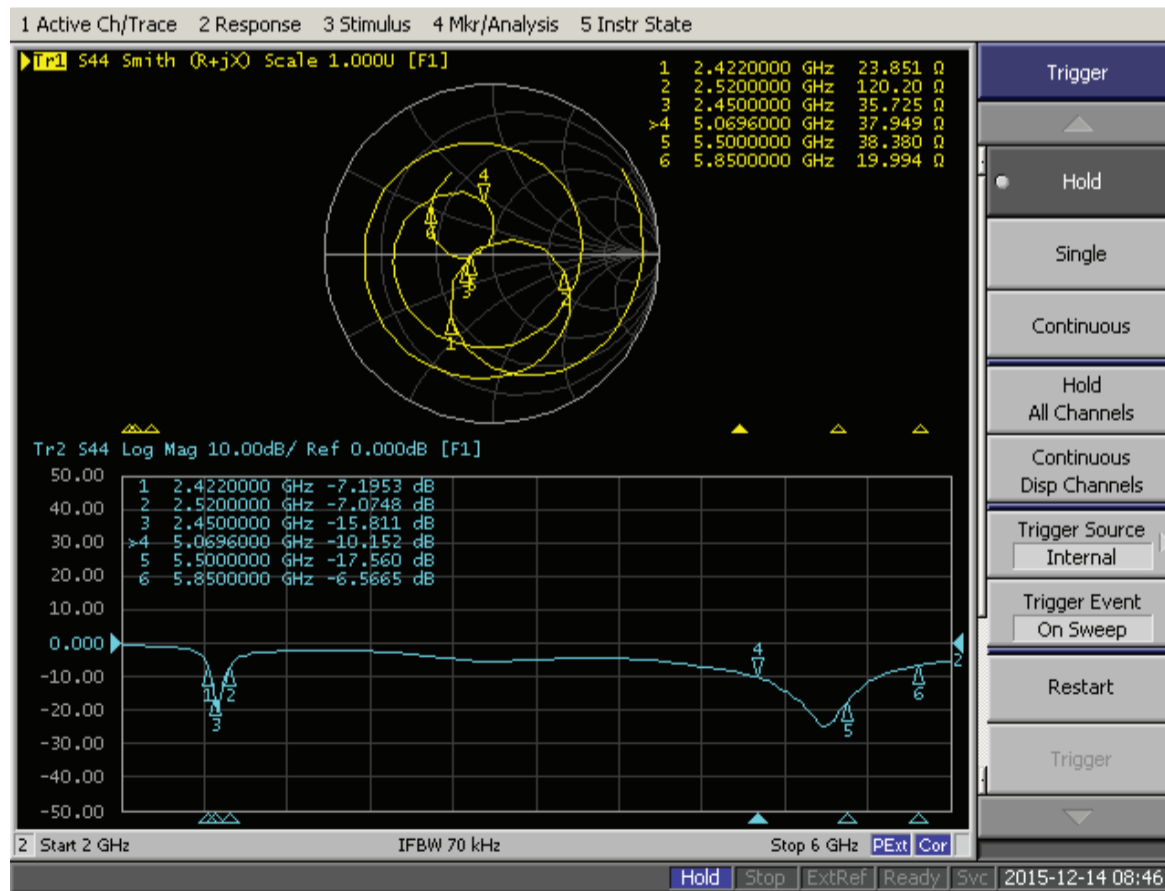

Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna



ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm





RoHS/RoHS II Compliant


MSL = 1

RADIATION PATTERNS


Coordinates

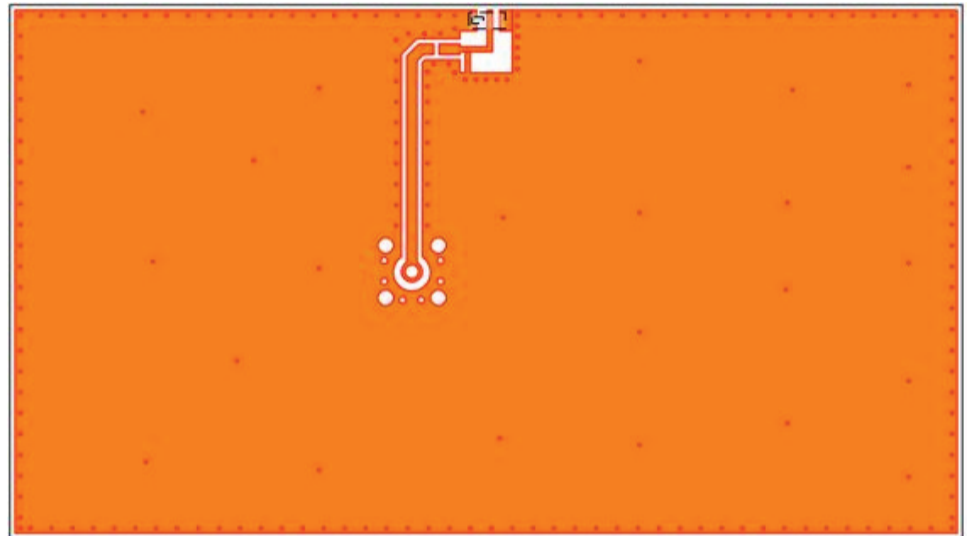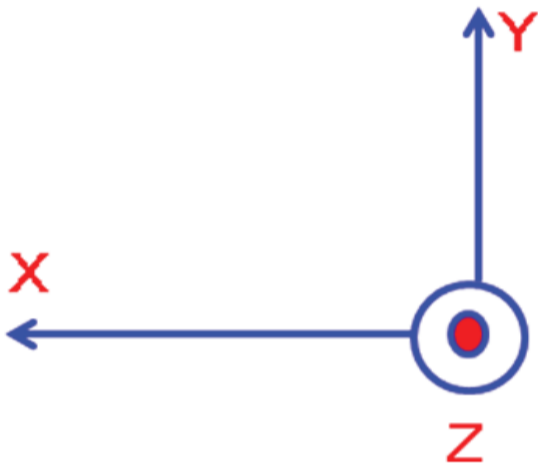


2.4 GHz X-Z Plane

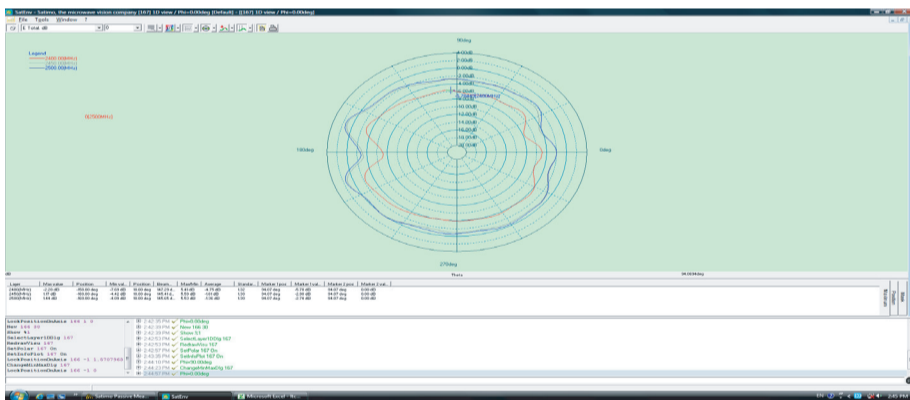


2.4 GHz Y-Z Plane

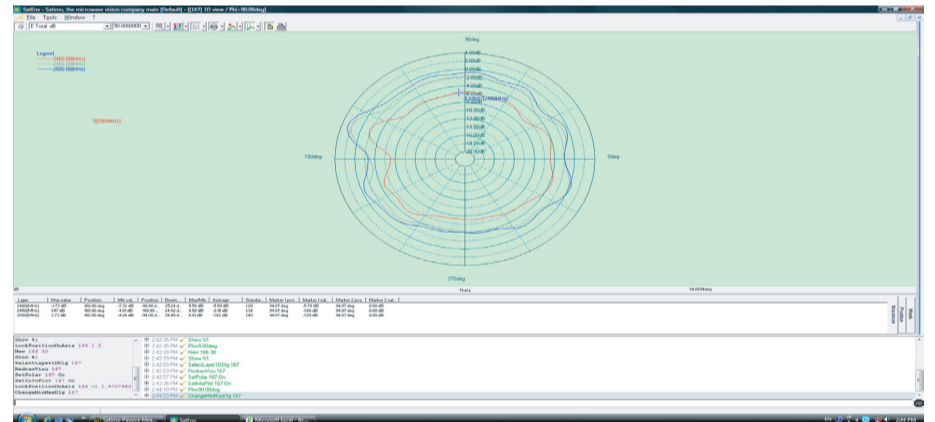


2.4 GHz X-Y Plane

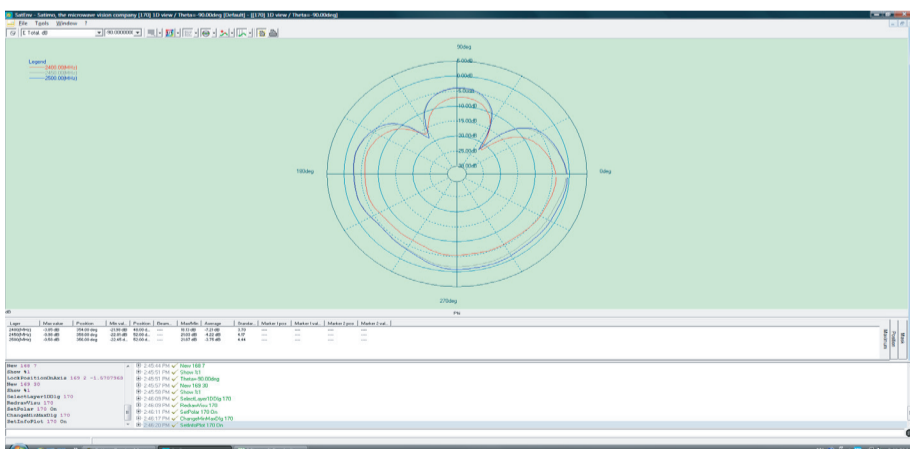

5 GHz X-Z Plane

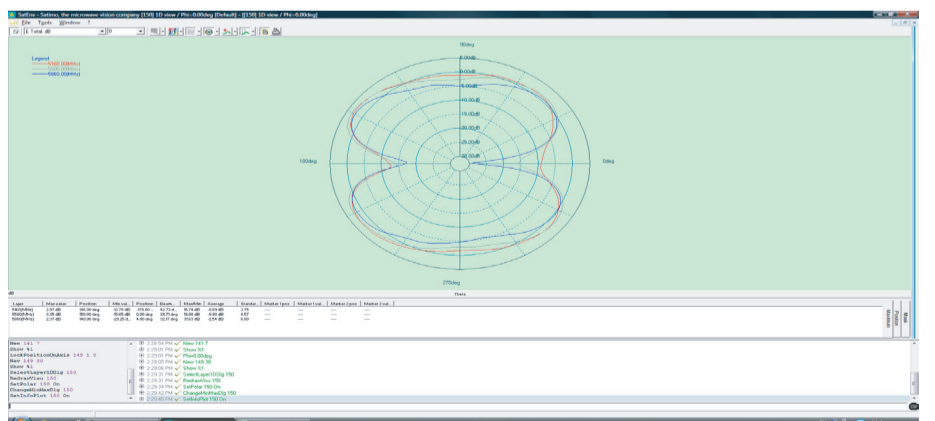

Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna



ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm




RoHS/RoHS II Compliant


MSL = 1

RADIATION PATTERNS

5 GHz Y-Z Plane

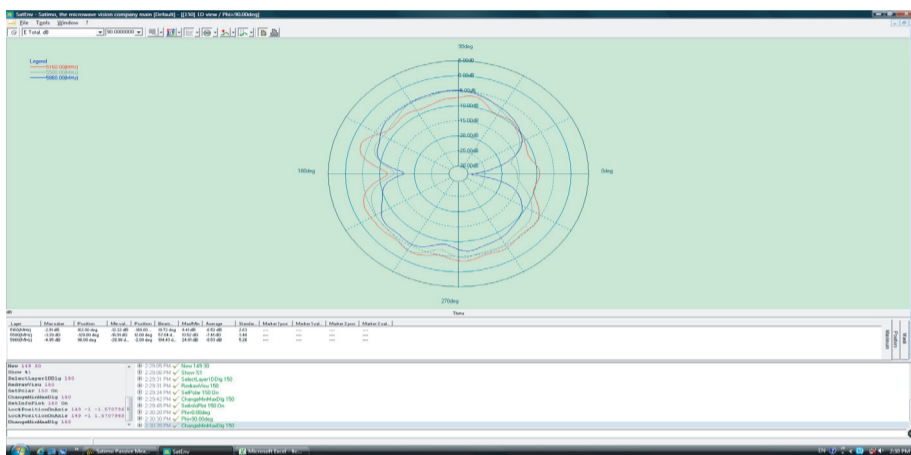


5 GHz X-Y Plane

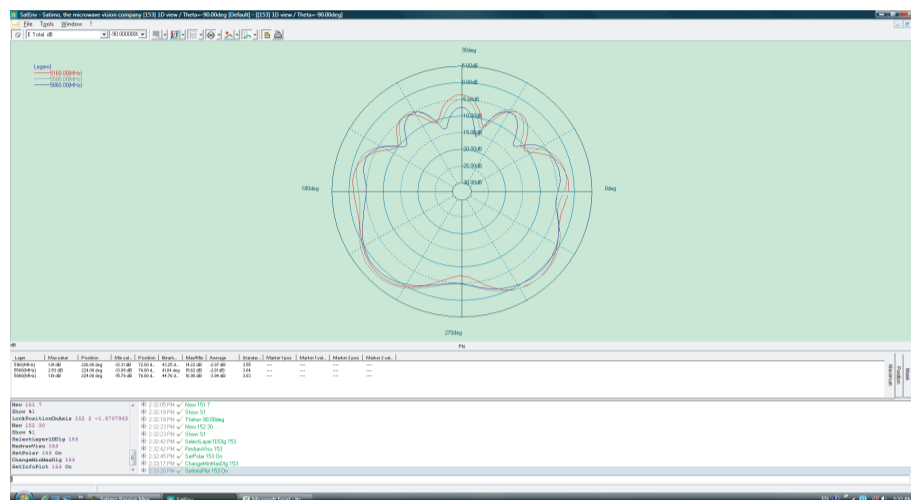


3D RADIATION PATTERNS

2450 MHz

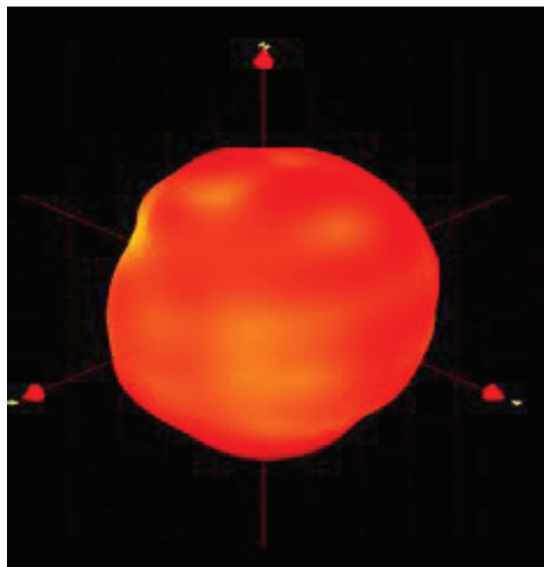


5500 MHz

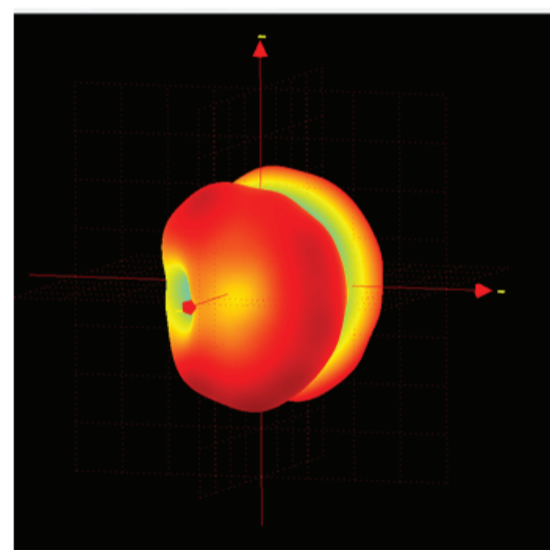

Frequency (MHz)	2400	2450	2500
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	1.95	2.23	2.07
Efficiency (%)	42	66.5	5

Frequency (MHz)	5150	5500	5850
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	3.87	4.05	3.92
Efficiency (%)	70	76.8	64

Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna




ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm

RoHS/RoHS II Compliant

MSL = 1


REFLOW SOLDERING STANDARD CONDITION

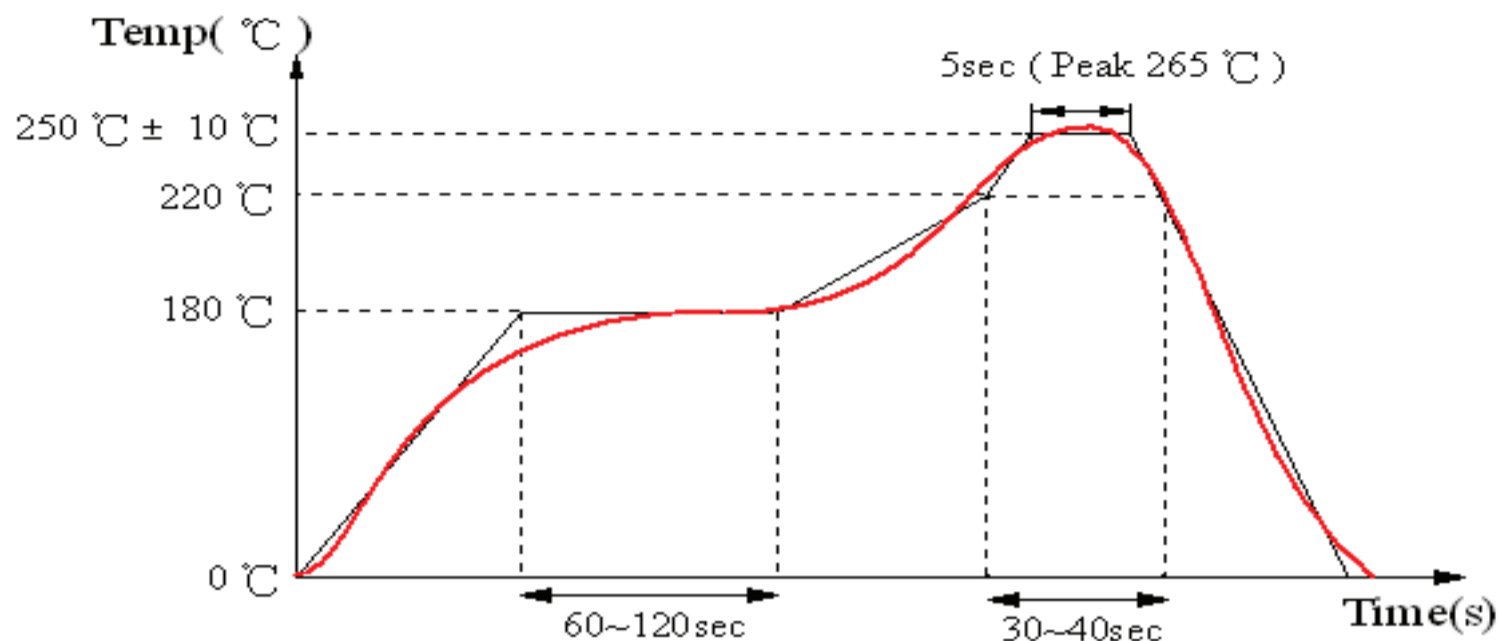

PACKAGING

Reel (3000 pcs/Reel)

Size of the carton: 330 x 210 x 210 mm

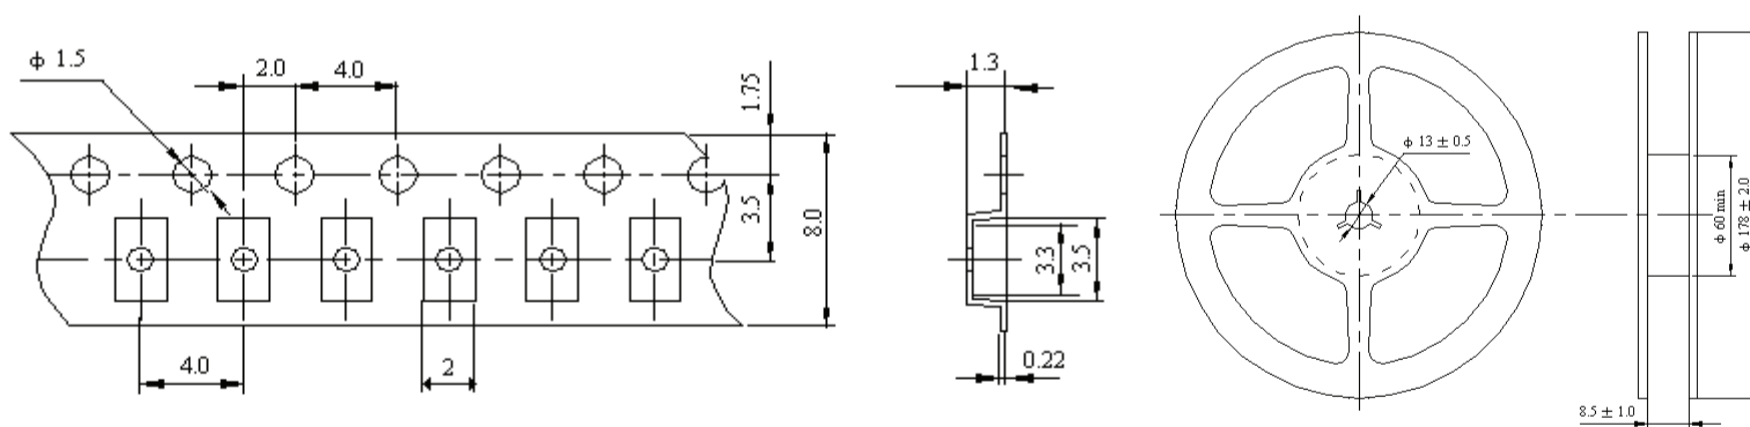


Storage Temperature Range : <30 degree C, Humidity : <60%RH

MSL - 1

Oxidizable, 12 months in a vacuum sealed bag.

Once opened, please repack the unused items within 168 hours by re-seal package treatment.

Dual band (2.4 GHz & 5.5 GHz) WiFi/Bluetooth Chip Antenna



ACAG0301-24505500-T



3.2 x 1.6 x 1.2mm
RoHS/RoHS II Compliant

MSL = 1

CAUTIONS

1. Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

2. Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

3. Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as on the patterns as this will change the performance of the antenna.