FR101SG THRU FR107SG

Reverse Voltage - 50 to 1000 Volts Forward Current - 1.0 Ampere


FAST RECOVERY GLASS PASSIVATED RECTIFIERS

Features

A-405

RoHS COMPLIANT

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- Idea for printed circuit board
- Fast switching for high efficiency
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed 250℃/10 seconds at terminals

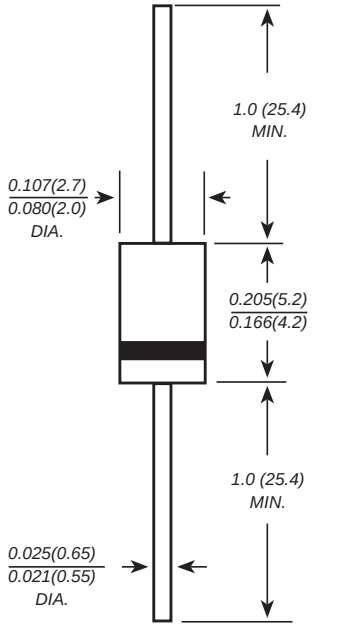

Dimensions in inches and (millimeters)

Mechanical Data

Case : JEDEC A-405 Molded plastic body
Terminals : Solder plated, solderable per MIL-STD-750,Method 2026
Polarity : Polarity symbol marking on body
Mounting Position : Any
Weight : 0.008 ounce, 0.23 grams

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unlss otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

Parameter	SYMBOLS	FR101SG	FR102SG	FR103SG	FR104SG	FR105SG	FR106SG	FR107SG	UNITS
Marking Code		MDD FR101SG	MDD FR102SG	MDD FR103SG	MDD FR104SG	MDD FR105SG	MDD FR106SG	MDD FR107SG	
Maximum repetitive peak reverse voltage	V_{RMM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current at T_A=75℃	$I_{(AV)}$	1.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed onrated load (JEDEC Method)	I_{FSM}	30							A
Maximum instantaneous forward voltage at 1.0A	V_F	1.30							V
Maximum DC reverse current T_A=25℃ at rated DC blocking voltage T_A=100℃	I_R	5.0 50.0							μA
Maximum reverse recovery time (NOTE 1)	trr	150				250	500		ns
Typical junction capacitance (NOTE 2)	C_J	15.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	50.0							℃/W
Operating junction and storage temperature range	T_J,T_{STG}	-65 to +150							℃

Note:1.Reverse recovery condition I_F=0.5A,I_R=1.0A,Irr=0.25A
2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.
3.Thermal resistance from junction to ambient at 0.375"(9.5mm)lead length,P.C.B. mounted

Download from alldatasheet.com

Ratings And Characteristic Curves

FIG. 1- FORWARD CURRENT DERATING CURVE

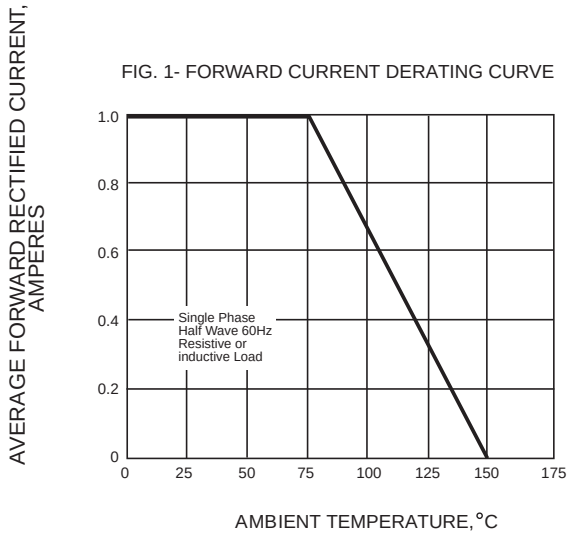


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

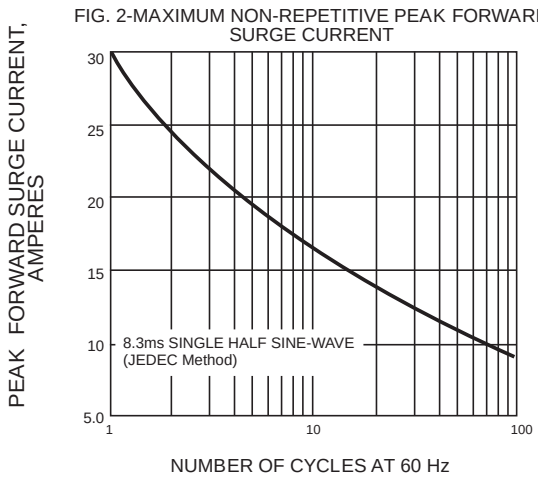


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

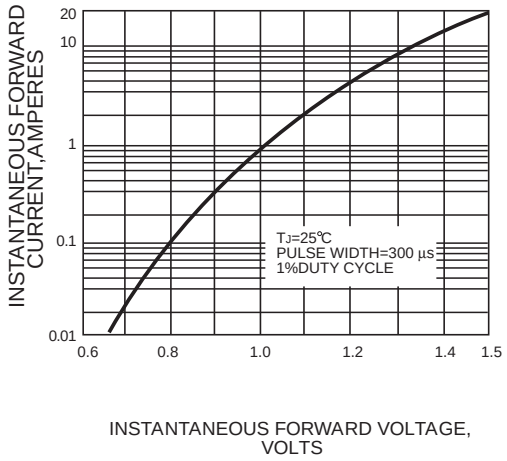


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

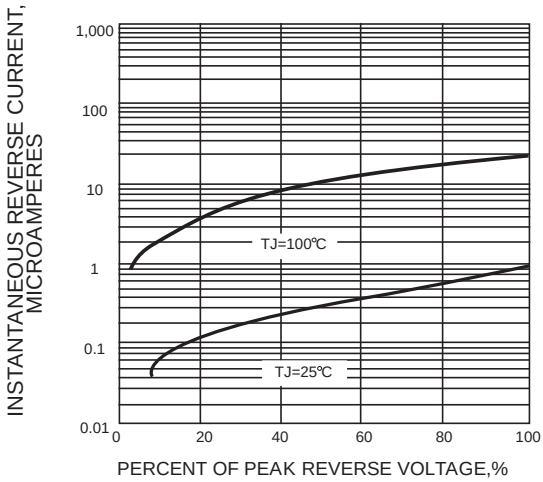


FIG. 5-TYPICAL JUNCTION CAPACITANCE


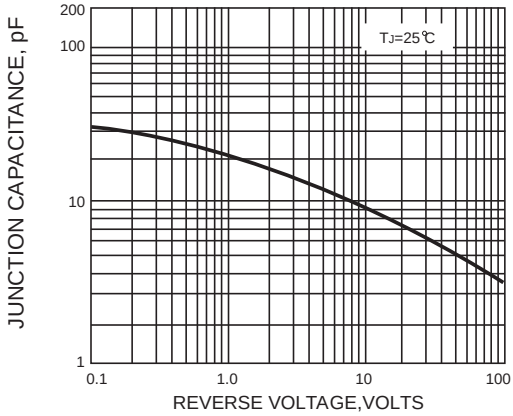


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

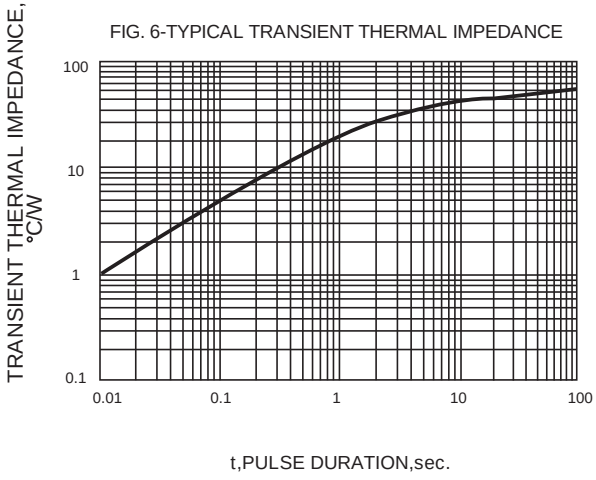

The curve above is for reference only.

Download from alldatasheet.com