


型号: KH-IPEX3-SMA-RG081-50mm

REVISIONS					
REV	NUMBER	DESCRIPTION	DWN	CHK	DATE
A		DESIGN			

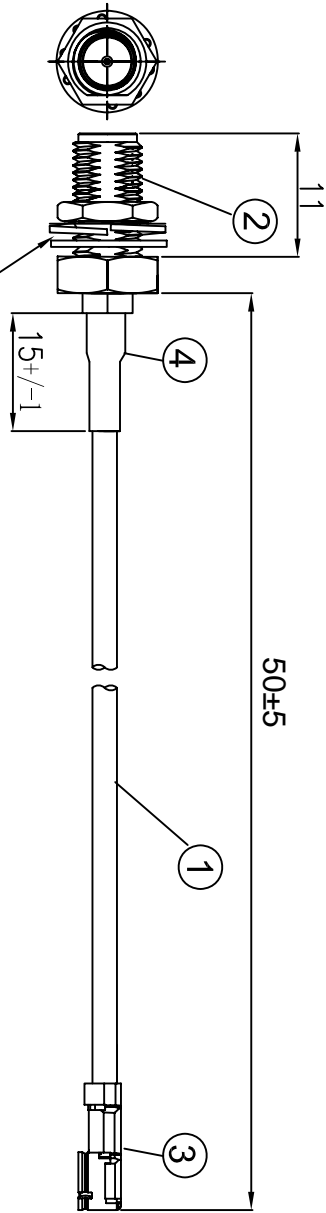

三個配件出貨時另外附配件出貨(墊片,華司,螺母)

NOTES:

1. ELECTRICAL:
  - 1.1. VOLTAGE RATING:DCV 300V 10MS
  - 1.2. CONDUCTANCE RESISTANCE:3.0 OHMMAX.
  - 1.3. INSULATION RESISTANCE:5.0M OHMMIN.
  - 1.4. THE CABLE SHOULD BE 100% ELECTRICAL TEST
  - 1.5. IT SHOULD BE NO ANY OPEN/SHORT, MISWIRING AND INTERMITTENT FAILURES.
2. MATERIAL:
  - 2.1. SEE TABLE
3. ALL COMPONENTS ARE ROHS COMPLIANT.

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
④	套管	黑色热缩套管, OD:2.0MM	AS
③	端子	高仿IPEX 0.81 3代端子, 镀金	1
②	接头	SMA母头母针, 分体, 11牙, 镀金	1
①	同轴线	RF 0.81线材,颜色: 黑色, OD:0.81mm	AS


金航标电子有限公司

ALL DIMENSION ARE IN MM  
DRAWN Jany  
DATE 2020-06-18

COMPUTER GENERATED IN SOLIDWORKS  
MFG.  
Q.A.  
DO NOT SCALE THIS DRAWING  
GENERAL TOLERANCE FOR ANGLES X.X X.XX X.XXX ± 1° ± 0.3 ± 0.25 ± 0.150

I-PEX 0.81 3代 TO SMA /F L= 50 mm

PROJECTION	SIZE Number	REV
	B	A
CUSTOMER P.N.:	SCALE: Free	TYPE
		SHEET 1 OF 1



技术详询

4

3

2

1

4

3

2

1

D

C

B

A

D

C

B

A