

ID244K01

8MB Flash Memory Card

(Model No.: ID244K01)

Spec No.: EL094094
Issue Date: April 10, 1997

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.

(1) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (2), even for the following application areas, be sure to observe the precautions given in Paragraph (2). Never use the products for the equipment listed in Paragraph (3).

- Office electronics
- Instrumentation and measuring equipment
- Machine tools
- Audiovisual equipment
- Home appliances
- Communication equipment other than for trunk lines

(2) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.

- Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
- Mainframe computers
- Traffic control systems
- Gas leak detectors and automatic cutoff devices
- Rescue and security equipment
- Other safety devices and safety equipment, etc.

(3) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communications equipment for trunk lines
- Control equipment for the nuclear power industry
- Medical equipment related to life support, etc.

(4) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.

- Please direct all queries regarding the products covered herein to a sales representative of the company.

Contents

1. General Descriptions	p. 2
2. Features	p. 2
3. Block Diagram	p. 3
4. Pin Connections	p. 4
5. Function Chart	p. 5
5.1 Memory Block	p. 5
5.1.1 Memory Configuration	p. 5
5.1.2 Memory Erase Unit	p. 5
5.2 Function Table	p. 6
5.3 Software Command	p. 7, 8
5.4 Status Register	p. 9
5.5 Programming Flowchart	p. 10, 11
5.6 Erase Algorithm	p. 12, 13
6. Absolute Maximum Ratings	p. 14
7. Recommended Operating Conditions	p. 14
8. Capacitance	p. 14
9. Read Operation	p. 15
9.1 DC Characteristics	p. 15
9.2 AC Characteristics	p. 15, 16, 17
10. Programming Operation	p. 17
10.1 DC Characteristics	p. 17
10.2 AC Characteristics	p. 18, 19, 20
11. Erase Operation	p. 21
11.1 DC Characteristics	p. 21
11.2 AC Characteristics	p. 21, 22, 23, 24
12. Block Erase and Data Write Characteristics	p. 25
13. Voltage Timing	p. 25
14. Attribute Memory	p. 26
14.1 Attribute Memory Read/Write Function Table	p. 26
14.2 AC Characteristics	p. 26
14.3 Attribute Memory Read Cycle	p. 27
14.4 Attribute Memory Write Cycle	p. 28, 29
15. Specification Changes	p. 30
16. Other Precautions	p. 30
17. External Diagrams	p. 31
18. Packing Specification	p. 32
19. External Appearances	p. 33

1. General Descriptions

The SHARP ID244K01, which panel design is SHARP standard, is a 16MB Flash Memory PC Card conforms to PCMCIA Release 2.0 and is offered to customers giving aim to confirm an external shape or electrical performances of the card. Before mass production, we will create a new product name dedicated for a customer and also present a specification which implies customer's request including panel design.

2. Features

- | | | |
|------|--|--|
| 2.1 | Type | 16MB Flash Memory Card
(Conforms to PCMCIA Rel.2.0) |
| 2.2 | Memory Capacity | |
| | Common Memory | 16M words×8 bits or 8M words×16 bits |
| | Attribute Memory | EEPROM Model 2k words×8 bits read/write |
| | Note) We have another type of attribute memory as follows. | |
| | | No EEPROM Model. (5 words×8 bits read only in card's control circuit) |
| | | Sample card name: ID244K02. Customers can choose one model from two. |
| 2.3 | Supply Voltage | |
| | Read Cycle | Vcc=5±0.5V, Vpp1, Vpp2=0~1.5V |
| | Read/Program/Erase Cycle | Vcc=5±0.5V, Vpp1, Vpp2=5.0V±0.5V/12.0V±0.6V |
| 2.4 | Erase Unit | Block(64k bytes/byte access, 128k bytes/word access) |
| 2.5 | Program/Erase Cycles | 100,000 cycles |
| 2.6 | Interface | Parallel I/O Interface |
| 2.7 | Function Table | See Function Table in page.6 |
| 2.8 | External Dimensions | 54×85.6×3.3 mm |
| 2.9 | Pin Connections | See Pin Connections in page.4 |
| 2.10 | Type of Connector | Conforms to PCMCIA Rel.2.0 Card Use Connector
(Card connector: JC20-J68S-NB3 JAE or
FCN-568J068-G/O Fujitsu) |
| 2.11 | Average Weight | 30g |
| 2.12 | Operating Temp Range | 0 to 60°C |
| 2.13 | Storage Temp Range | -20 to 65°C |
| 2.14 | External Appearance | External appearance shall be free of any dirt,
cratches and abnormalities that could adversely
affect sales. |
| 2.15 | Manufacturer's Code | The manufacturer's code shall be printed on the
memory card directly or on the seal which is then
attached to the memory card. |
| 2.16 | Brand Name | The user's brand name will be used. |
| 2.17 | Not designed or rated radiation hardened. | |

4. Pin Connections

PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL	PIN	SIGNAL
1	GND	18	V _{pp1}	35	GND	52	V _{pp2}
2	D3	19	A16	36	CD1	53	A22
3	D4	20	A15	37	D11	54	A23
4	D5	21	A12	38	D12	55	A24 (NC)
5	D6	22	A7	39	D13	56	A25 (NC)
6	D7	23	A6	40	D14	57	NC
7	CE1	24	A5	41	D15	58	NC
8	A10	25	A4	42	CE2	59	NC
9	OE	26	A3	43	NC	60	NC
10	A11	27	A2	44	NC	61	REG
11	A9	28	A1	45	NC	62	BVD2
12	A8	29	A0	46	A17	63	BVD1
13	A13	30	D0	47	A18	64	D8
14	A14	31	D1	48	A19	65	D9
15	WE / PGM	32	D2	49	A20	66	D10
16	RDY/ BSY	33	WP	50	A21	67	CD2
17	V _{cc}	34	GND	51	V _{cc}	68	GND

Pin Descriptions:

D0~D7	Data Bus (Input/Output)
D8~D15	Data Bus (Input/Output)
A0~A23	Address Bus (Input)
CE1, CE2	Card Enable (Input)
OE	Output Enable (Input)
WE/PGM	Write Enable/Program (Input)
CD1, CD2	Card Detect (Output)(Card Inserted Detection Signal)
WP	Write Protect (Output)(in write protect mode, the WP output signal is "HIGH")
V _{pp1}	Program/Erase Power Supply(Even Byte)
V _{pp2}	Program/Erase Power Supply(Odd Byte)
REG	Register Select (Input)
BVD1, BVD2	Battery Voltage Detect(Always "HIGH")
RDY/BSY	Ready/Busy (Output)

Notes: Pin 55: Address bit 24 and Pin 56: Address bit 25 are no connection.

5. Function


5.1 Memory Block

5.1.1 Memory Configuration 8Mbits Flash Memory x 16 Devices.

5.1.2 Memory Erase Unit Block Erase

Block : Byte Mode 64k bytes

Word Mode 128k bytes

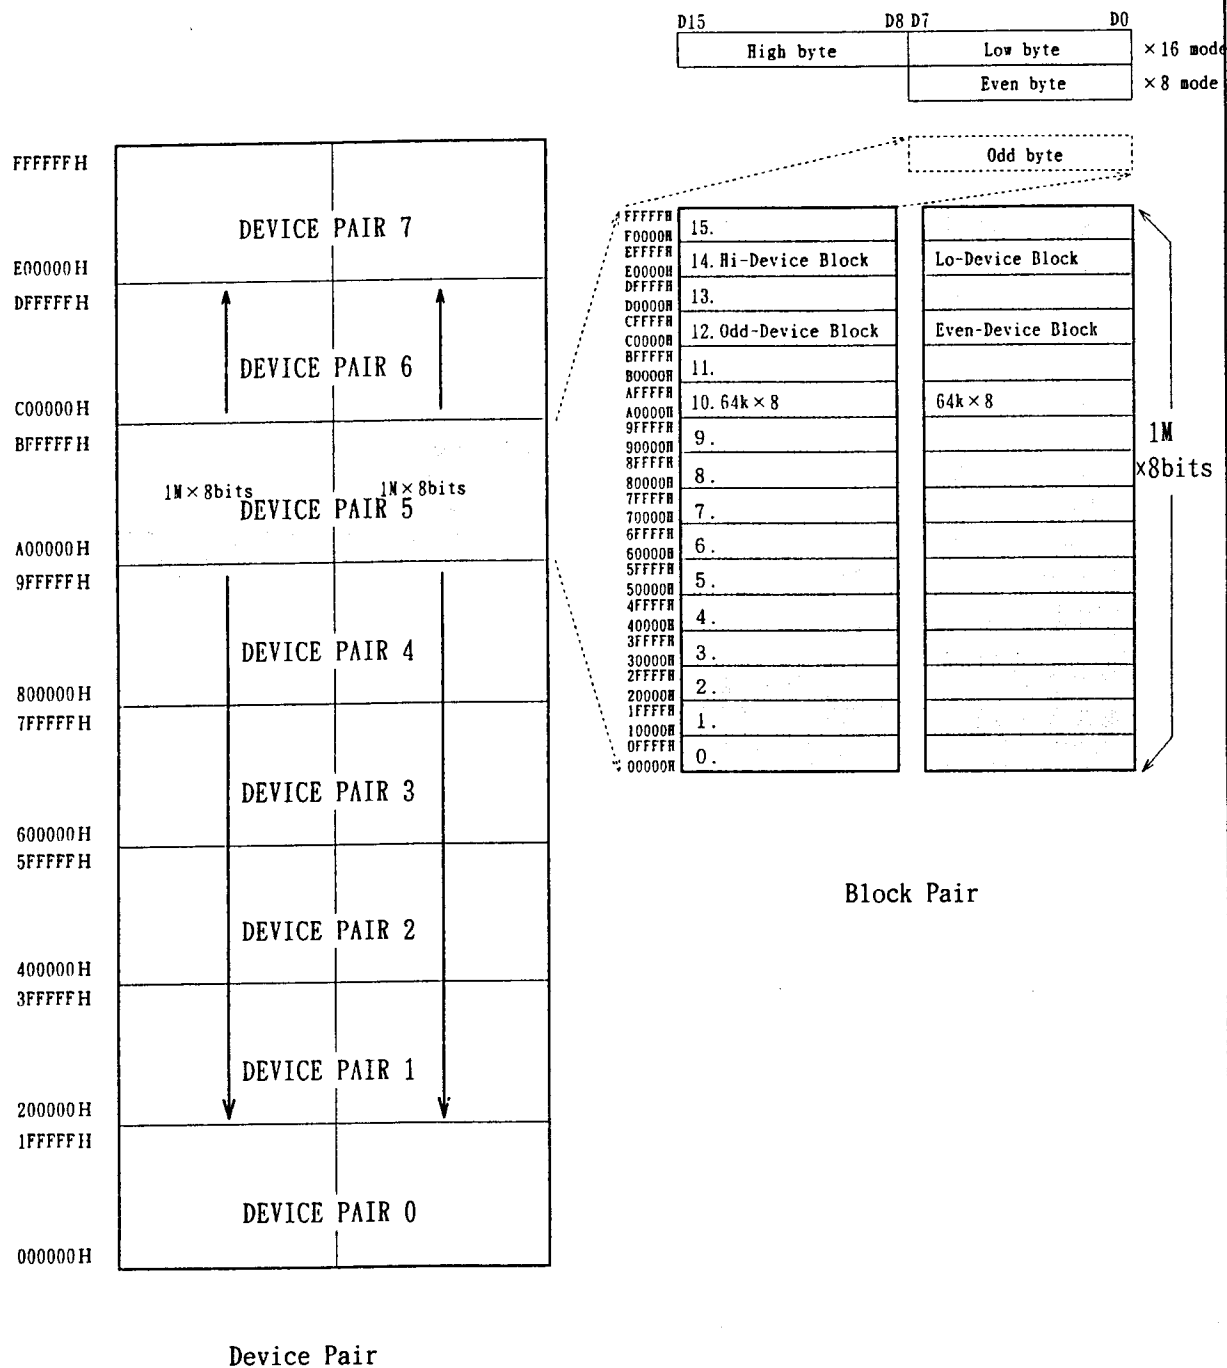

5.2 Function Table

$\overline{CE1}$	$\overline{CE2}$	A0	$\overline{WE}$	$\overline{OE}$	$\overline{REG}$	VppL	Vpp2	Vcc	Operation	D0-D7	D8-D15	Status
H	H	×	×	×	H	VppL	VppL	Vcc		Hi-Z	Hi-Z	Standby
L	H	L	H	L	H	VppL	VppL	Vcc	Read(x8)	Do(Even)	Hi-Z	Byte
L	H	H	H	L	H	VppL	VppL	Vcc	Read(x8)	Do(Odd))	Hi-Z	Byte
L	L	×	H	L	H	VppL	VppL	Vcc	Read(x16)	Do(Even)	Do(Odd)	Word
H	L	×	H	L	H	VppL	VppL	Vcc	Read(x8)	Hi-Z	Do(Odd)	Byte
L	×	×	×	H	H	VppL	VppL	Vcc	Output Disable	Hi-Z	Hi-Z	Byte
H	L	×	×	H	H	VppL	VppL	Vcc	Output Disable	Hi-Z	Hi-Z	Byte
L	H	L	L	H	H	VppH	VppX	Vcc	Program(x8)	Di(Even)	Don't care	Byte
L	H	H	L	H	H	VppX	VppH	Vcc	Program(x8)	Di(Odd)	Don't care	Byte
L	L	×	L	H	H	VppH	VppH	Vcc	Program(x16)	Di(Even)	Di(Odd)	Word
H	L	×	L	H	H	VppX	VppH	Vcc	Program(x8)	Don't care	Di(Odd)	Byte
L	H	L	H	L	H	VppH	VppX	Vcc	Verify(x8)	Do(Even)	Hi-Z	Byte
L	H	H	H	L	H	VppX	VppH	Vcc	Verify(x8)	Do(Odd)	Hi-Z	Byte
L	L	×	H	L	H	VppH	VppH	Vcc	Verify(x16)	Do(Even)	Do(Odd)	Word
H	L	×	H	L	H	VppX	VppH	Vcc	Verify(x8)	Hi-Z	Do(Odd)	Byte
L	H	H	L	L	H	VppH	VppX	Vcc	*1 Prohibited	——	——	——
L	H	L	L	L	H	VppX	VppH	Vcc	*1 Prohibited	——	——	——
L	L	×	L	L	H	VppH	VppH	Vcc	*1 Prohibited	——	——	——
H	L	×	L	L	H	VppX	VppH	Vcc	*1 Prohibited	——	——	——

*1. Do not use this mode as it will result in write errors.

H : High L : Low × : Don't care
 Di : Input Data Do : Output Data Hi-Z : High Impedance
 Vcc : 4.5 ~ 5.5 V VppL : 0.0 ~ 1.5 V VppH : 4.5 ~ 5.5 V / 11.4 ~ 12.6 V
 VppX : VppL or VppH

Caution: When the write protect switch is in protect-mode, the WP signal is "HIGH" and write operation are not allowed.

5.3 Software Command(8/16 Bits Operation ()):16 Bits Operation)

Command	Bus Cycles	First Bus Cycle			Second Bus Cycle			
		Operation	Address	Data	Operation	Address	Data Input	Data Output
Read Array /Reset	1	Write	R A	FFH / (FFFFH)	—	—	—	—
Read Intelligent Identifier	3	Write	D A	90H / (9090H)	Read	I A	—	I I D
Read Status Register	2	Write	D A	70H / (7070H)	Read	D A	—	S R D
Clear Status Register	1	Write	D A	50H / (5050H)	—	—	—	—
Erase Setup /Erase Confirm	2	Write	B A	20H / (2020H)	Write	B A	D0H / (D0D0H)	—
Erase Suspend /Erase Resume	2	Write	B A	B0H / (B0B0H)	Write	B A	D0H / (D0D0H)	—
Byte Write Setup/Write	2	Write	W A	40H / (4040H)	Write	W A	W D	—
Alternate Byte Write Setup/Write	2	Write	W A	10H / (1010H)	Write	W A	W D	—

- Note) 1. This Table shows the basic form of Erase, Verify and Program Verify.
Refer Programming Flowchart, Erase Algorithm in detail.
2. Bus operations are defined in function table in page.
3. I A : Device Identifier Address I I D : Device Identifier Data

	D A	I A			I I D	
		8Bits (Even Device)	8Bits (Odd Device)	16Bits	Byte (8Bits)	Word (16Bits)
Manufacturer Code	000000H~1FFFFFFH	000000H	000001H	000000H	89H	8989H
Device Code	000000H~1FFFFFFH	000002H	000003H	000001H	A6H	A6A6H

R A : Read Address W A : Write Address W D : Write Data
D A : Device Address (Any Address in device is acceptable.)
B A : Erase Block Address (Erase Size is 64k Bytes.)
S R D : Status Register Data

4. Either 40H(4040H) or 10H(1010H) are recognized by the WSM as the Byte Write Setup Command.

a) Read Array/Reset Command:(FFH/FFFFH)

By writing this command, device/devices pair become read mode. The device remains enable for reads until the Command User Interface contents are altered.

b) Intelligent Identifier Command:(90H/9090H):

After writing this command into the Command User Interface, a read cycle retrieves the manufacturer Code and device Code. To terminate the Operation, it is necessary to write another valid command into the register.

c) Read Status Register Command:(70H/7070H):

By Writing this command, the Status Register may be read at any time to determine when a byte or block erase operation is complete, and whether that operation completed successfully. Refer to Status Register definition in page. 9. After writing this command, all subsequent read operations output data from the Status Register, until another valid command is written to the Command User Interface.

d) Clear Status Register Command:(50H/5050H)

Status bits which show error, the Erase Status(SR. 5), Byte Write Status(SR. 4) bits and the Vpp Status bit(SR. 3) can be reset by the Clear Status Machine Register Command.

e) Erase Setup/Erase Command:(20H/2020H)/(D0H/D0D0H):

Erase is executed one block(64kB for 1 device, 128kB for 2 devices) at a time.

This command is functional when Vpp=VppH and an Erase Setup Command is first written to the Command User Interface, followed by the Erase Confirm Command. After that, the device automatically outputs Status Register data when read. The CPU can detect the completion of the erase event by analyzing the output of the RDY/BSY pin, or the WSM Status bit of the Status Register. When erase is completed, the Erase Status bit should be checked.

If erase error is detected, the Status Register should be cleared.

f) Erase Suspend/Erase Resume Command:(B0H/B0B0H)/(D0H/D0D0H)

The Erase Suspend command allows block erase interruption in order to read data from another block of memory. The device continues to output Status Register data when read, after the Erase Suspend Command is written. Polling the WSM Status and Erase Suspend Status bits will determine when the erase operation has been suspended. RDY/BSY pin will also transition to V_{OH}. At this point, a Read Array Command can be written to the Command User Interface to read data from blocks other than that which is suspended. Vpp must remain at VppH while device is in Erase Suspend. Erase Resume Command, at which time the WSM will continue with the erase process. The Erase Suspend Status and WSM Status bits of the Status Register will be automatically cleared and RDY/BSY pin will return to V_{OL}. After the Erase Resume is written, the device automatically output Status Register data when read.

g) Byte Write Setup/Write Command:(40H/4040H) or (10H/1010H)

This command is functional when Vpp=VppH and an Byte Write Setup Command is first written to the Command User Interface, followed by a second write specifying the address and data to be written. The WSM then take over, controlling the byte write and write verify algorithms internally. After the two command byte sequence is written to it, the device automatically outputs Status Register data when read. The CPU can detect the completion of the byte write event by analyzing the output of the RDY/BSY pin, or the WSM Status bits of the Status Register.

5.4 Status Register

The memory devices in this card have Status Register which shows state of the device.

Byte Access x8 Bits


bit7	bit6	bit5	bit4	bit3	bit2	bit1	bit0
SR. 7	SR. 6	SR. 5	SR. 4	SR. 3	SR. 2	SR. 1	SR. 0
W S M S	E S S	E S	B W S	V P P S	R F U	R F U	R F U

Register	Contents
SR. 7=Write State Machine Status 1=Ready 0=Busy	When set "1"s, read, erase, data write is acceptable.
SR. 6=Erase Suspend Status 1=Erase Suspend 0=Erase In Progress/Completed	Check whether Erase Suspend Command is executed or not.
SR. 5=Erase Status 1=Error In Block Erase 0=Successful Block Erase	Set "1"s when fail to Erase. Reset by the Clear Status Register Command.
SR. 4=Byte Write Status 1=Error In Byte Write 0=Successful Byte Write	Set "1"s when fail to Byte write. Reset by the Clear Status Register Command.
SR. 3=Vpp Status 1=Vpp Low Detect;Operation Abort 0=Vpp OK	Set "1"s when Vpp, which is needed in Byte Write or Erase operation, is below VppH. Reset by the Clear Status Register Command.
SR. 2~SR. 0=Reserved for Future Use	

Word Access x16 bits

bit15						bit8		bit7		bit0							
SR. 15	SR. 14	SR. 13	SR. 12	SR. 11	SR. 10	SR. 9	SR. 8	SR. 7	SR. 6	SR. 5	SR. 4	SR. 3	SR. 2	SR. 1	SR. 0		
Odd Byte device								Even Byte device									


5.5 Programming Flowchart (Byte Mode)

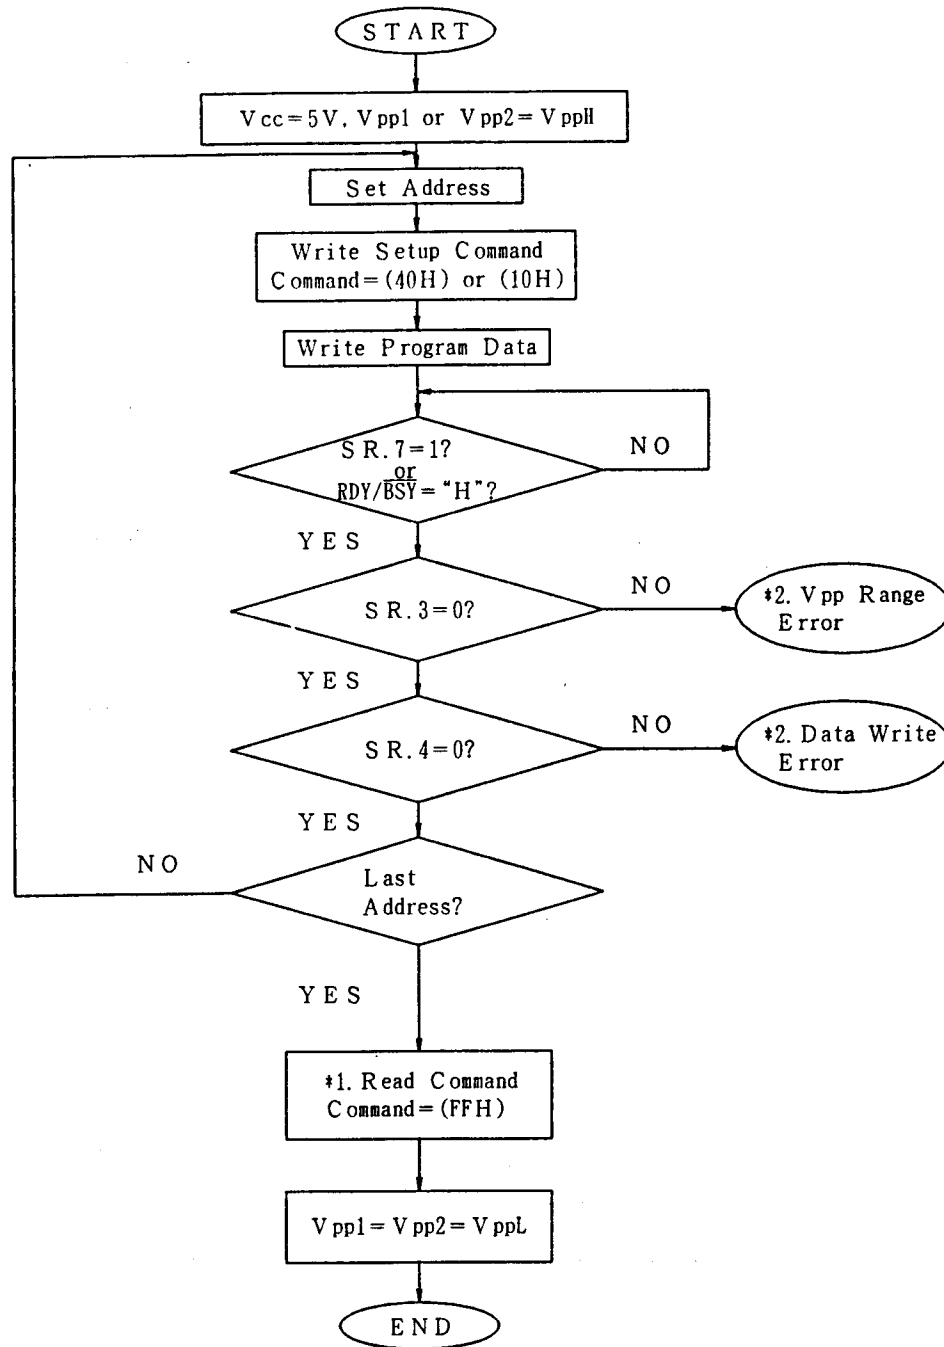

Note) *1. Write FFH after the last block write operation to reset the device to Read Array Mode.

*2. If error is detected, clear the Status Register before attempting retry or other error recovery.


5.6 Erase Algorithm (Byte Mode)

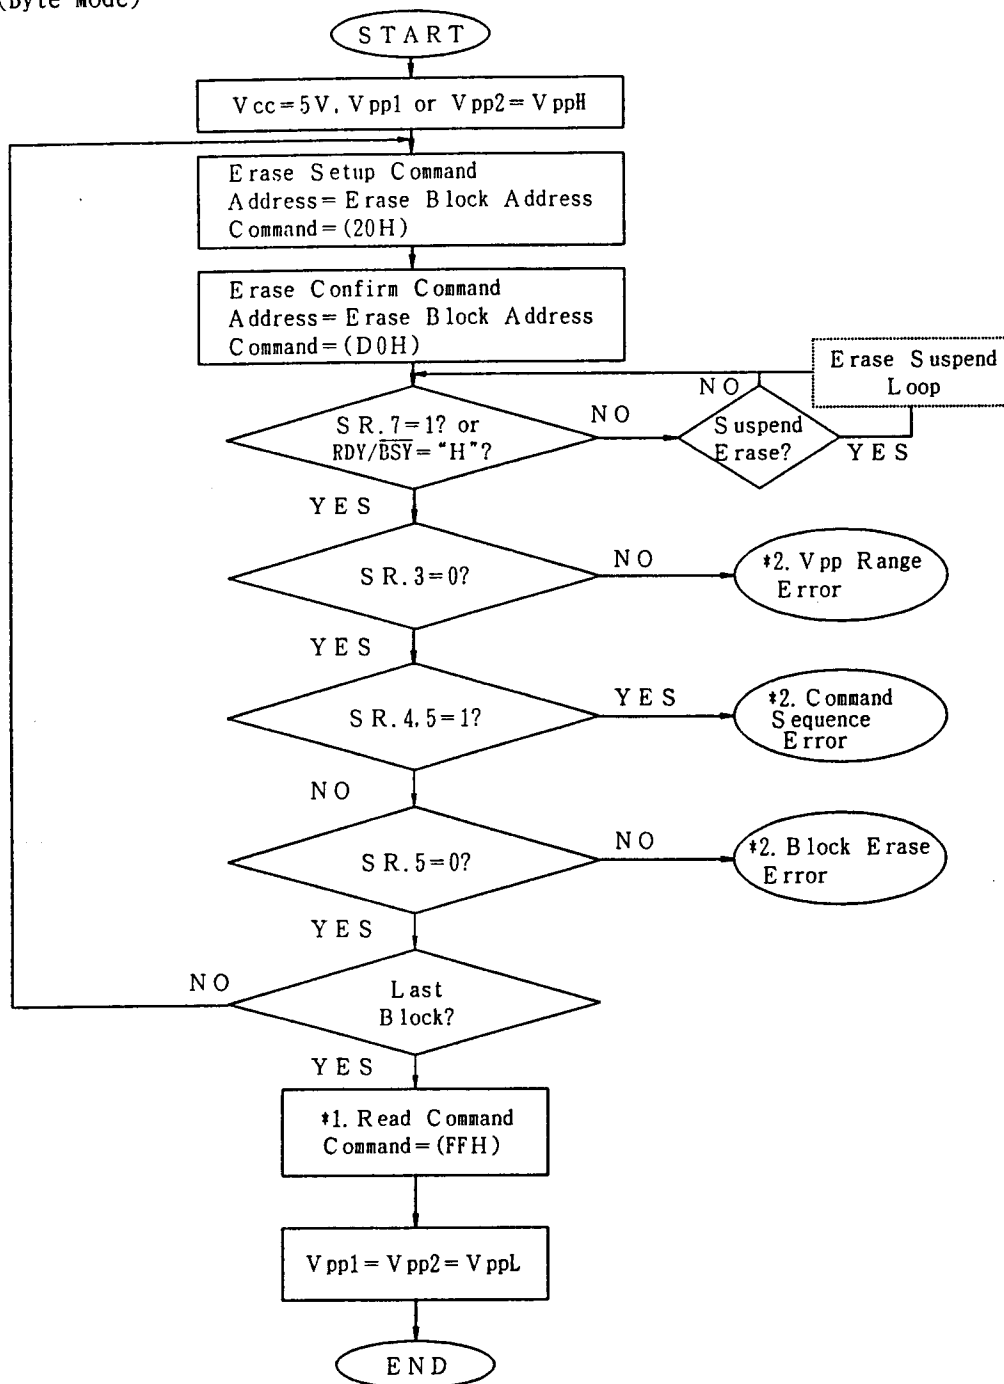

Note) *1. Write FFH after the last block erase operation to reset the device to Read Array Mode.

*2. If error is detected, clear the Status Register before attempting retry or other error recovery.

Erase Algorithm (Word Mode)

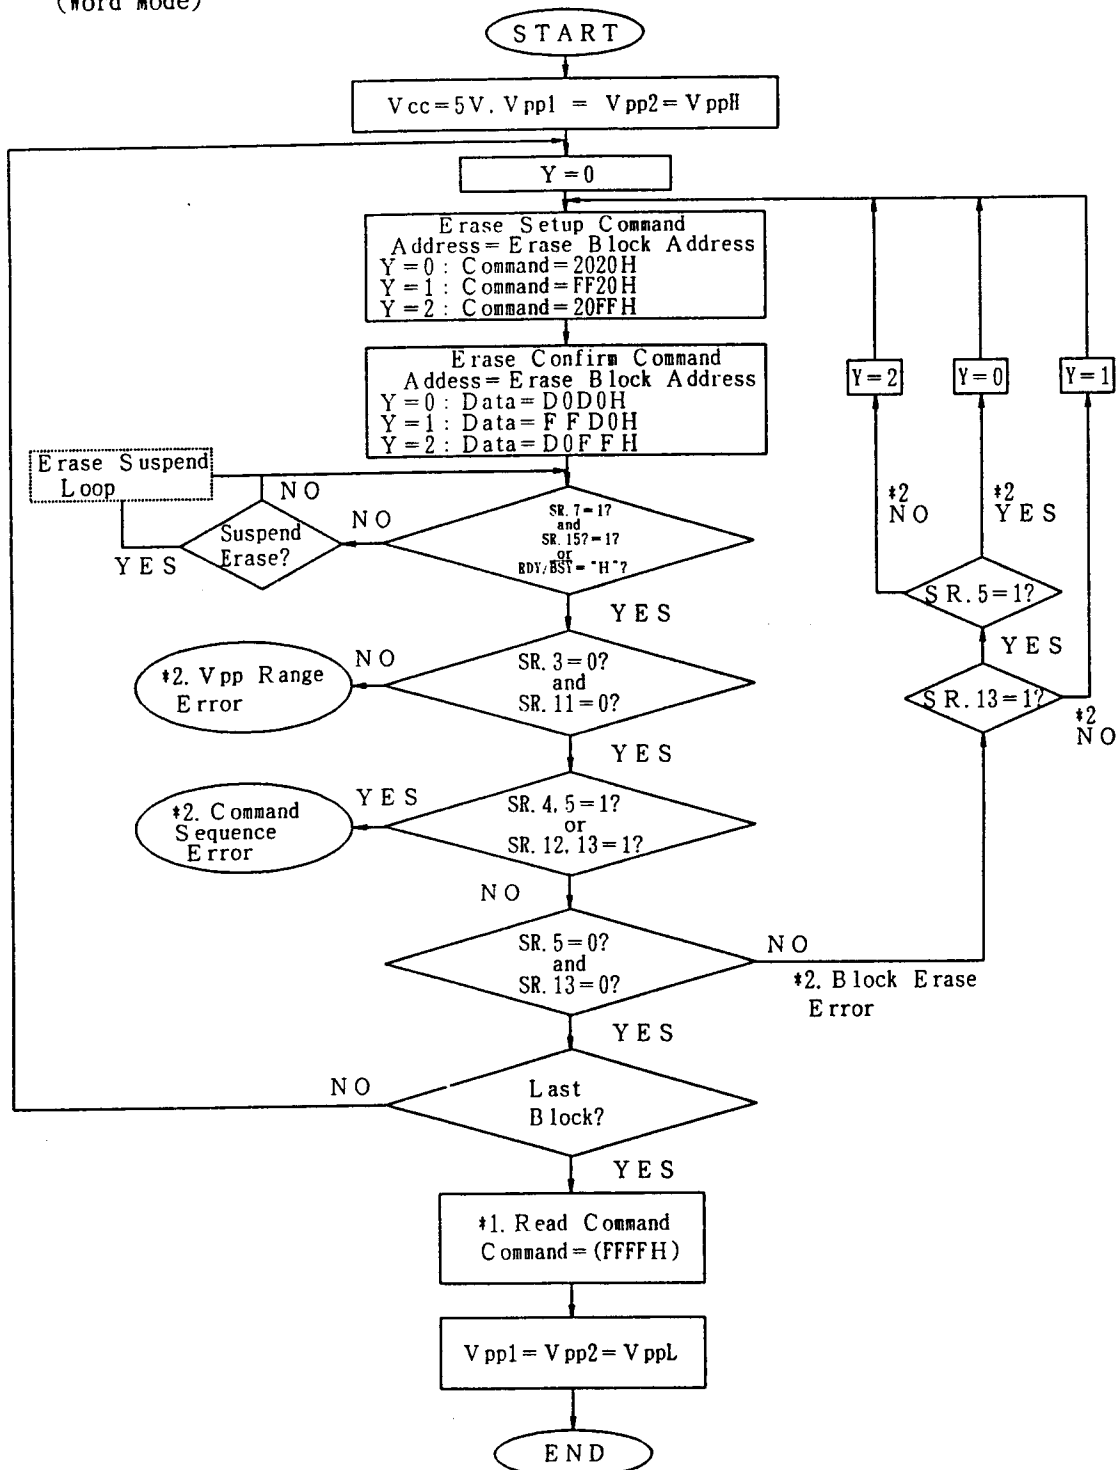

Note) *1. Write FFFFH after the last block erase operation to reset the device to Read Array Mode.

*2. If error is detected, clear the Status Register before attempting retry or other error recovery.

6. Absolute Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{CC}	-0.3 to 7.0	V
Input Voltage	V_{IN}	-0.3 to $V_{CC}+0.3$ (Max:7.0)	V
Output Voltage	V_{OUT}	-0.3 to $V_{CC}+0.3$ (Max:7.0)	V
Operating Temperature	T_{OPR}	0 to +60	°C
Storage Temperature	T_{STG}	-20 to +65	°C

7. Recommended Operating Conditions

PARAMETER	SYMBOL	MINIMUM	MAXIMUM	UNIT
Operating Temperature	T_{OPR}	0	+60	°C
Supply Voltage	V_{CC}	4.5	5.5	V
Input Voltage High	V_{IH}	3.5	$V_{CC}+0.3$	V
Input Voltage Low	V_{IL}	-0.3	1.5	V

8. Capacitance

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITION
Input Capacitance	C_{IN}	—	17	—	pF	$V_{CC}=5V\pm10\%$ $f=1MHz, T_a=25^\circ C$
Input/Output Capacitance	C_{IO}	—	17	—	pF	

9. Read Operation

9.1 D C Characteristics

(Vcc=4.5~5.5V, Ta=0~60°C)

	PARAMETER		SYMBOL	MIN	TYP	MAX	UNIT	CONDITION
1	Operating Voltage	High Temperature	V _{CC}	4.50	—	5.50	V	
		Low Temperature						
*1 2	Current Consumption	Static Operatin Current	I _{SB}	—	—	2.0	mA	X16, Address : PingPong
		Dynamic Operating Current	I _{CC}	—	—	80		
3	Input Voltage	Input Voltage Level High	V _{IH}	3.5	—	V _{CC} +0.3	V	V _{CC} =4.5~5.5V
		Input Voltage Level Low	V _{IL}	-0.3	—	1.5		
4	Input Current	A0~A20, D0~D15	I _{LI}	-10	—	70	μA	V _I =V _{CC} , 0V
		CE1, CE2, OE, WE, REG		-70	—	10		
5	Output Voltage	High	V _{OH}	V _{CC} -0.5	—	—	V	I _{OH} =-2mA(*2) I _{OH} =-4μA(*3)
		Low	V _{OL}	—	—	0.4		I _{OL} =4mA

PingPong: Scan the target address, with accessing the target and another address alternately.

*1 (1) Static Operating Current: With the memory card's voltage at 5.5V and the CE1, CE2 OE, WE and REG signals "HIGH" (V_{IH}=V_{CC}-0.2V), A0 signal "LOW" (V_{IL}≤0.2V) the current consumption is measured with the output open.

(2) Dynamic Operating Current: With the memory card's V_{CC} at 5.5V and V_{pp1}=V_{pp2} at 12.6V, current consumption during access is measured with the output open.

(Access time: 200ns) The current depends on addressing.

*2 D0~D15

*3 BVD1, BVD2, RDY/BSY, WP

9.2 A C Characteristics (Vcc=4.5~5.5V, Vpp=0.0~1.5V, Ta=0~60°C)

Testing Conditions:

- | | | |
|--|---|---|
| 1) Input Pulse Level | : | 0.8~3.5V |
| 2) Input Rise/Fall Time | : | 10ns |
| 3) Input/Output Timing Reference Level | : | 1.5V |
| 4) Output Load | : | 1TTL+C _L (100pF) (including scope and jig capacitance) |


9.2.1 Read Cycle

(Vcc=4.5~5.5V, Vpp=0.0~1.5V, Ta=0~60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL (PCMCIA)			
Read Cycle Time	t _{AVAV}	t _{CR}	200	—	ns
Address Access Time	t _{AVQV}	t _A (A)	—	200	
Card Enable Access Time	t _{ELQV}	t _A (CE)	—	200	
Output Enable Access Time	t _{GLQV}	t _A (OE)	—	100	
Output Disable Time from CE*	t _{EHQV}	t _{dis} (CE)	—	90	
Output Disable Time from OE*	t _{GHQZ}	t _{dis} (OE)	—	90	
Output Enable Time from CE	t _{ELQX}	t _{en} (CE)	5	—	
Output Enable Time from OE	t _{GLQX}	t _{en} (OE)	5	—	
Data Valid from Add Change		t _V (A)	0	—	


*Time until output becomes floating. (The output voltage is not defined.)

○ Read CYCLE(1) ($\overline{CE2} = V_{IH}$ Fixed), 8 Bits Output

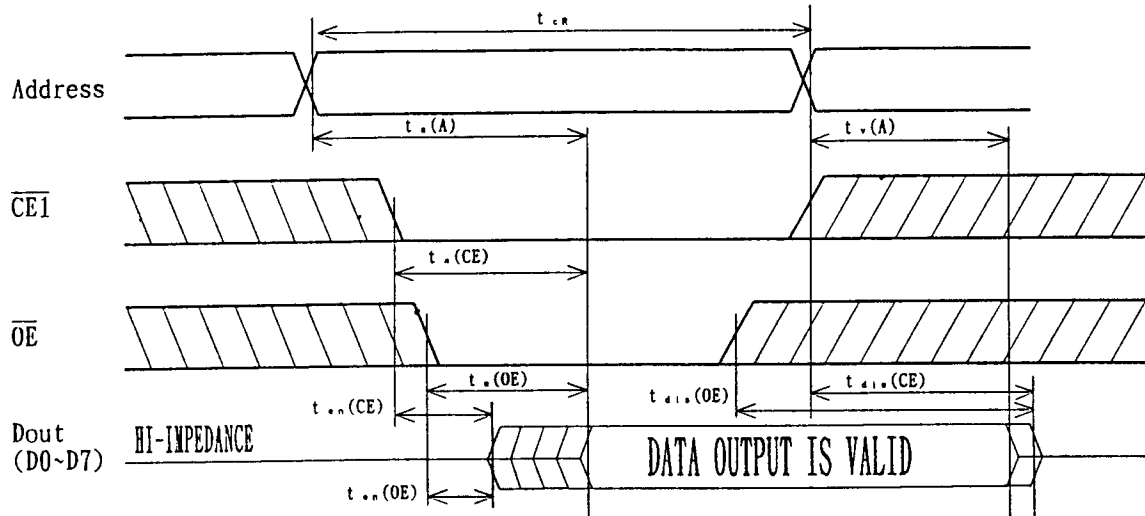


- Note) 1. $\overline{WE}$ ="HIGH", during a read cycle.
 2. Either "HIGH" or "LOW" in diagonal areas.
 3. The output data becomes valid when last interval, t_{AA} , t_{AC} or t_{OE} have concluded.

○ Read Cycle(2) ($\overline{CE1} = V_{IH}$ Fixed), 8 Bits Output

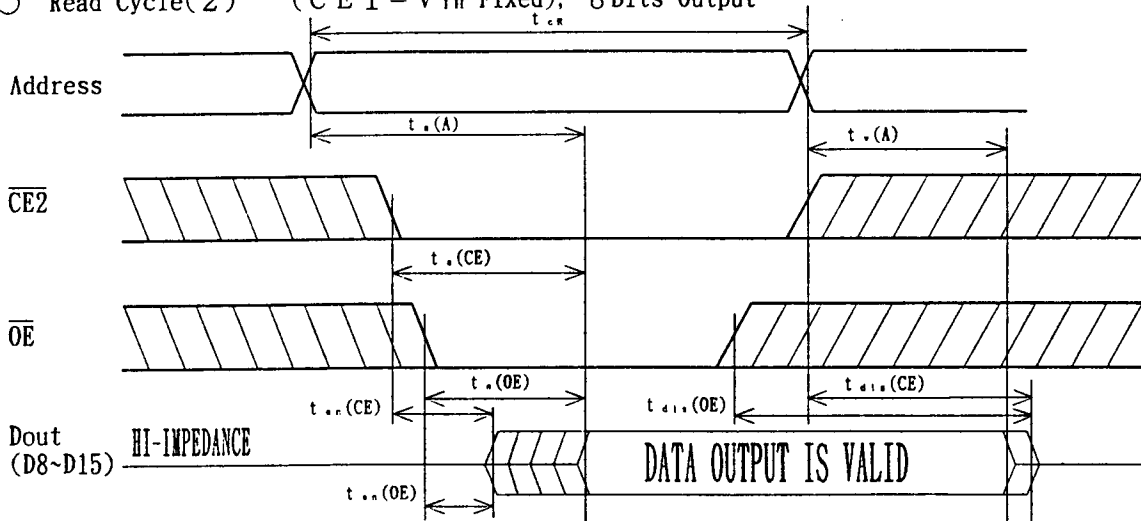

- Note) 1. $\overline{WE}$ ="HIGH", during a read cycle.
 2. Either "HIGH" or "LOW" in diagonal areas.
 3. The output data becomes valid when last interval, t_{AA} , t_{AC} or t_{OE} have concluded.

○ Read Cycle (3), 16 Bits Output

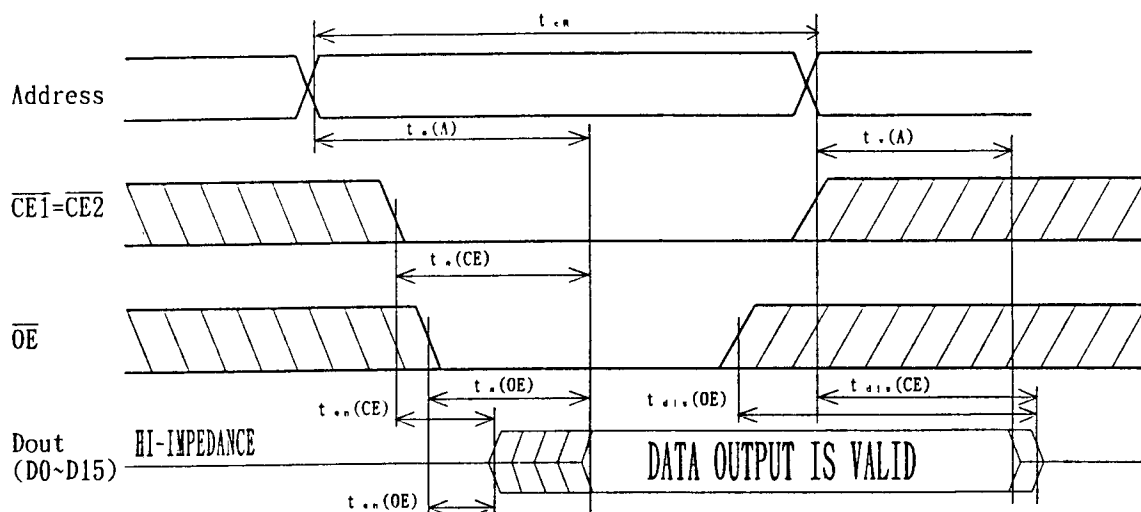

- Note) 1. $\overline{WE}$ ="HIGH", during a read cycle.
 2. Either "HIGH" or "LOW" in diagonal areas.
 3. Change CE1 and CE2 at the same time.
 4. The output data becomes valid when last interval, $t_{A(A)}$, $t_{A(CE)}$ or $t_{A(OE)}$ have concluded.

10. Programming Operation

10.1 D C Characteristics

(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER		SYMBOL	MIN	MAX	UNIT	CONDITION
Vpp1, Vpp2 operating Voltage	Read	V _{PPL}	0	1.5	V	
	Program	V _{PPH}	4.5	5.5		Vpp=4.5~5.5V
			11.4	12.6		Vpp=11.4~12.6V
Vpp1, Vpp2 operating Current (X16 Mode)	Read	I _{SB2}	—	1.6	mA	Input open
	Program	I _{PP}	—	45		RMS Vpp=4.5~5.5V
			—	20		Vpp=11.4~12.6V
Vcc operating Current	Standby	I _{SB1}	—	2		Input open
	Program	I _{CC}	—	75		RMS X16 Mode
Input Voltage		V _{IL}	-0.3	1.5	V	
		V _{IH}	3.5	V _{CC} +0.3		
Output Voltage		V _{OL}	—	0.4		I _{OL} =4mA
During Verify		V _{OH}	V _{CC} -0.5	—		I _{OH} =-2mA

- Note) 1. Power on Vcc before power on Vpp, power off Vcc after power off Vpp.
 2. Keep Vpp including its overshoot, below 13V.
 3. Card insertion or removal while applying Vpp=12V may cause a loss of integrity.
 4. Do not turn on or turn off during $\overline{CE}$ ="LOW".
 5. If V_{IH} goes above V_{CC}+0.3V, normal operation is not assured.

10.2 A C Characteristics (Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

Testing Conditions:

- | | |
|--|--|
| 1) Input Pulse Level | : 0.8~3.5V |
| 2) Input Rise/Fall Time | : 10ns |
| 3) Input/Output Timing Reference Level | : 1.5V |
| 4) Output Load | : 1TTL+Cl(100pF) (including scope and jig capacitance) |

10.2.1 Program Cycle

$\overline{WE}$ Controlled (Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t_{AVAV}	t_{cw}	200	—	n s
Address Setup Time	t_{AVWL}	$t_{su}(A)$	20	—	
Write Recovery Time	t_{WHAX}	$t_{rec}(\overline{WE})$	30	—	
Data Setup Time for $\overline{WE}$	t_{DVWH}	$t_{su}(D-\overline{WE}H)$	60	—	
Data Hold Time	t_{WHDX}	$t_h(D)$	30	—	
Write Recovery Before Read	t_{WHGL}		10	—	
Card Enable Setup time for $\overline{WE}$	t_{ELWH}	$t_{su}(CE-\overline{WE}H)$	140	—	
Address Setup for $\overline{WE}$	t_{AVWH}	$t_{su}(A-\overline{WE}H)$	140	—	
Card Enable Hold Time	t_{WHEH}		15	—	
Write Pulse Width	t_{WLWH}	$t_w(\overline{WE})$	120	—	
Write Pulse Width High	t_{WHWL}	$t_w(\overline{WE}H)$	30	—	
$\overline{WE}$ High to RDY/BSY Going Low	t_{WHRL}		—	150	
Duration of write operation	Vpp=4.5~5.5V Vpp=11.4~12.6V	t_{WHQVI}	6.5	—	μs
			4.8	—	
Vpp Setup to $\overline{WE}$ Going High	t_{VPWH}		100	—	n s
Vpp Hold from Valid SRD, RDY/BSY High	t_{QVVL}		0	—	


$\overline{CE}$ Controlled


(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t_{AVAV}	t_{cw}	200	—	n s
Address Setup Time	t_{AVEL}	$t_{su}(A)$	20	—	
Write Recovery Time	t_{EHAX}	$t_{rec}(\overline{CE})$	30	—	
Data Setup Time for $\overline{CE}$	t_{DVEH}	$t_{su}(D-\overline{CE}H)$	60	—	
Data Hold Time	t_{EHDX}	$t_h(D)$	30	—	
Write Recovery Before Read	t_{EHGL}		10	—	
Write Enable Setup time for $\overline{CE}$	t_{WLEH}	$t_{su}(\overline{WE}-\overline{CE}H)$	140	—	
Address Setup for $\overline{CE}$	t_{AVEH}	$t_{su}(A-\overline{CE}H)$	140	—	
Write Enable Hold Time	t_{EHWH}		0	—	
Write Pulse Width	t_{ELEH}	$t_w(\overline{CE})$	120	—	
Write Pulse Width High	t_{EHEL}	$t_w(\overline{CE}H)$	30	—	
$\overline{WE}$ High to RDY/BSY Going Low	t_{EHRL}		—	150	
Duration of write operation	Vpp=4.5~5.5V Vpp=11.4~12.6V	t_{EHQVI}	6.5	—	μs
			4.8	—	
Vpp Setup to $\overline{WE}$ Going High	t_{VPEH}		100	—	n s
Vpp Hold from Valid SRD, RDY/BSY High	t_{QVVL}		0	—	

1. Set $\overline{CE}1, \overline{CE}2, \overline{OE}$ and $\overline{WE}$ "HIGH", when Vpp changes from VppL to VppH or vice versa.

Note) While the data signal is in output mode, do not apply an opposite phase signal.

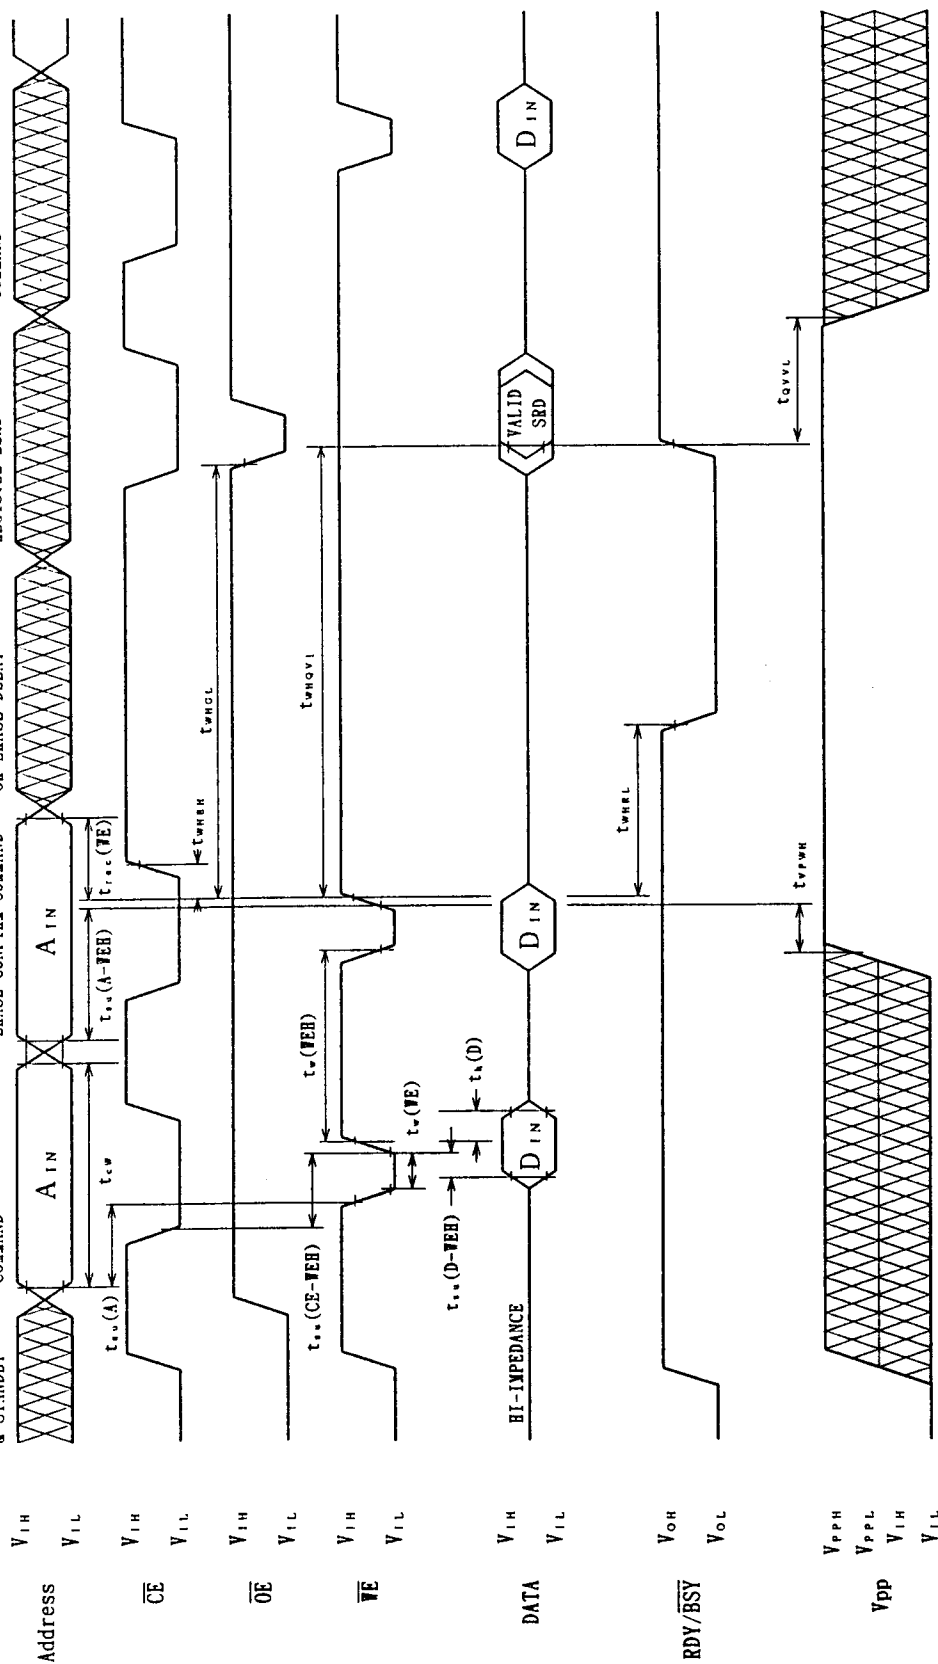

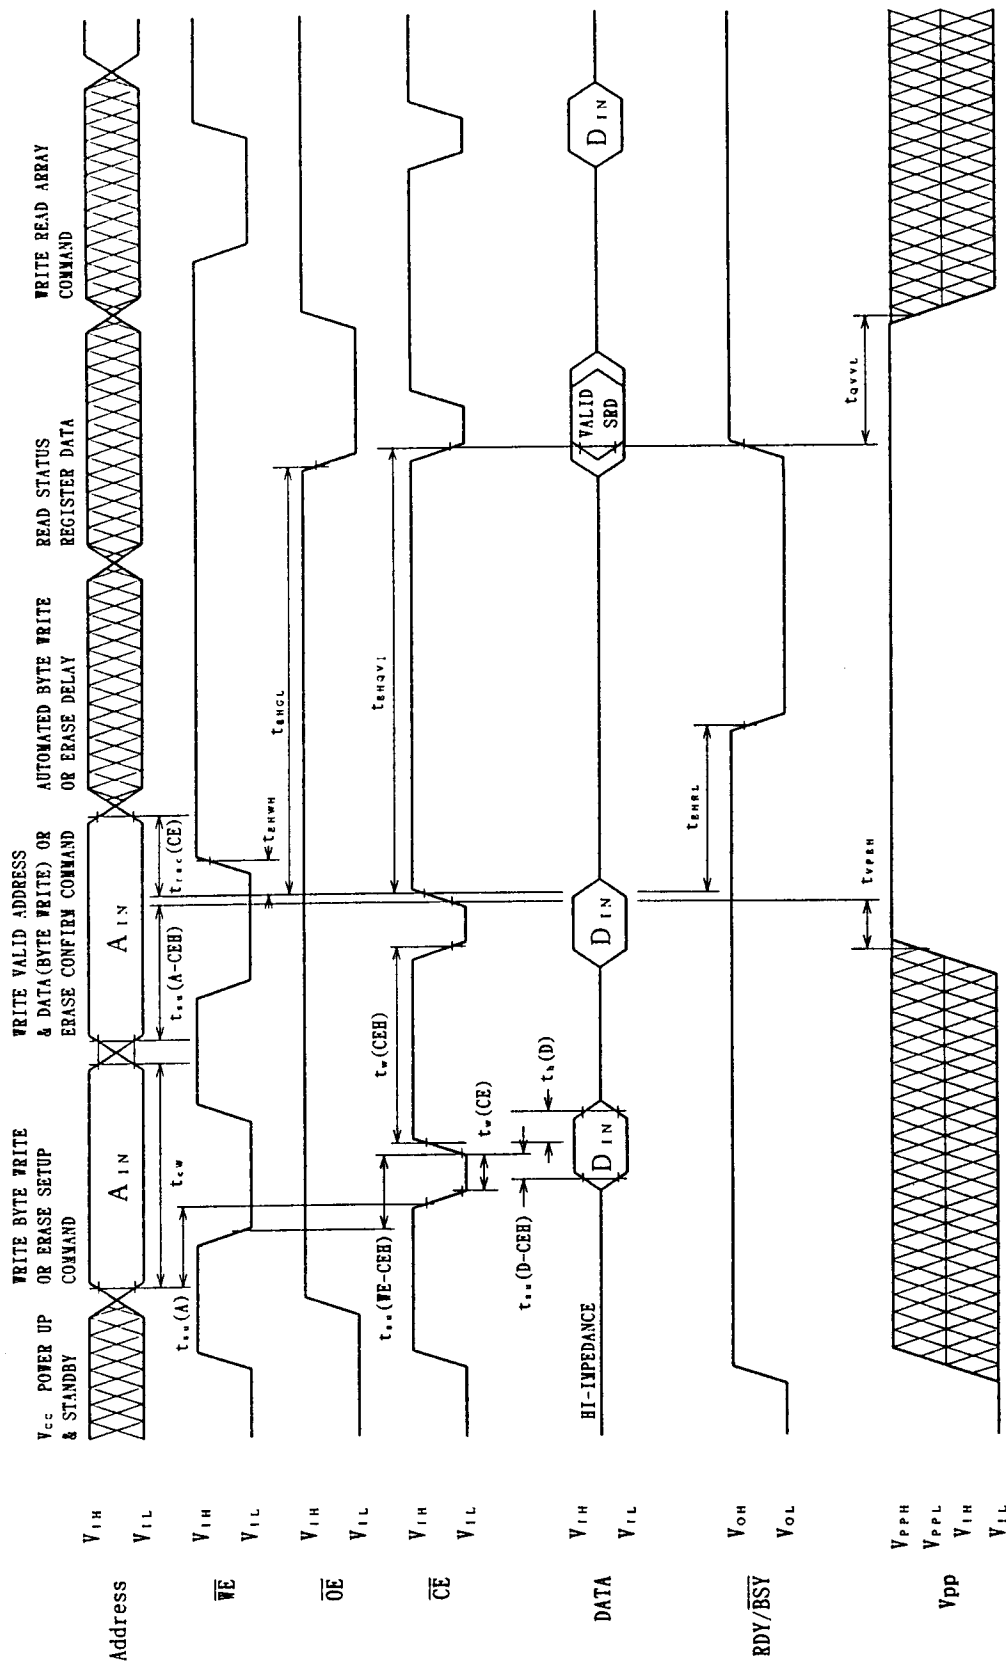WRITE BYTE 7RITE
WRITE VALID ADDRESS

Note) While the data signal is in output mode, do not apply an opposite phase input signal.

11. Erase Operation

11.1 D C Characteristics

(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER	SYMBOL	MIN	MAX	UNIT	CONDITION
Vpp1, Vpp2 Operating Voltage	Read	V _{PPL}	0	1.5	V
	Program	V _{PPHE}	4.5	5.5	
			11.4	12.6	
Vpp1, Vpp2 Operating Current (X16 Mode)	Standby	I _{SB2}	—	1.6	m A
	Erase	I _{PP}	—	45	
			—	20	
	Erase Suspend	I _{PPS}	—	1.6	
Vcc Operating Current (X16 Mode)	Standby	I _{SB1}	—	2.0	V
	Erase	I _{CCE}	—	75	
	Erase Suspend	I _{CCEs}	—	22	
Input Voltage		V _{IL}	-0.3	1.5	V
		V _{IH}	3.5	V _{CC} +0.3	
Output Voltage During Verify		V _{OL}	—	0.4	V
		V _{OH}	V _{CC} -0.5	—	

Note) Power on Vcc before power on Vpp, power off Vcc after power off Vpp. Keep Vpp including its overshoot, below 13V. Card insertion or removal while applying Vpp=12V may cause a loss of integrity. Do not turn on or turn off during CE="LOW". If V_{IH} goes above V_{CC}+0.3V, normal operation is not assured.

11.2 A C Characteristics (Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

Testing Conditions:

- 1) Input Pulse Level : 0.8~3.5V
- 2) Input Rise/Fall Time : 10ns
- 3) Input/Output Timing Reference Level : 1.5V
- 4) Output Load : 1TTL+C_L(100pF) (including scope and jig capacitance)

11.2.1 Erase Cycle

WE Controlled

(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t _{AVAV}	t _{cw}	200	—	n s
Address Setup Time	t _{AVWL}	t _{su} (A)	20	—	
Write Recovery Time	t _{WHAX}	t _{rec} (WE)	30	—	
Data Setup Time for WE	t _{DVWH}	t _{su} (D-WEH)	60	—	
Data Hold Time	t _{WHDX}	t _h (D)	30	—	
Write Recovery Before Read	t _{WHGL}		10	—	
Card Enable Setup time for WE	t _{ELWH}	t _{su} (CE-WEH)	140	—	
Address Setup for WE	t _{AVWH}	t _{su} (A-WEH)	140	—	
Card Enable Hold Time	t _{WHEH}		15	—	
Write Pulse Width	t _{WLWH}	t _w (WE)	120	—	
Write Pulse Width High	t _{WHWL}	t _w (WEH)	30	—	
WE High to RDY/BSY Going Low	t _{WHRL}		—	150	
Duration of Erase operation	Vpp=4.5~5.5V	t _{WHQV2}	0.9	—	s
	Vpp=11.4~12.6V		0.3	—	
Vpp Setup to WE Going High	t _{VPWH}		100	—	n s
Vpp Hold from Valid SRD, RDY/BSY High	t _{QVVL}		0	—	

$\overline{CE}$ Controlled

(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)


PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t _{AVAV}	t _{cw}	200	—	n s
Address Setup Time	t _{AVEL}	t _{su} (A)	20	—	
Write Recovery Time	t _{EHAX}	t _{rec} (CE)	30	—	
Data Setup Time for $\overline{CE}$	t _{DVEH}	t _{su} (D-CEH)	60	—	
Data Hold Time	t _{EHDX}	t _h (D)	30	—	
Write Recovery Before Read	t _{ENGL}		10	—	
Write Enable Setup time for CE	t _{WLEH}	t _{su} (WE-CEH)	140	—	
Address Setup for $\overline{CE}$	t _{AVEH}	t _{su} (A-CEH)	140	—	
Write Enable Hold Time	t _{EHWH}		0	—	
Write Pulse Width	t _{ELEH}	t _w (CE)	120	—	
Write Pulse Width High	t _{EHEL}	t _w (CEH)	30	—	
$\overline{WE}$ High to RDY/BSY Going Low	t _{EHRL}		—	150	
Duration of Erase operation	Vpp=4.5~5.5V Vpp=11.4~12.6V	t _{EHQV2}	0.9	—	s
			0.3	—	
Vpp Setup to $\overline{WE}$ Going High	t _{VPEH}		100	—	n s
Vpp Hold from Valid SRD, RDY/BSY High	t _{QVVL}		0	—	

1. Set $\overline{CE1}$, $\overline{CE2}$, $\overline{OE}$ and $\overline{WE}$ "HIGH", when Vpp changes from PPr to PPH or vice versa.

The diagram illustrates the timing relationships for the 28C01 EPROM. The signals and their timing parameters are as follows:

- Address:** V_{IH} , V_{IL} . Timing parameters: $t_{AA}(A)$, t_{CW} , $t_{AA}(A-VEH)$, $t_{RAC}(VE)$.
- $\overline{CE}$:** V_{IH} , V_{IL} . Timing parameters: t_{WHEN} , t_{HCL} .
- $\overline{OE}$:** V_{IH} , V_{IL} . Timing parameters: t_{HCL} , t_{HNVZ} .
- $\overline{WE}$:** V_{IH} , V_{IL} . Timing parameters: t_{WHEN} , t_{HCL} , t_{HNVZ} .
- DATA:** V_{IH} , V_{IL} . Timing parameters: t_{WHEN} , t_{HCL} , t_{HNVZ} .
- $\overline{RDY/BSY}$:** V_{OH} , V_{OL} . Timing parameters: t_{WHEN} , t_{HCL} , t_{HNVZ} .
- V_{PP} :** V_{PPH} , V_{PPL} , V_{IH} , V_{IL} . Timing parameters: t_{WHEN} , t_{HCL} , t_{HNVZ} .

Note) While the data signal is in output mode, do not apply an opposite phase signal.




12. Block Erase and Data Write Characteristics

(Vcc=4.5~5.5V, Vpp=4.5~5.5V/11.4~12.6V, Ta=0~60°C)

PARAMETER		MIN	TYP	MAX	UNIT
Block Pair	Vpp=4.5~5.5V	—	1.1	1.0	s
Erase Time	Vpp=11.4~12.6V	—	1.0	1.0	
Block Pair	Vpp=4.5~5.5V	—	0.5	2.1	
Write Time	Vpp=11.4~12.6V	—	0.4	2.1	

13. Voltage Timing (Ta = 25°C)

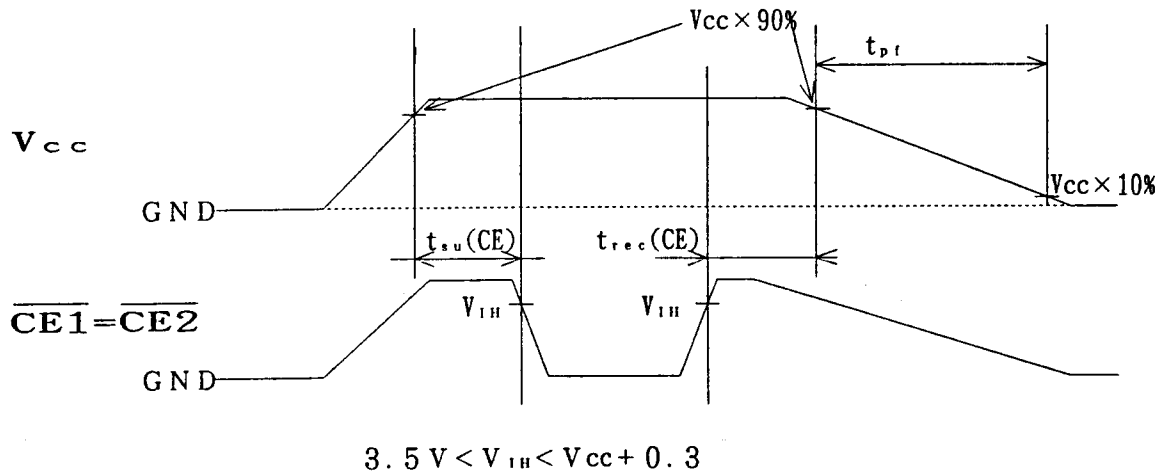

PARAMETER	SYMBOL	MIN	MAX	UNIT
CE Setup Time	$t_{su}(CE)$	4.0	—	ms
CE Recovery Time	$t_{rec}(CE)$	1.0	—	μs
Vcc Falling Time	t_{fi}	3.0	300	ms

Note)

- When Vcc(4.5~5.5V) is applied to the memory card and you are inserting or removing the card, CE1, CE2 should both be high-impedance. At such a time, other signal line should also be high-impedance. After inserting the memory card, do not access it during the CE setup time (minimum of 4ms). (During this time, neither CE1 nor CE2="LOW".)
- When Vcc is turn on, if the condition (for example, Vcc rising time, etc) is not sufficient to as specified, it is possible that device's Status Register is not cleared or device not becomes to Read Array Mode. To prevent these, it is recommended that using software command, reset the Status Register or set the device to Read Array Mode.

ex.

Reset the Status Register 50H(5050H)

Set to Read Array Mode FFH(FFFFH)

14. Attribute Memory

The attribute memory holds the attribute informations of the card such as the type of card, bit configuration, speed and so on.

EEPROM Model

Card has 2k bytes of EEPROM attribute memory. To read the attribute memory, set REG="LOW" and perform a read with the same access timing as common memory read. For this operation, access time is 300ns maximum. To allow 2k bytes of attribute memory, even addresses from 0 to 4096 are reserved. Since only the even-numbered bytes are used, reading odd-numbered bytes will result in invalid data.

Note) We have another type of attribute memory as follows.

No EEPROM Model. (Model no. ID244K02: 5 bytes device informations in even address 0 to 8, read only in card's control circuit, with the same access timing as common memory read)

14.1 Attribute Memory Read/Write Function Chart

CE1	CE2	AO	WE	OE	REG	MODE	D ₀ ~D ₇	D ₈ ~D ₁₅	STATUS
H	H	X	X	X	X		High-Z	High-Z	Standby
L	H	L	H	L	L	Read (×8)	D ₀ (even byte)	High-Z	Byte Access
L	H	H	H	L	L		High-Z	High-Z	Standby
L	L	X	H	L	L	Read (×8)	D ₀ (even byte)	High-Z	Byte Access
H	L	X	H	L	L		High-Z	High-Z	Standby
L	H	L	L	H	L	Write (×8)	D ₀ (even byte)	xxx	Byte Access
L	H	H	L	H	L		xxx	xxx	Standby
L	L	X	L	H	L	Write (×8)	D ₀ (even byte)	xxx	Byte Access
H	L	X	L	H	L		xxx	xxx	Standby
L	X	X	H	L	L	Attribute Memory Address 0~8	D ₀	High-Z	Byte Access

H : High

L : Low

X : High/Low not applicable

D_i :

D_o :

High-Z :

xxx :

Input Data

Output Data

High Impedance

Don't Care

Notes:

- 1) When the write protect switch is in protect-mode, the WP output signal is "HIGH" and write operations (including attribute memory) are not allowed.
- 2) A0-A11 are attribute memory addresses. Addresses after A12 are not decoded, so care should be taken.

14.2 AC Characteristics (VCC=4.5V~5.5V, Ta=0~60°C)

Testing Conditions


- 1) Input Pulse Level : 0.8~3.5V
- 2) Input Rise/Fall Time : 10ns
- 3) Input/Output Timing Reference Level : 1.5V
- 4) Output Load Capacitance : 1TTL+C_L (100pF)
(including scope and jig capacitance)

14.3 Attribute Memory Read Cycle

(V_{CC} = 4.5 ~ 5.5V, T_a = 0 ~ 60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Read Cycle Time	t _{CR}	t _{CR}	300	—	ns
Address Access Time	t _{ACC}	t _a (A)	—	300	
Card Enable Access Time	t _{CE}	t _a (CE)	—	300	
Output Enable Access Time	t _{OE}	t _a (OE)	—	150	
Output Disable Time from $\overline{CE}$		t _{dis} (CE)	—	100	
Output Disable Time from $\overline{OE}$	t _{DF}	t _{dis} (OE)	—	100	
Output Enable Time from $\overline{CE}$		t _{en} (CE)	5	—	
Output Enable Time from $\overline{OE}$		t _{en} (OE)	5	—	
Data Valid from Add Change	t _{OH}	t _v (A)	0	—	

○ Attribute Memory Read Cycle

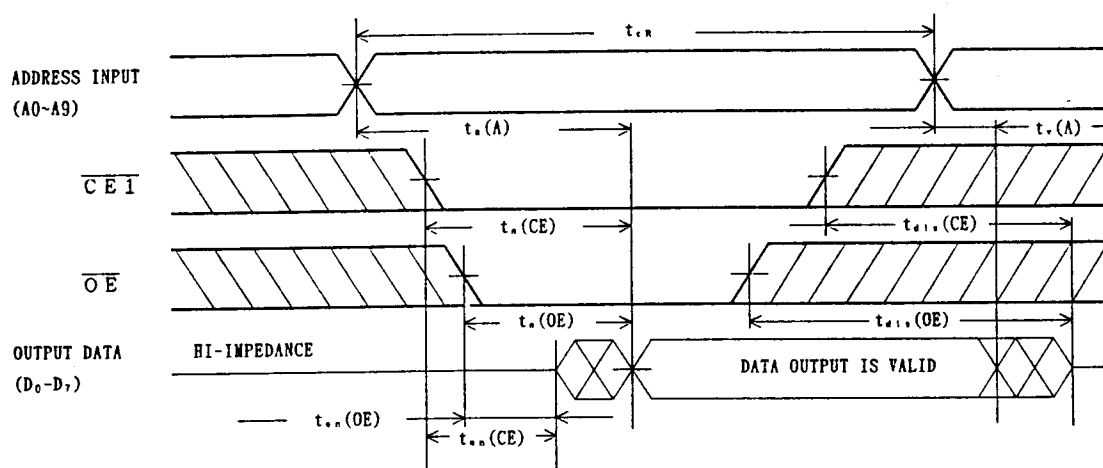

Note: 1. To read attribute memory, $\overline{REG}$ ="LOW", $\overline{WE}$ ="HIGH" and either $\overline{CE2}$ ="LOW" or else $\overline{CE2}$ ="HIGH" and A0="LOW".

2. The output data becomes valid when last interval, t_a(A), t_a(CE) or t_a(OE) have concluded.

14.4 Attribute Memory Write Cycle

WE Controlled



(V_{cc} = 4.5V ~ 5.5V, Ta = 0 ~ 60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t _{wc}	t _{cw}	10	—	m s
Write Pulse Width	t _{wp}	t _w (WE)	180	—	n s
Address Setup Time	t _{as}	t _{su} (A)	10	—	
Data Setup Time for WE	t _{ds}	t _{su} (D-WEH)	100	—	
Crad Enable Setup Time	t _{ces}	t _{su} (CE)	0	—	
Output Enable Setup Time	t _{oes}	t _{su} (OE-WE)	45	—	
Address Hold Time	t _{ah}		260	—	
Write Hold Time	t _{ch}		0	—	
Output Enable Hold Time	t _{oeh}		70	—	
WE HIGH Hold Time	t _{wen}		9.9	—	m s
Data Hold Time	t _{dH}	t _h (D)	80	—	n s

CE Controlled

(V_{cc} = 4.5V ~ 5.5V, Ta = 0 ~ 60°C)

PARAMETER	SYMBOL		MIN	MAX	UNIT
	SYMBOL	SYMBOL(PCMCIA)			
Write Cycle Time	t _{wc}	t _{cw}	10	—	m s
Write Pulse Width	t _{wp}	t _w (CE)	210	—	n s
Address Setup Time	t _{as}	t _{su} (A)	10	—	
Data Setup Time for CE	t _{ds}	t _{su} (D-CEH)	100	—	
Write Enable Setup Time	t _{wes}	t _{su} (WE)	0	—	
Output Enable Setup Time	t _{oes}	t _{su} (OE-CE)	45	—	
Address Hold Time	t _{ah}		260	—	
Write Hold Time	t _{wh}		0	—	
Output Enable Hold Time	t _{oeh}		70	—	
CE HIGH Hold Time	t _{ceH}		9.9	—	m s
Data Hold Time	t _{dH}	t _h (D)	80	—	n s

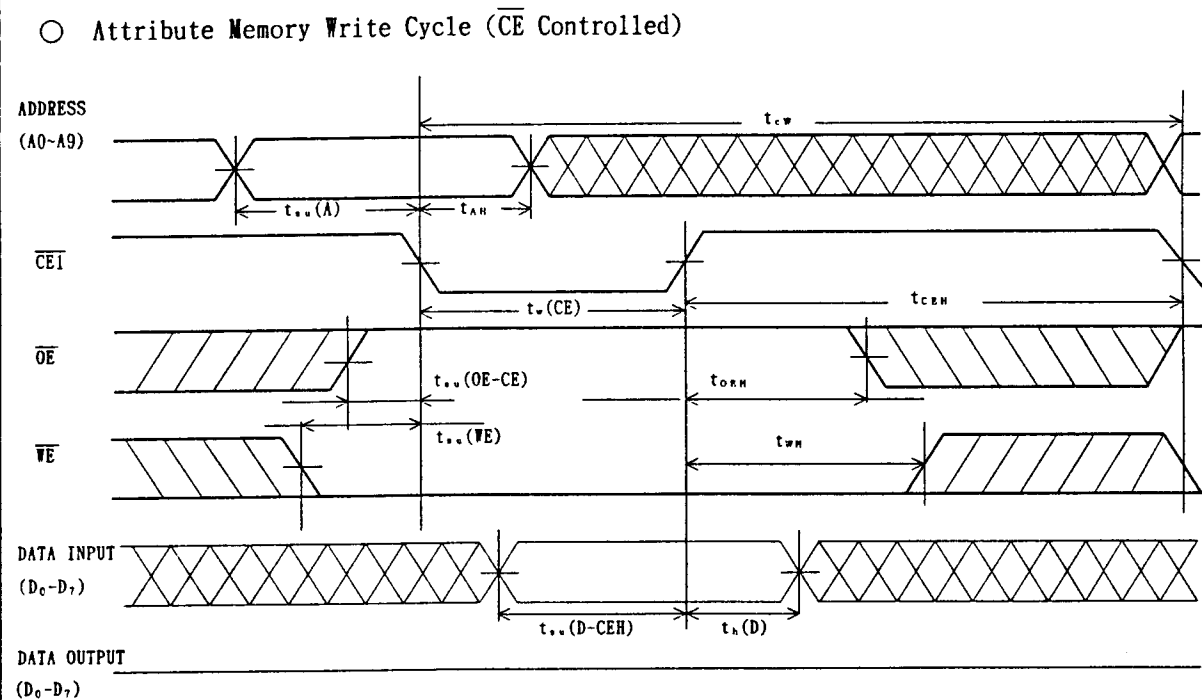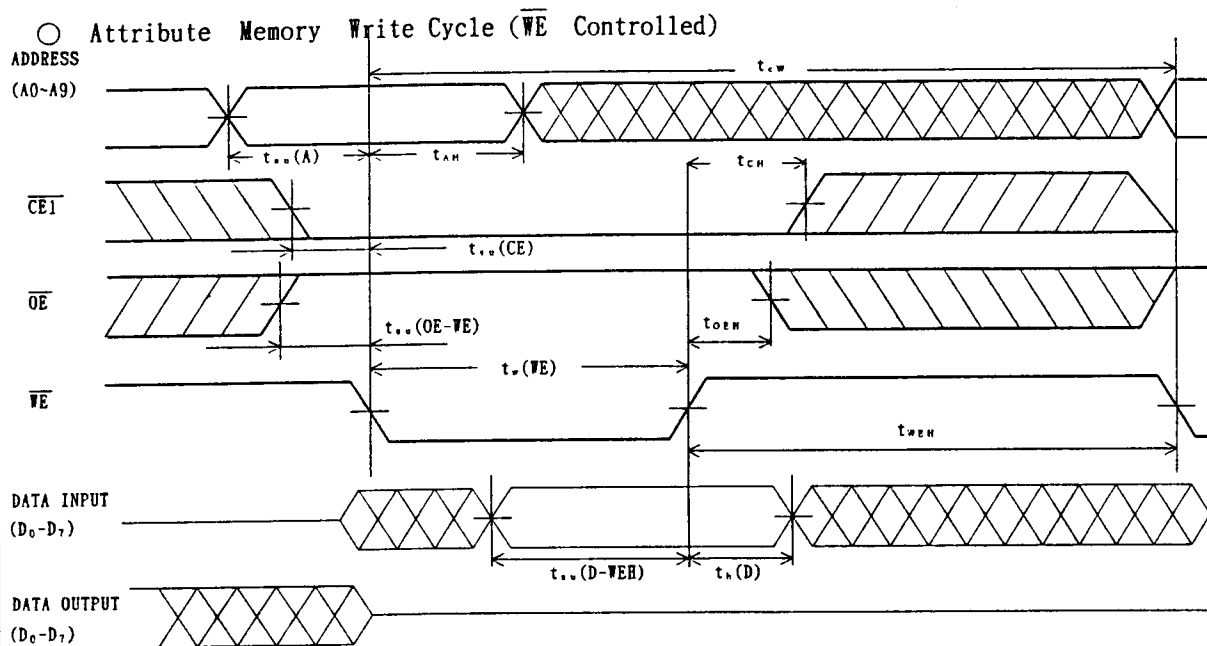

Note: To write attribute memory, $\overline{REG}$ ="LOW" and either $\overline{CE2}$ ="LOW" or else $\overline{CE2}$ ="HIGH" and A0="LOW".

15. Specification Changes

Specifications may be changed upon discussion and agreement between both parties.

16. Othes Precautions



- Permanent damage occurs if the memory card is stressed beyond Absolute Maximum Ratings. Operation beyond the Recommended Operating Conditions is not recommended and extended exposure beyond the Recommended Operating Conditions may affect device reliability.
- Writing to the memory card can be prevented by switching on the write protect switch on the end of the memory card.
- Avoid allowing the memory card connectors to come in contact with metals and avoid touching the connectors, as the internal circuits can be damaged by static electricity.
- Avoid storing in direct sunlight, high temperatures (do not place near heaters or radiators), high humidity and dusty areas.
- Avoid subjecting the memory card to strong physical abuse. Dropping, bending, smashing or throwing the card can result in loss of function.
- When the memory card is not being used, return it to its protective case.
- Do not allow the memory card to come in contact with fire.

SHARP

17. External Diagrams

(A) ENLARGEMENT OF THE


WRITE-PROTECT SWITCH

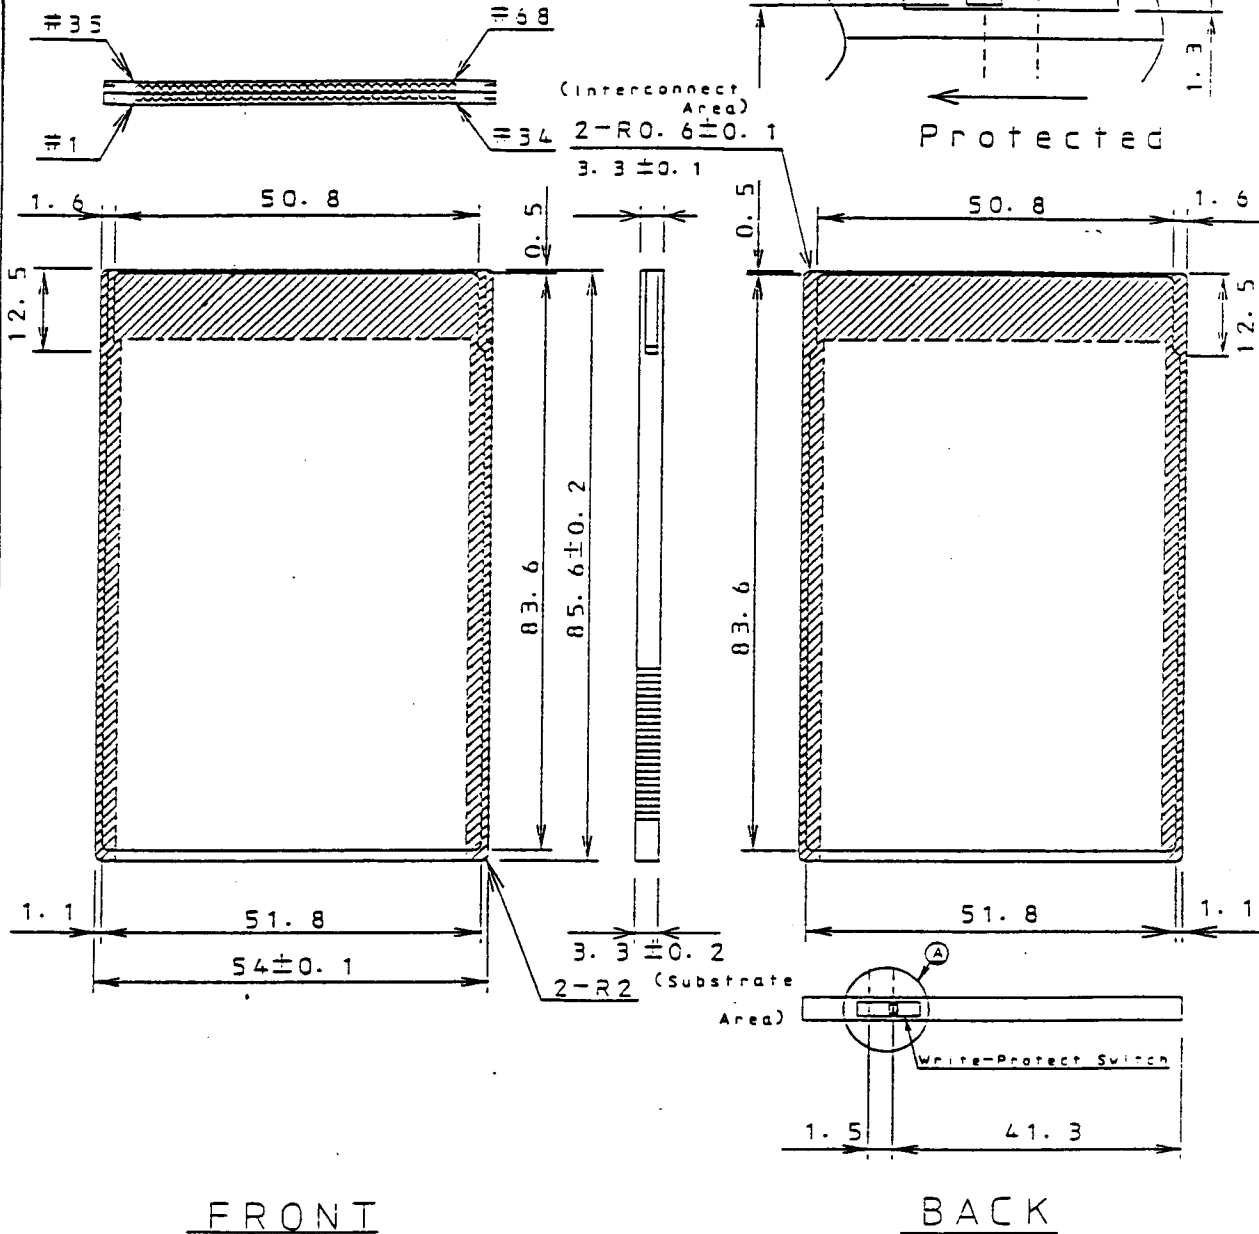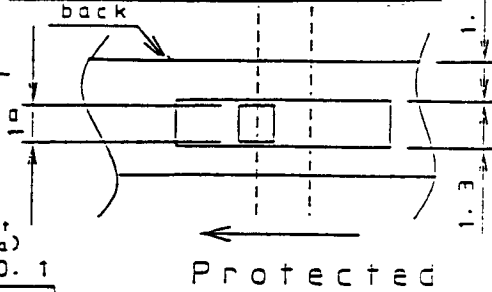


APPLICABLE		SCALE	UNIT	(A)		
MODEL		1/1	mm	(A)	CH. DATE	REVISE
THICKNESS		MATERIAL	FINISH		NAME	MEMORY CARD
						EXTERNAL DIAGRAM
DATE	1994. 11. 16					PCMCIA Rel. 2.0 TYPE:
DESIGN	DRAW	TRACE	CHECK	APPROVE	TENRI IC GROUP	
					DRAWING NO.	IMC001-A102
					SHARP CORPORATION	

SHARP**19. EXTERNAL APPEARANCES**


CONNECTOR SIDE

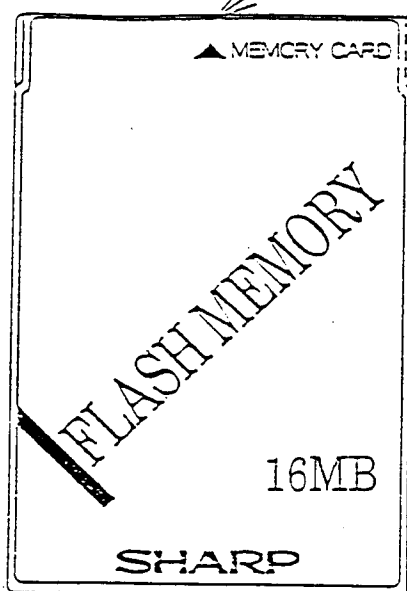

FRONT PANEL

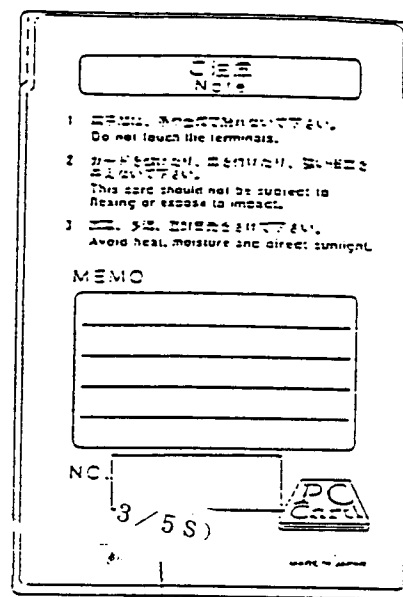LABELING POSITION
BACK PANEL

LABEL SIZE AND DENOTATIONS

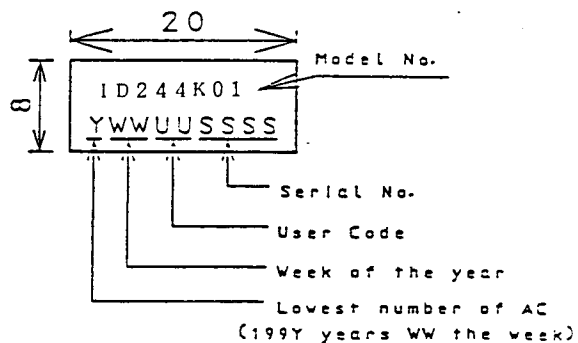

APPLICABLE MODEL	ID244K01	SCALE	UNIT	mm	CH. DATE	REVISE	CHARGE
THICKNESS	DIFFERENCE	MATERIAL	FINISH	NAME			
DATE	1995. 10. 10						
MEMORY CARD BUSINESS PROJECT TEAM							
INTEGRATED CIRCUITS GROUP							
SHARP CORPORATION				DRAWING NO.			

ID24XXXX

SHARP

18. PACKING SPECIFICATION

Connector Side

IC Memory Card

Back Panel

SHARP CORPORATION

Label the Model No. and Manufacturing No.


Note 4

Packing Specification



1. Label the Model No. and Manufacturing No. on the back panel of the card.
2. Each memory card is contained in the flexible plastic case. (The outside of the card comes to the place where the card is released and the connector is not touched by finger, as shown in the figure.)
3. The inner carton contains 25 pieces of the card with the case. (Note 1.)
4. The product name, lot no. (product no.), quantity and the date are either written directly on the inner carton, or printed on the label which is then attached on inner carton.
5. The outer carton contains 4 inner cartons. (Note 2.)
6. The product name, lot no. (product no.), quantity and the date are either written directly on the outer carton, or printed on the label which is then attached on the outer carton.
7. The outer carton is then put in the outer case, which contains 4 outer cartons. (Note 3.)
8. The product name, lot no. (product no.), quantity and the date are either written directly on the case or printed on the label which is then attached on the case.

Parts List

Parts Name	
A Flexible Plastic Case	
B Inner Carton (25 pieces contained)	
C Outer Carton (100 pieces contained)	
D Outer Case (400 pieces contained)	

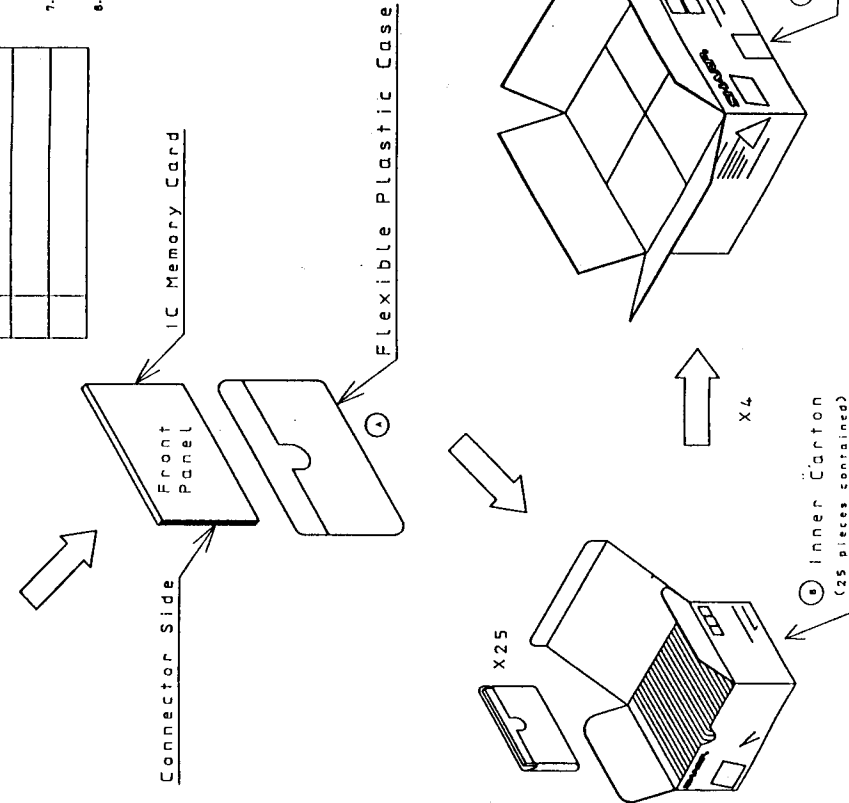

- Note 1. The least packing unit is 25 pieces, which is the number contained in the inner carton.
2. The space inside the outer carton is filled card board.
3. The other size of outer case may be used if there is not enough quantity to fill the normal outer case which can contain 4 outer cartons.
4. Size of label and generations are following. (Unit:mm)

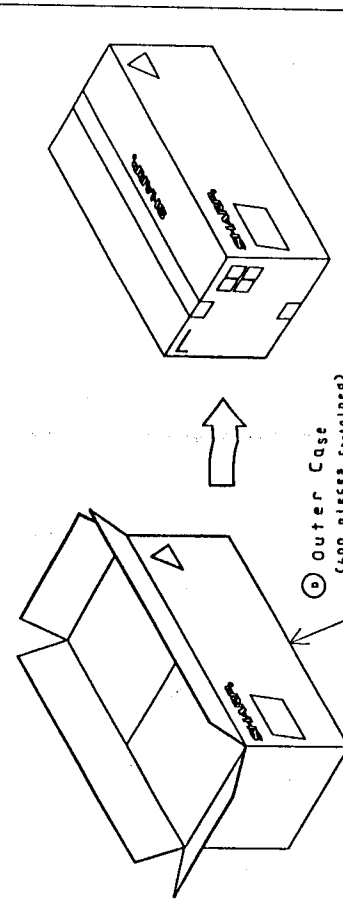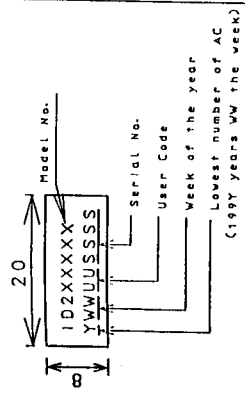

APPLICABLE MODEL	SCALE	UNIT	CH. DATE	REVISE	CHARGE
ID24XXXX	mm	mm			
THICKNESS	REFERENCE	MATERIAL	FINISH	NAME	PACKING SPECIFICATION
DATE	1995.10.10				
SHARP CORPORATION DRAWING NO. IMC025-J300					

Flash cards, 16 MByte, Memory, PCMCIA Linear, ID244K01