RSG ELECTRONIC COMPONENTS
RSG Electronic Components GmbH ▪ Sprendlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ www.rsg-electronic.de
Änderungen vorbehalten / subject to change without notice

160 WATT POWER FACTOR CORRECTED SUPPLIES

DESCRIPTION

The PFC160 series of AC/DC switching power supplies are capable of delivering 165 watts of continuous power and incorporate active power factor correction. Two outputs in each unit are equipped with current sharing. Other features include remote sense, Power Fail Detect signal and isolated outputs. The units are constructed on a printed circuit board with a U-bracket for mechanical support and heat sinking. The series is designed for use in medium-power data networking, telecom, industrial, test and office equipment.

PFC160 SERIES



Safety Standard Approvals:

FEATURES

- Power Factor 0.98 typical
- 85 VAC to 264 VAC universal input
- In compliance with EN 55024, EN 61000-3-2 and EN 61000-3-3
- Overvoltage protection
- Short-circuit protection
- Power Fail Detect (PFD) and remote inhibit
- 100% burn-in at full rated load
- Remote sense on output #1 and output #2
- DC power good
- 5V stand by output

INPUT SPECIFICATIONS

Input voltage:	85 to 264 VAC
Input frequency:	47 to 63 Hz
Input current:	2.9A (rms) for 115VAC 1.4A (rms) for 230VAC
Leakage current:	0.4mA max. @115VAC, 60Hz 0.8mA max. @230VAC, 50Hz

OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart
Total output power:	165 watts maximum
Ripple and noise:	1% or 50mV peak to peak maximum
Overvoltage protection:	Provided on output #1 only; set at 112 - 132 % of its nominal output voltage
Overcurrent protection:	All outputs protected to short circuit conditions
Temperature coefficient:	All outputs +/-0.04%/°C maximun
Transient response:	Maximum excursion of 4% or better on all models; recovering to 1% of final value within 500us after a 25% step load change
PFD signal:	TTL logic high for normal operation and TTL logic low upon loss of input power. This signal appears at least 1 ms prior to master output dropping 5% below its nominal value. This signal also provides a minimum delay of 100 ms after master output is within regulation.

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0°C to +70°C
Storage temperature:	-40°C to +85°C
Relative humidity:	5% to 95% non-condensing
Derating:	Derate from 100% at +50 °C linearly to 50% at +70 °C
Cooling:	165 watts continuous output power at 30 CFM forced air cooling or 80 watts at convection cooling

GENERAL SPECIFICATIONS


Switching frequency:	94KHz +/-10KHz
Power factor:	0.98 typical
Efficiency:	70% minimum on all models
Hold-up time:	20 msec minimum at 110VAC
Line regulation:	+/-0.5% maximum at full load
Inrush current:	18 amps @ 115VAC, or 36 amps @ 230VAC, at 25 °C cold start
Withstand voltage:	3000VAC from input to output 1500VAC from input to ground 500VAC from output to ground
MTBF:	300,000 hours minimum at full load at 25°C ambient, calculated per MIL-HDBK-217F
EMI/EMC compliance:	EN55022 class B — Conducted and Radiated Emissions EN61000-3-2 class D — Current Harmonic EN61000-4-2: 6KV contact, 8KV air — Static Discharge EN61000-4-3: 3 V/meter — RF Field Susceptibility EN61000-4-4: 1KV — Fast Transient/Bursts EN61000-4-5: 1KV diff., 2KV com. — Surge Immunity EN61000-4-6: 3V/m — CS EN61000-4-8 — PFM Field immunity EN61000-4-11 — Voltage Dip
Safety reguirements:	To be approved to: (a) UL; UL 60950 (b) CSA; CSA C22.2 No. 60950 (c) TUV; EN60950 (d) CB; IEC 60950

OUTPUT VOLTAGE/CURRENT RATING CHART

Model	Output #1 Vnom.	Imax. No Fan	Imax. 30 CFM	Ipeak	Tol.	Output #2 Vnom.	Imax. No Fan	Imax. 30 CFM	Ipeak	Tol.	Output #3 Vnom.	Imax. No Fan	Imax. 30 CFM	Ipeak	Tol.	Output #4 Vnom.	Imax. No Fan	Imax. 30 CFM	Ipeak	Tol.	Max. Output Power
PFC160-12B	12V	6.7A	15A	20A	2%			(N/A)					(N/A)					(N/A)			180W
PFC160-14B	24V	3.4A	7.5A	10A	2%			(N/A)					(N/A)					(N/A)			180W
PFC160-18B	48V	1.7A	3.75A	5A	2%			(N/A)					(N/A)					(N/A)			180W
PFC160-31-3B	+3.3V	15A	30A	38A	2%	+5.1V	10A	20A	22A	3%	12V	2A	4.5A	5A	3%			(N/A)			165W
PFC160-36B	+5.1V	15A	30A	32A	2%	+12V	5A	10A	11A	3%	24V	2A	3A	4A	3%			(N/A)			165W
PFC160-40B	+5.1V	15A	30A	32A	2%	+12V	5A	10A	11A	3%	12V	2A	4A	5A	3%	5V	2A	4A	5A	3%	165W
PFC160-40-2B	+2.5V	15A	30A	38A	2%	+3.3V	10A	20A	22A	3%	12V	2A	4A	5A	3%	5V	2A	4A	5A	3%	165W
PFC160-40-3B	+5.0V	15A	30A	32A	2%	+3.3V	10A	20A	22A	3%	12V	2A	4A	5A	3%	12V	2A	4A	5A	3%	165W
PFC160-42-2B	+3.3V	15A	30A	38A	2%	+2.5V	10A	20A	22A	3%	12V	2A	4A	5A	3%	12V	2A	4A	5A	3%	165W
PFC160-42-3B	+3.3V	15A	30A	38A	2%	+5V	10A	20A	22A	3%	12V	2A	4A	5A	3%	12V	2A	4A	5A	3%	165W

Notes: (1) Peak output current with 10% maximum duty cycle for less than 30 seconds.
(2) 165 watts at 30 CFM force air cooling or 80 watts maximum at convection cooling.
(3) Total output current between Vo1 & Vo2 is 40A maximum.
(4) Output #1 and Output #2 are built for current sharing.
(5) Output #3 and Output #4 is isolated from others and has individual return.

MECHANICAL SPECIFICATIONS

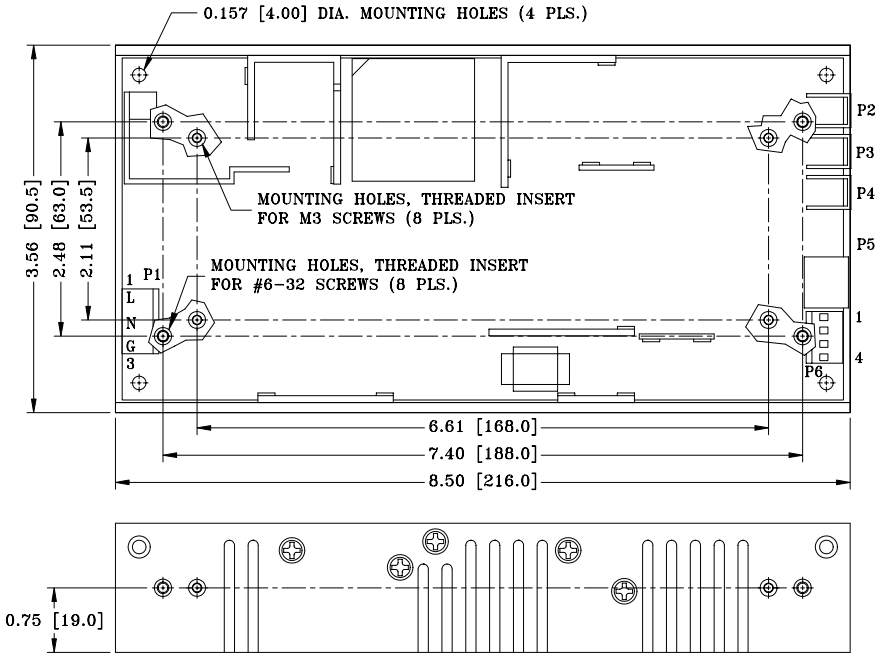

NOTES:
1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Input connector P1 mates with Molex housing 09-50-8051 and Molex 2878 series crimp terminal.
4. Output connector P6 mates with Molex housing 09-50-8041 and Molex 2878 series crimp terminal.
5. Connector P5 mates with Molex housing 90142-0010 and pins 90119-2110.
6. Connector P2,P3,P4 mates with Molex housing BB-124-08.
7. Weight: 1.05 Kgs (2.32 Lbs.) approx.

PIN CHART

Single Output models

CONN / PIN / MODEL	P1			P2	P3	P5		
	1	2	3			1	2	3
PFC160-12B PFC160-14B PFC160-18B	LIVE	NEUTRAL	GROUND	OUTPUT # 1	COM.	VO2 SWP	5V STAND BY	+VO2 SENSE

CONN / PIN / MODEL	P5						
	4	5	6	7	8	9	10
PFC160-12B PFC160-14B PFC160-18B	VO1 SWP	COMMON	+VO1 SENSE	SENSE COMMON	REMOTE INHIBIT	DC POWER GOOD	PFD

Multiple Output models

CONN / PIN / MODEL	P1			P2	P3	P4	P5				
	1	2	3				1	2	3	4	5
PFC160-31-3B PFC160-36B	GROUND	NEUTRAL	LIVE	OUTPUT # 1	COM	OUTPUT # 2	VO2 SWP	5V STAND BY	+VO2 SENSE	VO1 SWP	COMMON
PFC160-40B PFC160-40-2B PFC160-40-3B PFC160-42-2B PFC160-42-3B	GROUND	NEUTRAL	LIVE	OUTPUT # 1	COM	OUTPUT # 2	VO2 SWP	5V STAND BY	+VO2 SENSE	VO1 SWP	COMMON

CONN / PIN / MODEL	P5					P6			
	6	7	8	9	10	1	2	3	4
PFC160-31-3B PFC160-36B	+VO1 SENSE	SENSE COMMON	REMOTE INHIBIT	DC POWER GOOD	PFD	OUTPUT # 3	OUTPUT # 3 RET.	N.C.	N.C.
PFC160-40B PFC160-40-2B PFC160-40-3B PFC160-42-2B PFC160-42-3B	+VO1 SENSE	SENSE COMMON	REMOTE INHIBIT	DC POWER GOOD	PFD	OUTPUT # 3	OUTPUT # 3 RET.	OUTPUT # 4	OUTPUT # 4 RET.

RSG. ELECTRONIC COMPONENTS
RSG Electronic Components GmbH ▪ Sprendlinger Landstr. 115 ▪ D-63069 Offenbach/Germany
Tel. +49 69 984047-0 ▪ Fax +49 69 984047-77 ▪ info@rsg-electronic.de ▪ **www.rsg-electronic.de**
Änderungen vorbehalten / subject to change without notice