Signal conditioning module

TxxxxHL Series

MORNSUN®

Two-wire Self-Powered signal conditioning module with HART



PART NUMBER SYSTEM

TxxxxHL

- Package
- Supply HART protocol
- Distribution voltage
- Distribution current
- Input signal
- Input signal type
- Isolation Amplifier

FEATURES

- Convert voltage to current and offer isolated power output
- Self-powered, no external supply required
- High accuracy (0.1% F.S.)
- High linearity (0.1% F.S.)
- High isolation voltage(2KVAC/1mA/60s)
- Small size: SIP9 (26*9.5*12.5mm)
- Extremely low temperature drift:50ppm/℃
- Operating temperature range: -40°C ~ +85°C
- HART compatible

TxxxxHL is a specific with HART smart field instruments launched signal conditioning modules,The isolation module is designed for transmitting the input voltage signal to the output isolation current that the value is a standard 3.7~22mA through output loop-powered , the module can offer a isolation micro-power for the pre-devices. The module also has an integrated HART signal channel, according to the recommended solutions, it can realize the Half duplex communication of The field and control area, which greatly reduce the wiring cost between the field and the control area.

The module adopts unique electromagnetic isolation mode and high performance level after. The module achieves the function of transmitting voltage signal to a 3.7~22mA standard signal isolation accurately conversion, which be used in a variety of instruments analog input port (such as PLC, DCS systems, etc.) to match.

In addition, this module has extremely small form factor (SIP9) and excellent temperature drift characteristics (at -40 ℃ ~ +85 ℃ operating temperature range drift is less than 50PPM / ℃), this module can bear 2KVAC isolation voltage between the input and output.

Selection Guide

Part No.	Loop powered voltage (VDC)	Input Signal(VDC)	Output Signal(mA)	Isolation Power Output (VDC)
T797HL	15~24	0~2.5	3.7~22	3.3
T747HL	10~24	0~2.5	3.7~22	3.3

Notes: Customization products are available if required.

Input Specifications

Item		Operating Conditions	Value
Input Power Supply	Loop Power supply		See selection guide
	Max. supply voltage		30V(modules work with 30V power supply for long time, or at no-load condition maybe damaged by over-heat)
Input	Input signal		See selection guide
	Input impedance		≥10MΩ
	Overload		≤5V

Output Specifications

Item		Operating Conditions		Value
Isolation Power	Output voltage			See selection guide
	Output voltage accuracy	TA=25℃		Nominal ±3%
	Max. load current	TA=25℃,loop current 4mA	T797HL	9mA
			T747HL	4mA
	Short circuit protection			Continuous, auto-recovery
Output	Output signal			See selection guide
	Load capacity	T797HL		RL≤(Vin−15)/0.022Ω, Vin is supply voltage
		T747HL		RL≤(Vin−10)/0.022Ω, Vin is supply voltage
	Load regulation	24V Power supply, 0~250Ω load		≤0.05%F.S./100Ω
	Ripple & noise	250Ω/0.01μF load		Vp-p ≤30mV @ Bandwidth 20MHz

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Transmission Specifications

Item	Operating Conditions	Value
Zero Offset		0.1%F.S.
Transmission Error		0.1%F.S.
Temperature Drift	Operating temperature range of -40 to +85℃	≤50ppm/℃
Communication	Vp-p≤250mV	Support bidirectional transmission of HART signal frequency
HART Signal Transmission Gain	HART Accept the voltage gain	0.8~1.0
	HART Signal emission current peak-peak, the loop current 4mA	＞1mA

General Specifications

Item	Operating Conditions	Value
Electric Isolation		Two-terminal isolation(input and output are mutually isolated)
Isolation voltage	testing for 1 minute, leakage current <1mA, humidity <70%	2.0KVAC
Insulation Resistance	500VDC	≥100MΩ
Operating Temperature		-40℃~+85℃
Transportation and Storage Temperature		-50℃~+105℃
Max Casing Temperature	Ta=25℃,24V Power supply, 250Ω load	≤50℃
Environment		The presence of dust, fierce vibration, impulsion and corrosive gas may cause damage to the product.


Physical Specifications


Casing Material	Plastic
Package	SIP9
Weight	8g(Typ.)
Cooling	Free convection

EMC Specifications


EMS	ESD	IEC/EN61000-4-2	Contact ±4KV	perf. Criteria B
	RS	EC/EN61000-4-3	3V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	Two-wire loop port ±2KV (see Fig. 5 for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	Two-wire loop port ±1KV (see Fig. 5 for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A


Product Characteristic Curve

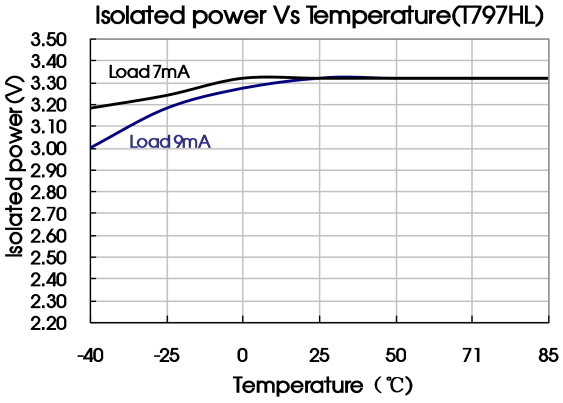

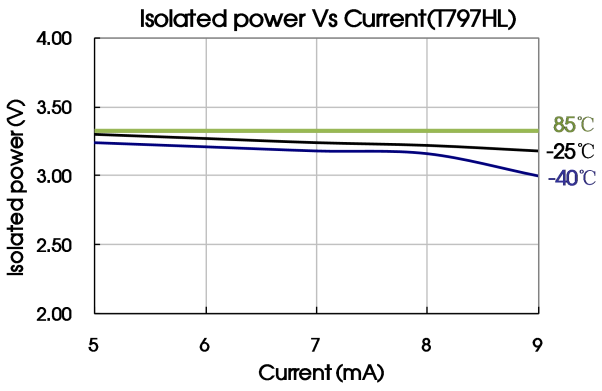

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

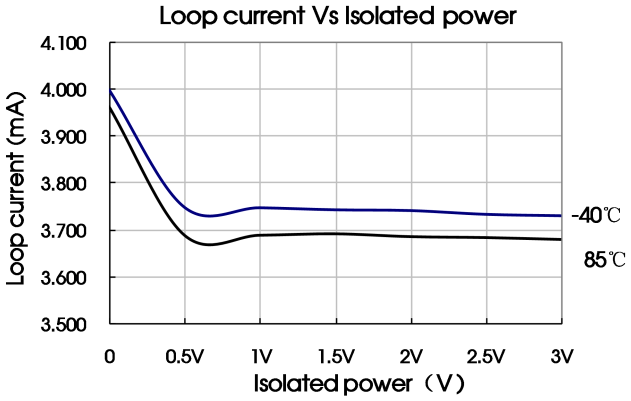

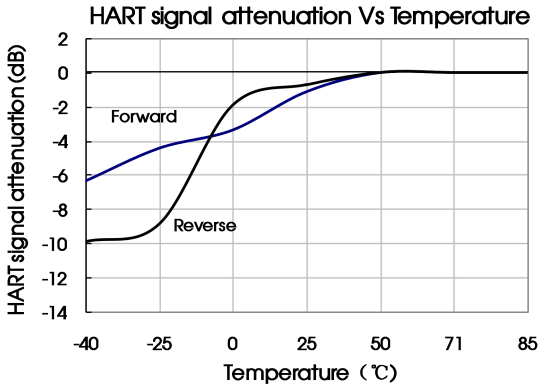

Note: ①The all test results is typical curves, and tested under the 4mA loop current;
②Forward：Two-wire loop to device direction; Reverse: Device to Two-wire loop direction.

Application Precautions

1. Please read the instructions carefully before use; contact our technical directly if you have any problem.
2. Do not use the product in hazardous areas.
3. Use DC power supply for the product and 220V AC power supply is prohibited.
4. Do not dismount and assemble the product without permission to avoid failure or malfunction of equipment.

After-sales service

1. Ex-factory inspection and quality control have been strictly conducted for the product; if there occurs abnormal operation or possibility of failure of internal module, please contact the local representative or our technical support.
2. The warranty period for the product is 3 years as calculated from the date of delivery. If any quality problem occurs under normal use within the warranty period, the product can be repaired or changed for free.

Applied circuit

Please refer to Isolated Transmitter Application Notes

Design Reference

1. Typical application

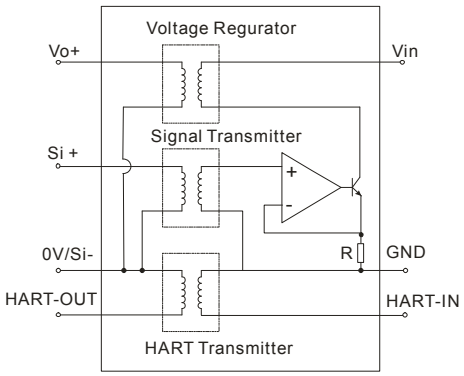


Fig. 1 signal conditioning module functional diagram

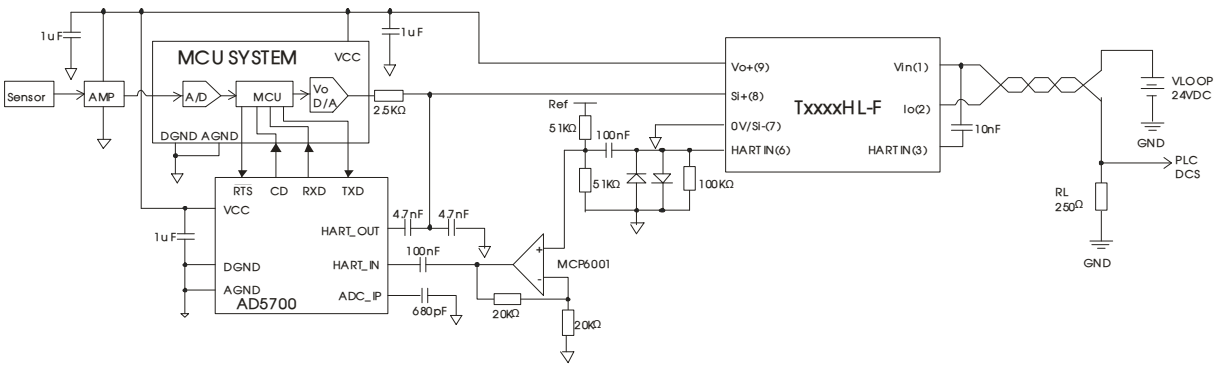


Fig. 2 field area HART communication application

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Description

Fig.2 shows a typical application of the Signal conditioning module TxxxxHL. MCU system, HART modem IC AD5700 and the signal conditioning module TxxxxHL work together for the communication between smart field devices and control systems .

The transmission of analog signal

As Fig.2, the signal conditioning module taking energy from the output current Loop to supply its internal dissipation, at the same time, it could provide one isolated power Vo+, for the MCU system and the other smart field devices. The Analog signal comes from sensor, after the AMP module, it is received by the MCU system, when the signal is output from the MCU system, it should be a voltage signal that match with the Signal conditioning module TxxxxHL at the range of voltage, at last, the voltage signal is converted to standard 3.7~22mA signal within the two-wire current loop.

HART send

the signal conditioning module TxxxxHL didn't provides a single channel for HART signal transmitting from field area to control systems, but a common channel with analog signal. With a few external components, the signal which come from MCU, is modulated and added into the analog signal, and they will be send to control systems together. The peak voltage of HART signal must be consider before communication, the peak voltage of the Hart Signal that output by AD5700 is too high to match the range of TxxxxHL (500mV typically, see the datasheet of AD5700 for details), two external capacities of 47nF and a resistance of 2.5K is recommended to drop Voltage.

HART detect

Working with a external 10μF capacity, TxxxxHL can detect HART signal which is contained in the two-wire loop-circuit by the HART_IN PIN(PIN 3). After the condition of TxxxxHL, HART signa has been Transmitted to field area, at last, HART signal is demodulated by IC AD5700, for the reading of MCU. By the way, HART signal could not be demodulated by IC AD5700 if its amplitude is lower then the value of specification (100mV typically, see the datasheet of AD5700 for details). In this condition, the peak voltage of HART signal which is send by control system should be upgraded.

Application without HART

The hole system which shown in Fig.2, provides a solution for the Transmitting of the sensor signal to the 3.7~22mA standard current signal and the HART communicating between smart field devices and control systems, what's more, all the connections between field area and control area are only two analog wires, therefore, lower cost for systems is possible. In the control systems, a resistor RL should be concluded for the detecting of common instruments. If the function of HART communicating is not necessary, please remove the HART modem IC A5700 in the system, and do not connect the HART_IN PIN and HART_OUT PIN of TxxxxHL into any circuits.

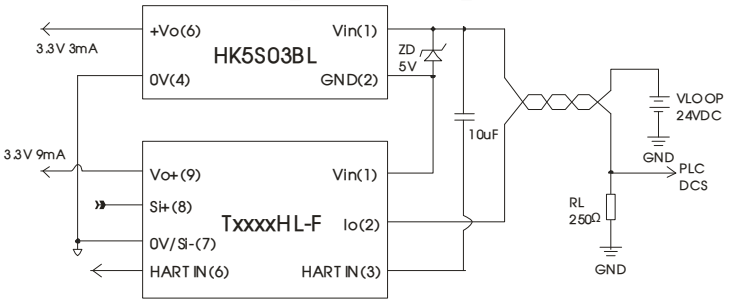


Fig. 3 Power capacity expansion program of field area

Description

Fig.3 shows another typical application of TxxxxHL, in order to expand the power supply to field area, a power module HK5S03BL is added into the system.

As Fig.3 shows, the capacity of TxxxxHL power supplying is 3mA, so it is with HK5S03BL , so there are two powers the field area, two the capacity of power supplying up to 12mA.

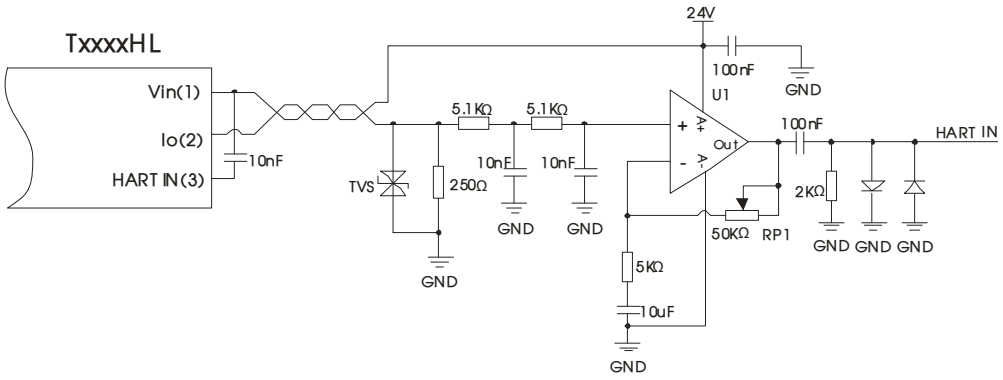


Fig. 4 HART signal amplification method

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Description

Figure HART host communication signal amplification circuit, is designed to solve the problem of HART signal attenuation in long cable transmission application.

The analog signal conversion: the use of a 250Ω resistor current signal into a voltage signal.TVS tube protection port, recommend using 12V or 15V TVS.

HART receives the signal filtering, amplification and limiting: HART current signal in the 250Ω resistor is converted to voltage signal , Through low pass filter, the filter cut-off frequency is about 2.5KHz, Filter the high frequency noise, keep the analog signal as a DC offset signal amplification. After filtering, HART signal through AC amplifying circuit, the AC gain can be adjusted by adjusting the RP1, the adjusting range is 1~11 times. Next, through a high pass filter, filter out the DC offset and low frequency interference, the cut-off frequency is about 800Hz. Finally the two diodes and achieve the limit, the voltage limit at ±0.7V, protect AD5700 port.

2. EMC solution-recommended circuit


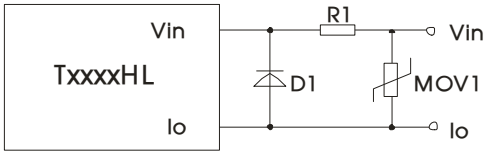



Fig. 5 EMC recommended circuit

Components	Recommended parameters
MOV1	S07K30
R1	12Ω/2W
TVS1	SMCJ30A


3. For more information please find the application notes on www.mornsun-power.com

Dimensions and Recommended Layout

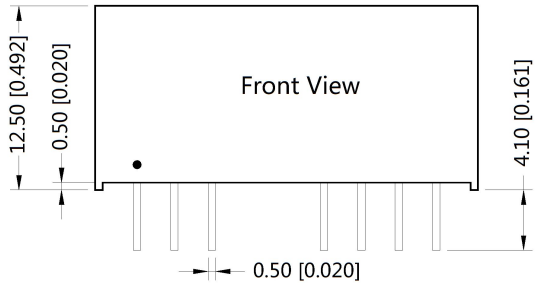

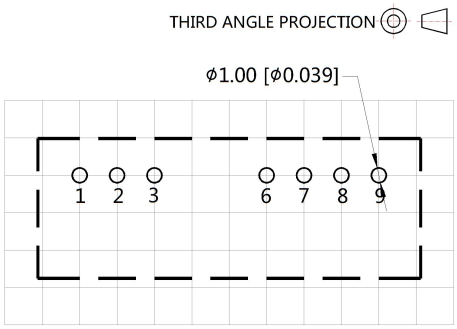

Note : Grid 2.54*2.54mm

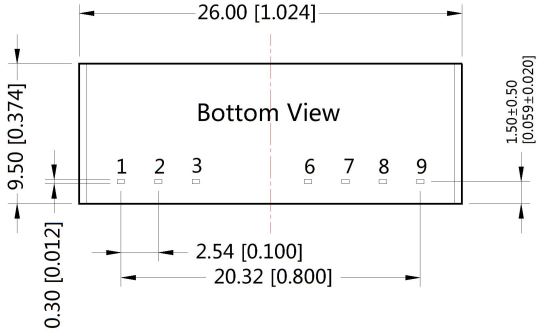

Pin-Out	
Pin	Fuction
1	Vin
2	Io
3	HART_IN
6	HART_OUT
7	0V/Si-
8	Si+
9	Vo+

Note:
Unit :mm[inch]
Pin section tolerances :±0.10[±0.004]
General tolerances:±0.25[±0.010]

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Notes:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58240002;
2. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25℃, humidity<75% when inputting nominal voltage and outputting rated load;
3. All index testing methods in this datasheet are based on our Company's corporate standards;
4. The performance indexes of the product models listed in this datasheet are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technician for specific information;
5. We can provide product customization service;
6. Specifications of this product are subject to changes without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.
Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Luogang District, Guangzhou, P. R. China
Tel: 86-20-38601850-8801 Fax: 86-20-38601272 E-mail: info@mornsun.cn

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation