





ISDN TRANSFORMERS Through Hole - Dual Package

Bel offers a line of ISDN transformers available in a dual through hole cost effective packaging. Single through hole and dual Surface Mount components also available.

- * High Pot 2000 Vrms.
- * Excellent Longitudinal Balance.
- * Single units also available for design flexibility.

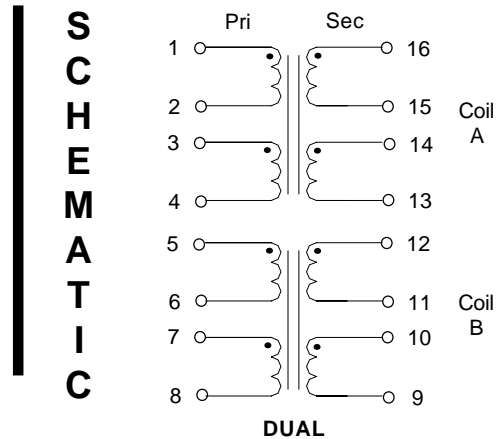

MECHANICALS



Leads on through hole components are 22 AWG Solderable

Dimensions are in inches(mm).
Dimension Tolerance is +/- 0.01(0.25) unless otherwise specified.

ELECTRICALS @ 25° C.

Part Number	Turns Ratio +/- 2%		Primary Inductance OCL(mH) Min	Leakage Inductance L _l (μH) Max		Interwinding Capacitance (pF) Max	CD primary (pF) Max		DCR (ohms) +/- 25%			
	Coil A	Coil B					Coil A	Coil B	Primary		Secondary	
			Coil A & B	Coil A	Coil B	Coil A & B	Coil A	Coil B	Coil A	Coil B	Coil A	Coil B
0559-6200-00	1:2.5	1:2.5	22	40	40	100	110	110	2.5	2.5	5.8	5.8
0559-6200-01	1:2	1:2	22	15	15	100	80	80	2.3	2.3	4.0	4.0
0559-6200-02	1:1	1:1	22	5	5	100	40	40	2.4	2.4	2.4	2.4
0559-6200-03	1:1.853	1:1.853	22	15	15	100	80	80	2.5	2.5	4.3	4.3
0559-6200-04	1:1.8	1:1.8	22	15	15	100	140	140	2.5	2.5	4.2	4.2
0559-6200-05	1:1	1:2	22	5	15	100	40	80	2.4	2.3	2.4	4.0

Primary Inductance, Leakage Inductance, and Interwinding Capacitance are measured at 10KHz, 20mV.

Corporate Office

Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496
Tel: 201-432-0463
Fax: 201-432-9542
E-Mail: BelFuse@belfuse.com
Internet: http://www.belfuse.com

Far East Office

Bel Fuse Ltd.
8F/8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel: 852-2328-5515
Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Preston PR1 8UD
Lancashire, U.K.
Tel: 44-1772-556601
Fax: 44-1772-888366