
M2250 Series

5x7 mm, 2.5 Volt, HCMOS/TTL, Clock Oscillator





- 2.5 Volt Operation
- Standby Option
- High density boards, low power circuits, portable test sets

Ordering Information

M2250 1 3 T C N 00.0000 MHz

Product Series

Temperature Range
- **1:** 0°C to +70°C
- **2:** -40°C to +85°C
- **6:** -20°C to +70°C


Stability
- **3:** ±100 ppm
- **4:** ±50 ppm
- **5:** ±35 ppm
- **6:** ±25 ppm

Output Type
- **F:** Fixed
- **T:** Tristate
- **Q:** Standby Function


Symmetry/Logic Compatibility
- **A:** 40/60 TTL/HCMOS
- **C:** 45/55 HCMOS

Package/Lead Configurations
- **N:** Leadless

Frequency (customer specified)

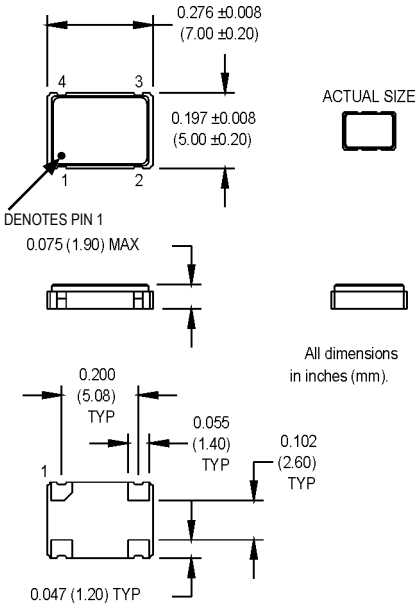

SUGGESTED SOLDER PAD LAYOUT



NOTE: A capacitor of value 0.01 µF or greater between Vdd and Ground is recommended.

Pin Connections


PIN	FUNCTION
1	N/C, Tri-state or Standby
2	Ground
3	Output
4	+Vdd

	PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition
Electrical Specifications	Frequency Range	F	1.0		125	MHz	See Note 1
	Frequency Stability	ΔF/F	(See Ordering Information)				
	Operating Temperature	TA	(See Ordering Information)				
	Storage Temperature	Ts	-55		+125	°C	
	Input Voltage	Vdd	2.375	2.5	2.625	V	
	Input Current	Idd			30	mA	
	Standby Current				10	µA	Standby Mode
	Symmetry (Duty Cycle)		(See Ordering Information)				
	Load				15/10	pF/TTL	
	Rise/Fall Time	Tr/Tf			6	ns	Ref. 0.25 - 2.25 V
	Logic "1" Level	Voh	90% Vdd			V	HCMOS Load
	Logic "0" Level	Vol			10% Vdd	V	HCMOS Load
	Cycle to Cycle Jitter			8	15	ps RMS	1 Sigma
	Standby/Tristate Function		Input Logic "1" or floating; output active Input Logic "0"; output to high-Z				
Environmental	Mechanical Shock	Per MIL-STD-202, Method 213, Condition C					
	Vibration	Per MIL-STD-202, Method 201 & 204					
	Hermeticity	Per MIL-STD-202, Method 112 (1 x 10^{-8} atm.cc/s of helium)					
	Solderability	Per EIAJ-STD-002					

1. Not all frequencies are available. Please contact factory for availability.

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

MtronPTI Lead Free Solder Profile

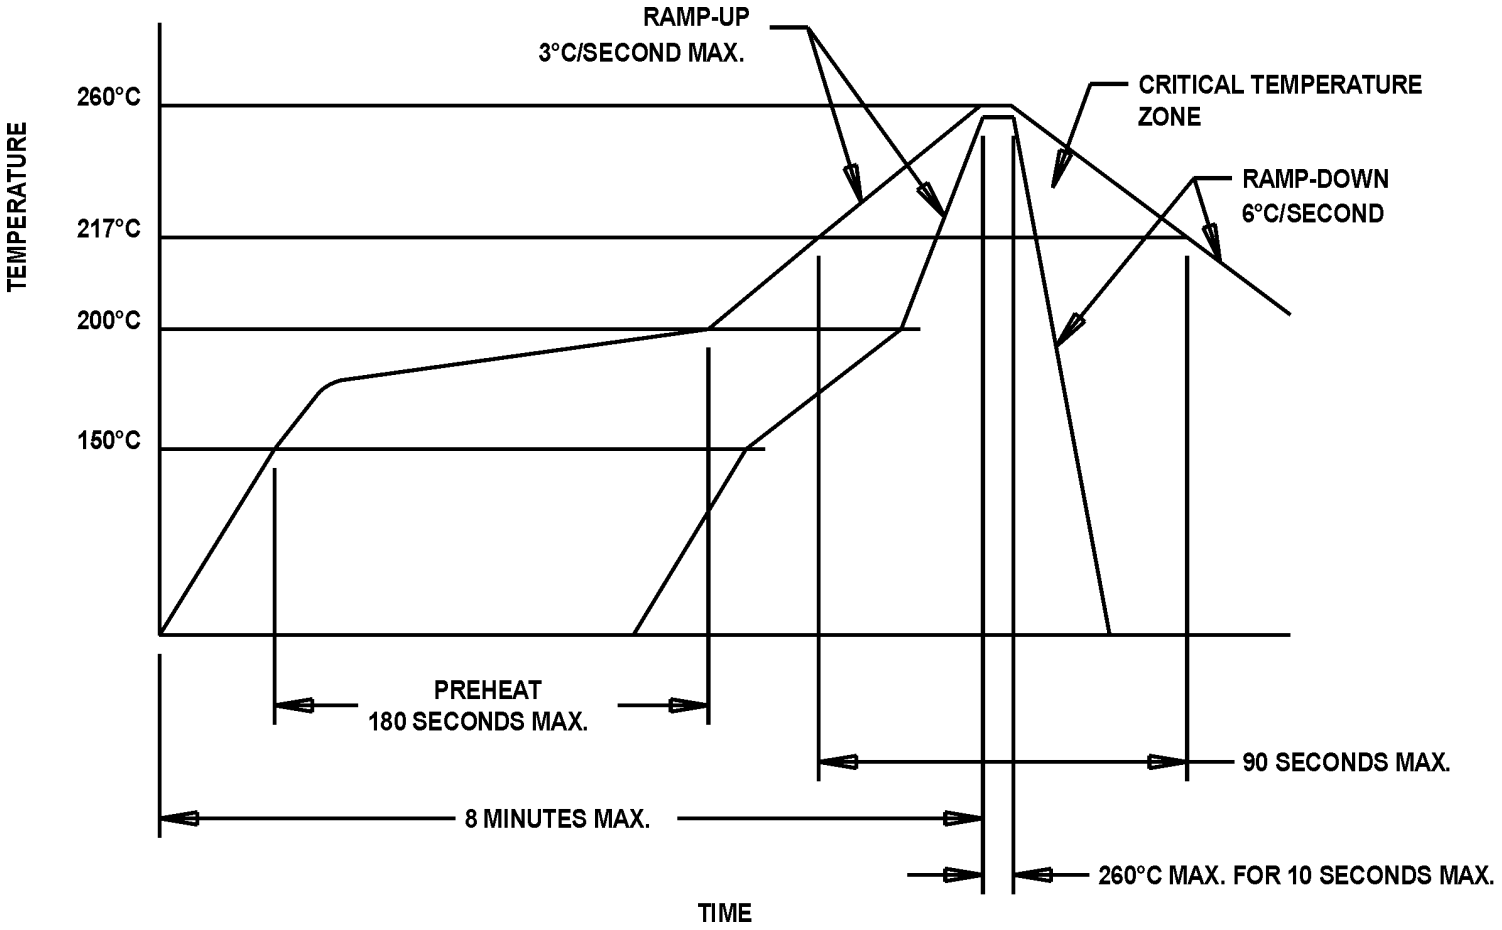

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see **www.mtronpti.com** for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI **1-800-762-8800.**