

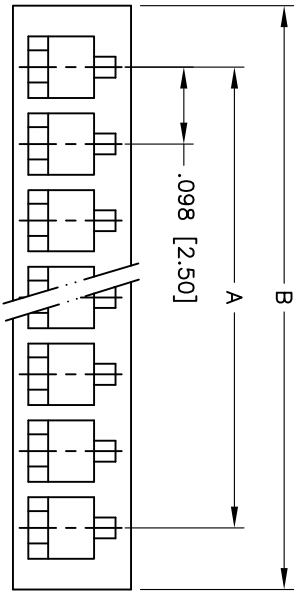


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/22/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

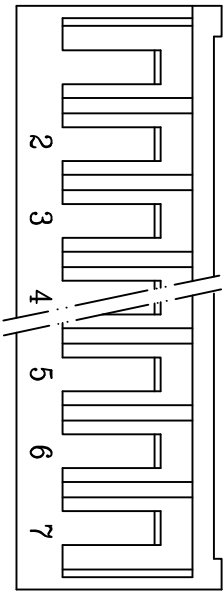

Positions: 02 thru 16  
 A = .098 [2.50] x No. of Spaces  
 B = .098 [2.50] x No. of Spaces + .157 [4.00]

**SPECIFICATIONS:**

Material: Nylon 66 UL 94V-0  
 Insulator color: White  
 Electrical:  
 Operating voltage: 250V AC/DC  
 Current rating: 2.5A AC/DC  
 Insulation resistance: 1,000Mohms min.  
 Withstand voltage: 800V AC for 1 minute.  
 Environmental:  
 Lead free, RoHS compliant



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**SHROUDED CRIMP TERMINAL HOUSING**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZES		DATE	
.X	± .10	ØX	± .10	DATE	
.XX	± .020	ØXX	± .015	DATE	
.XXX	± .015	ØXXX	± .010	DATE	
DRAWN		DY		10/22/10	
CHECKED					
APPROVED					
REF:	S00163T	SCALE:	NTS	SHEET	1 OF 1

6 5 4 3 2 1