Pushing Performance

Han Full High Density Module, crimp-F

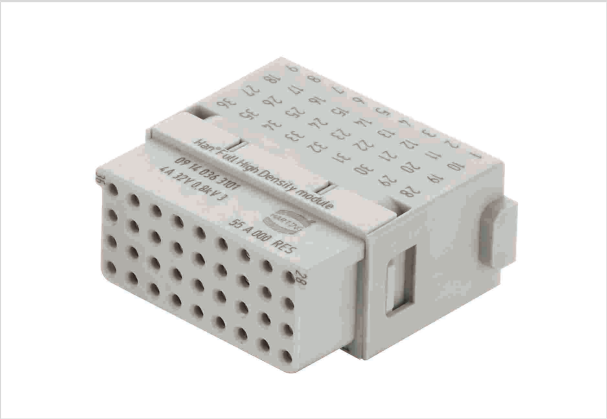


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 036 3101
Specification	Han Full High Density Module, crimp-F
HARTING eCatalogue	https://b2b.harting.com/09140363101

Identification

Category	Modules
Series	Han-Modular®
Type of module	Han® Full High Density module

Version

Termination method	Crimp termination
Gender	Female
Number of contacts	36
Details	Please order crimp contacts separately.

Technical characteristics

Conductor cross-section	[0,09] ... [0,52 mm²]
Rated current	4 A
Rated voltage	32 V
Rated impulse voltage	0.8 kV
Pollution degree	3
Insulation resistance	$>10^{10}$ Ω
Limiting temperature	[-40] ... [+125 °C]
Mating cycles	≥500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com

Pushing Performance

Material properties

Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Potassium 1,1,2,2,3,3,4,4,4-nonafluorobutane-1-sulphonate
ECHA SCIP number	60b1a572-bb3f-476f-9307-b7d1688bd90c

Specifications and approvals

Specifications	EN 60664-1 IEC 61984
CE	0

Commercial data

Packaging size	2
Net weight	6.2 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440217 Module for industrial connectors (power/signals)

HARTING Electric GmbH & Co. KG | Wilhelm-Harting-Straße 1 | 32339 Espelkamp | Germany
Phone +49 5772 47-97100 | electric@HARTING.com | www.HARTING.com