
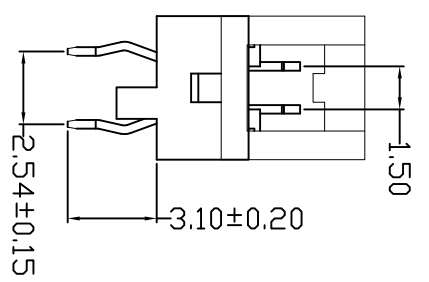


REV.	ECN. NO.	APPD.
A		

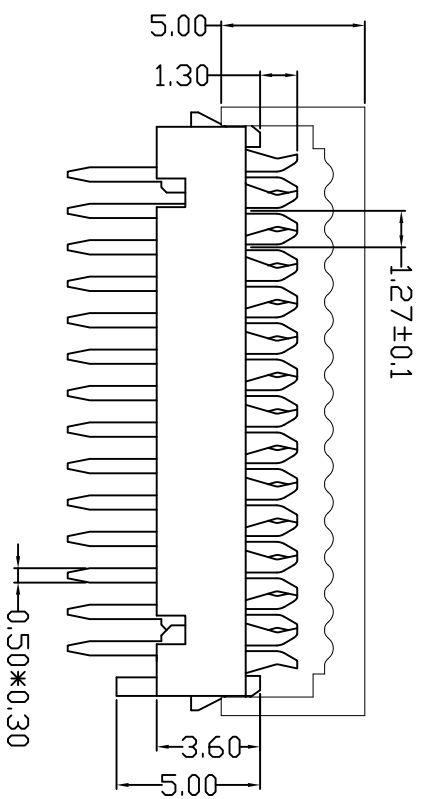

**Material:**  
 Insulator: Glass filled NY46 UL94V-0  
 Contacts: Brass / Phosphor Bronze T=0.25  
 Plating: Tin Plated


**Electrical Characteristics:**  
 Contact Resistance: 20mΩmax. at DC 100mA  
 Insulator Resistance: 1000MΩmin. at 500V DC  
 Withstanding Voltage: 500V AC/rms 50Hz For 1 minute  
 Current Rating: 1 AWP  
 Operating Temperature: -40°C~+105°C

PINS	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.4
24	33.85	27.94
26	36.39	30.48

**Ordering Information:**

MTMR39-XX X X-01  
 M:Male  
 F:Female  
 No. of Pins

S: Straight  
 R: Right  
 M: SMT  
 C: Cable

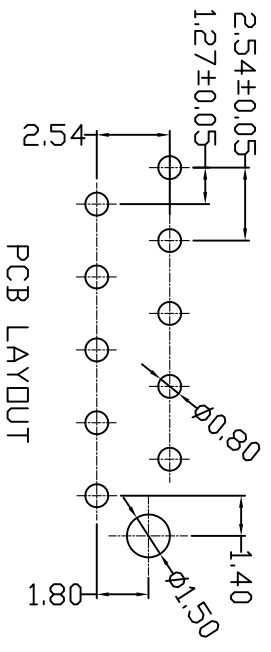

PCB LAYOUT

X ±0.20	X° ±5°	UNITS mm	NAME (INTENDED USE)	TITLE
.XX ±0.10	.X° ±2°	MAT'L	PART NO. (INTENDED USE)	MICRO MALE CABLE 長腳 有缺
.XXX ±0.05	.XX° ±1°	FINISH	APPD: SUNNY	DWG NO.: MTMR39-XXMC-01
	.XXX° ±0.5°	QTY	CHKD: USA	SCALE 1/1
MICRO SOCKET CONNECTOR			DR: ZOE	2006-11-28
				SHEET 1/1
				REV. A

**MINTRON CO., LTD.**

1 2 3 4 5 6 7

A B C D E