


# Product data sheet

Specifications

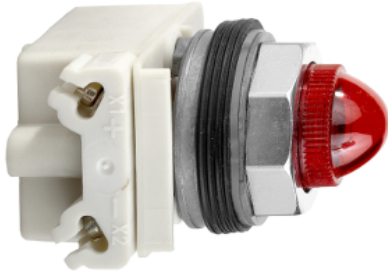

## PILOT LIGHT 28V 30MM TYPE K +OPTIONS

9001KP35R9

**Product availability : Non-Stock - Not normally stocked in distribution facility**

**Price\* : 125.00 USD**

### Main

Range of product	Harmony 9001K
Product or Component Type	Pilot light
Device short name	9001K

### Complementary

Bezel material	Chromium plated metal
Mounting diameter	1.18 in (30 mm)
Shape of signaling unit head	Round
Lens type	Domed plastic
Cap/Operator or lens colour	Red
Light source	incandescent
Bulb base	BA 9s
Light block supply	Direct 24...28 V AC/DC
Connections - terminals	Screw clamp terminals, 1 x 0.22...2 x 1.5 mm <sup>2</sup> IEC 60947-1
Tightening torque	7.08 lbf.in (0.8 N.m) IEC 60947-1
Shape of screw head	Cross slotted
Shape of screw head	Cross slotted
Operating position	Any position
[Ui] rated insulation voltage	250 V 2)IEC 60947-1
[Uimp] rated impulse withstand voltage	2.5 kV IEC 60947-1
Short-circuit protection	10 A cartridge fuse IEC 60947-5-1
Light source	Incandescent
[Ith] conventional free air thermal current	10 A
CAD overall width	2.13 in (54 mm)
CAD overall height	2.76 in (70 mm)
CAD overall depth	1.65 in (42 mm)
[Us] rated supply voltage	24...28 V AC/DC

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Net Weight</b>	0.30 lb(US) (0.134 kg)
<b>Device presentation</b>	Complete product

## Environment

<b>Standards</b>	JIS C8201-5-1 CSA C22.2 No 14 JIS C 852 EN/IEC 60947-1 EN/IEC 60947-5-1 EN/IEC 60947-5-4 UL 508 JIS C8201-1
<b>Product Certifications</b>	UL 508 NEMA
<b>Protective treatment</b>	TC
<b>Ambient Air Temperature for Storage</b>	-40...158 °F (-40...70 °C)
<b>Ambient air temperature for operation</b>	-13...158 °F (-25...70 °C)
<b>Vibration resistance</b>	7 gn 2...500 Hz)IEC 60068-2-6
<b>Shock resistance</b>	50 gn IEC 60068-2-27
<b>Overvoltage category</b>	Class II IEC 61140
<b>IP degree of protection</b>	IP66 IEC 60529
<b>NEMA degree of protection</b>	NEMA 1 NEMA 12 NEMA 13 NEMA 2 NEMA 3 NEMA 3R NEMA 4 NEMA 6

## Ordering and shipping details

<b>Category</b>	21426 - 9001 K (NOT KA,KM,KX)
<b>Discount Schedule</b>	CS1
<b>GTIN</b>	00785901794387
<b>Nbr. of units in pkg.</b>	1
<b>Package weight(Lbs)</b>	5.12 oz (145.15 g)
<b>Returnability</b>	No
<b>Country of origin</b>	MX

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Package 1 Height</b>	2.16 in (5.499 cm)
<b>Package 1 width</b>	3.66 in (9.299 cm)
<b>Package 1 Length</b>	2.24 in (5.7 cm)
<b>Unit Type of Package 2</b>	S01
<b>Number of Units in Package 2</b>	24
<b>Package 2 Weight</b>	8.01 lb(US) (3.633 kg)
<b>Package 2 Height</b>	5.91 in (15 cm)
<b>Package 2 width</b>	5.91 in (15 cm)
<b>Package 2 Length</b>	15.75 in (40 cm)


## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

Dimensions

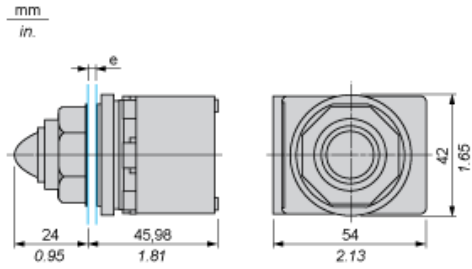

e panel thickness: 1 to 6 mm / 0.04 to 0.24 in.