Mentech 铭普光磁

CMC


RoHS

- RoHS Compliant.
- Surface Mount Device.
- Storage temperature: -40℃ to +125℃ .
- Operating temperature range: -40℃ to +125℃ (Including self temperature rise).


Electrical Specifications @25℃							
Part Number	OCL(uH MIN.) @100KHz,1V	OCL(uH MIN.) @100KHz,1V	DCR (mΩ max)	DCR (mΩ max)	Hi-pot		Irms(A)
	1-2	3-4	1-2	3-4	WDG-Core	WDG-WDG	100
CMB3229DG121U	140	140	0.4	0.4	500VDC 1mA,60S	500VDC 1mA,60S	

- The temperature rise current (Irms) is the current that caused a approx 72℃temperature rise from 25℃ ambient.

MECHANICAL DIMENSIONS (Unit:mm)

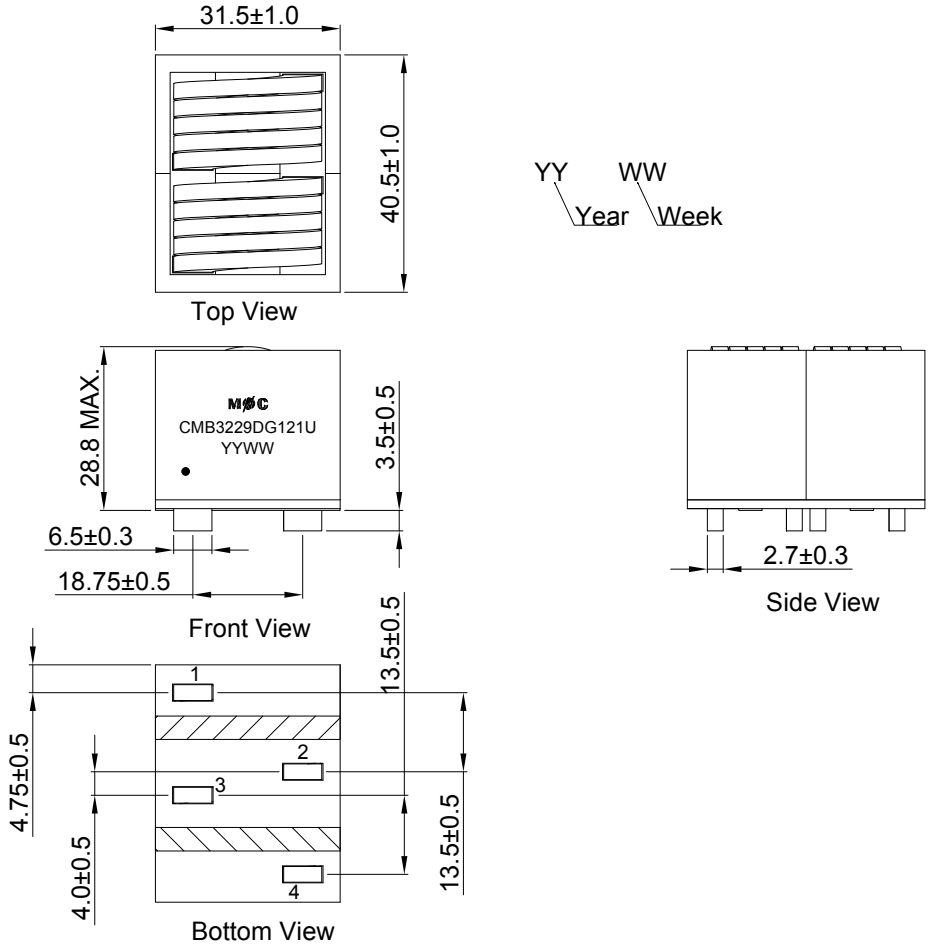

SCHEMATICS

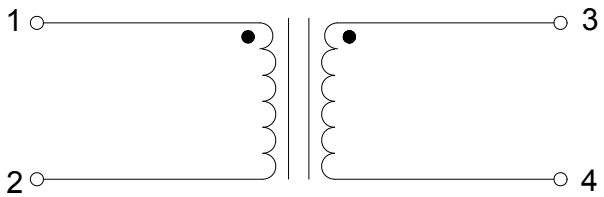

● Start Winding