Features

LED DRIVER

- 12W AC/DC LED Power Supply
- 350mA or 700mA Constant Current Output
- Drives 1 - 10 High Brightness LEDs
- Universal AC Input
- Active Power Factor Corrected >0.95
- Fused Input, Protected Output
- 3kVAC Input/Output Isolation
- Output Socket Connector
- UL-8750 Certified
- Low Cost
- 5 Year Warranty

Description

A compact 12W constant current switching power module suitable for driving up to ten high power LEDs (Vf = 3.6V). The output current is fixed at 350mA, 500mA or 700mA. Active power factor correction is standard and the converters are UL8750 certified for use with LED assemblies. The driver modules features both screw terminal and socket output connections. The socket connecter avoids the possibility of miswiring and damaging the LED load if the LEDs are pre-assembled into a wiring harness or lamp fitting.

Selection Guide

Part Number	Nominal Input Voltage (VAC)	Input Current at 230VAC (mA)	Output Voltage Range (VDC)	Output Current (mA)	Max # LEDs
RACD12-350	universal	200	3-36	350	10 x 1W
RACD12-700	universal	200	3-15	700	4 x 2W, 8 x 1W

Specifications (typical at 25°C and after warm up time unless otherwise specified)

Input Voltage Range		90VAC-264VAC
Rated Power		12 Watts max.
Input Frequency Range		47-63 Hz
Power Factor	Full Load, 115VAC/230VAC	0.95
Output Voltage Range	350mA Version 700mA Version	3 - 36VDC 3-15VDC
Inrush Current (<2mS)	115VAC/230VAC	10A max.
Input Current	230VAC, Full Load	200mA max.
Leakage Current	115VAC/240VAC - 60/50Hz	0.5mA typ.
Input Fuse	Standard	T1A
Output Current Accuracy	(combined Tolerance, Load Regulation and Line Regulation)	±10%.
Minimum Load	Open Circuit Protected	1 LED
Output Ripple		150mA max.
Hold Up Time		18ms min.
Operating Frequency		50-120kHz typ.
Efficiency at Full Load		78%
RMS Isolation Voltage (input to output)		3kVAC / 1 minute
Temperature Coefficient		±0.02%/°C typ.
Overload Protection		120% typ.
Short Circuit Protection		Continuous Current Limit
Output Overvoltage Protection	350mA Version 700mA Version	36V Zener Diode Clamp 15V Zener Diode Clamp

continued on next page

LIGHTLINE
AC/DC-Converter

RECOM

12 Watt PFC Single Output



RoHS 2002/95/EC 6/6

E340696

UL-8750 Certified

RACD12


Please Read Application Notes

Specifications cont. (typical at 25°C and after warm up time unless otherwise specified)

Overtemperature Protection		Shutdown, Automatic restart after cooling down
Operating Temperature Range	Ambient Temperature	-20°C to +50°C
(free air convection)	Case Temperature	85°C max.
Weight		100g
Packing Quantity		1pc
Storage Temperature Range		-40°C to +100°C
Humidity		95% RH max.
IPRating		IP20
PCB Material		Plastic Resin with Fibreglass (UL94V-0)
Case Material		Plastic
Designed to meet Standards	Lamp Control Gear, General Safety	EN 61347-1
	Lamp Control Gear for LED Modules	EN 61347-2-13
	Electrical Lighting, EMC Emissions	EN55015
	Limits for Harmonics Emissions	EN 61000-3-2
	EMC Compatibilty: Flicker and Voltage Variations	EN 61000-3-3
	Electrical Lighting: EMC Immunity	EN 61547
	Class II Power Supply Safety	UL1310
THD		<20%
Certifications	LED Lighting Safety	UL8750
Design Lifetime	25°C ambient	>70 x 10^3 hours in operation
Connections	AC Input	Screw terminal
	LED Output	Screw Terminal
	LED Output	5.5mm Socket with 2mm Pin (Suitable matching plug Switchcraft S760 or similar)

Package Style and Pinning

3rd angle projection

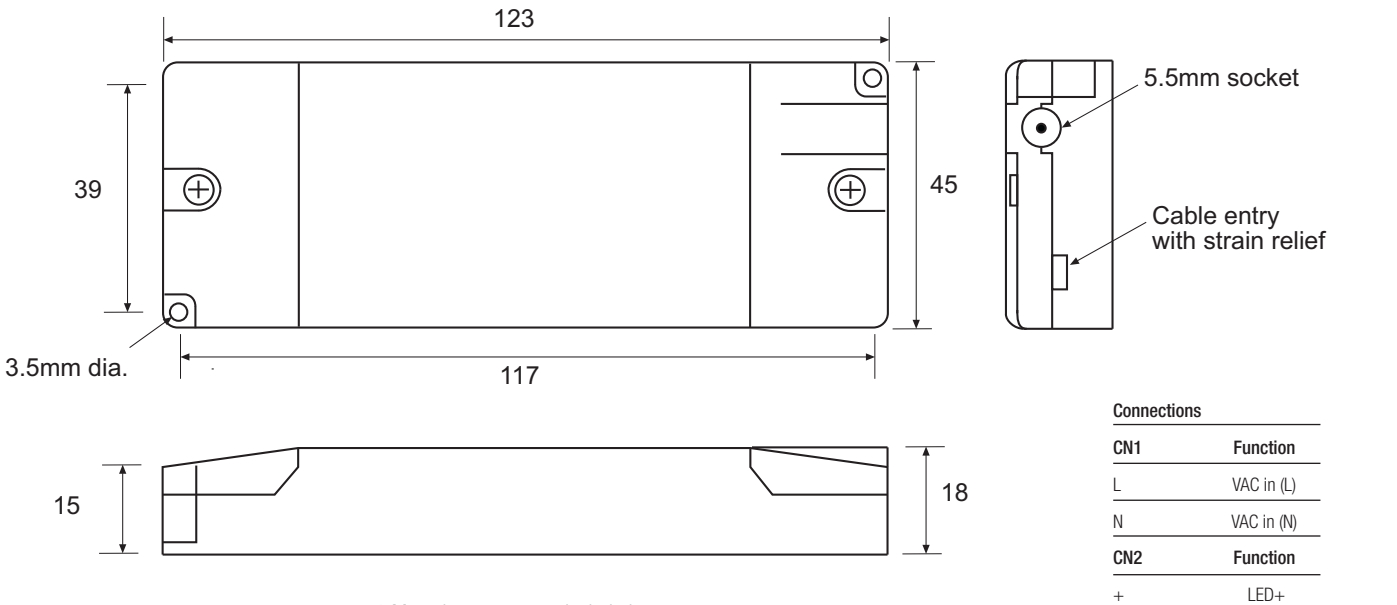

2 Mounting screws are included

Connections	
CN1	**Function**
L	VAC in (L)
N	VAC in (N)
CN2	**Function**
+	LED+
-	LED-
5.5mm Socket	**Function**
Pin	LED+
Shell	LED-