

AZ7709

SPST SUBMINIATURE POWER RELAY

FEATURES

- 4 kV dielectric strength
- Proof tracking index (PTI/CTI) 250
- 5 Amp switching capability (version "T" 10 Amp)
- Epoxy sealed version available
- Class F insulation available
- UL, CUR file E365652
- TUV B140171811019



CONTACTS

Arrangement	SPST (1 Form A)
Ratings	Resistive load: Max. switched power: 150 W or 1250 VA (Version "T": 300 W or 2500 VA) Max. switched current: 5 A (Version "T": 10 A) Max. switched voltage: 30* VDC or 250 VAC *Note: If switching voltage is greater than 30VDC, special precautions must be taken. Please contact the factory.
Rated Load UL, CUR	Standard Coil 5 A at 250 VAC, Res., 100k cycles, 85°C 5 A at 30 VDC, Res., 100k cycles, 85°C 1/6 HP, 125 / 250 VAC, 100k cycles, 85°C Sensitive Coil 3 A at 250 VAC, Res., 100k cycles, 85°C 3 A at 30 VDC, Res., 100k cycles, 85°C "T" High Current Version: Standard Coil 10 A at 250 VAC, Res., 100k cycles, 85°C 10 A at 30 VDC, Res., 100k cycles, 85°C 1/6 HP, 125 / 250 VAC, 100k cycles, 85°C Sensitive Coil 8 A at 250 VAC, Res., 100k cycles, 85°C 8 A at 30 VDC, Res., 100k cycles, 85°C
TÜV	Standard Coil 5 A at 250 VAC / 30 VDC, Res., 100k cycles 10 A at 250 VAC / 30 VDC, Res., 100k cycles ("T" Ver.) Sensitive Coil 3 A at 250 VAC / 30 VDC, Res., 100k cycles 8 A at 250 VAC / 30 VDC, Res., 100k cycles ("T" Ver.)
Material	Silver Cadmium, Silver Tin Oxide, Silver Alloy
Resistance	<100 milliohms initially (24 V, 1 A voltage drop method)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁷ 1 x 10 ⁵
Operate Time (typical)	8 ms at nominal coil voltage
Release Time (typical)	4 ms at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	4000 Vrms coil to contact 1000 Vrms between open contacts
Insulation Resistance	1000 megohms min. at 20°C 500 VDC 50% RH
Dropout	Greater than 5% of nominal coil voltage
Ambient Temperature Operating	At nominal coil voltage -30°C (-22°F) to 60°C (140°F) Standard Coil -30°C (-22°F) to 80°C (176°F) Sensitive Coil
Storage	-30°C (-22°F) to 105°C (221°F)
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	6 grams

COIL

Power At Pickup Voltage (typical) Max. Continuous Dissipation Temperature Rise	.220 W standard .113 W sensitive .760 W at 20°C (68°F) ambient 41°C (74°F) at nominal coil voltage, standard 22°C (40°F) at nominal coil voltage, sensitive
Temperature	Max. 105°C (221°F) Max. 155°C (311°F) class F

AMERICAN ZETTLER, INC. www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

AZ7709


RELAY ORDERING DATA

STANDARD RELAY				
COIL SPECIFICATIONS				ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance	Form A (SPST)
3	2.1	3.9	20 ± 10%	AZ7709-1A-3D
5	3.5	6.5	55 ± 10%	AZ7709-1A-5D
6	4.2	7.8	80 ± 10%	AZ7709-1A-6D
9	6.3	11.7	180 ± 10%	AZ7709-1A-9D
12	8.4	15.6	320 ± 10%	AZ7709-1A-12D
18	12.6	23.4	720 ± 10%	AZ7709-1A-18D
24	16.8	31.2	1,280 ± 10%	AZ7709-1A-24D
48	33.6	62.4	5120 ± 15%	AZ7709-1A-48D

SENSITIVE RELAY				
COIL SPECIFICATIONS				ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance	Form A (SPST)
3	2.25	3.9	45 ± 10%	AZ7709-1A-3DS
5	3.75	6.5	125 ± 10%	AZ7709-1A-5DS
6	4.5	7.8	180 ± 10%	AZ7709-1A-6DS
9	6.75	11.7	400 ± 10%	AZ7709-1A-9DS
12	9.0	15.6	720 ± 10%	AZ7709-1A-12DS
18	13.5	23.4	1620 ± 10%	AZ7709-1A-18DS
24	18.0	31.2	2800 ± 10%	AZ7709-1A-24DS

*Add suffix "T" to AZ7709 for high current version. Add suffix "B" to "1A" for silver contacts. Add suffix "E" to "1A" for silver tin oxide contacts. Add suffix "E" for epoxy sealed version. Add suffix "G" for gold plated contacts. Add suffix "F" for class F insulation.

MECHANICAL DATA

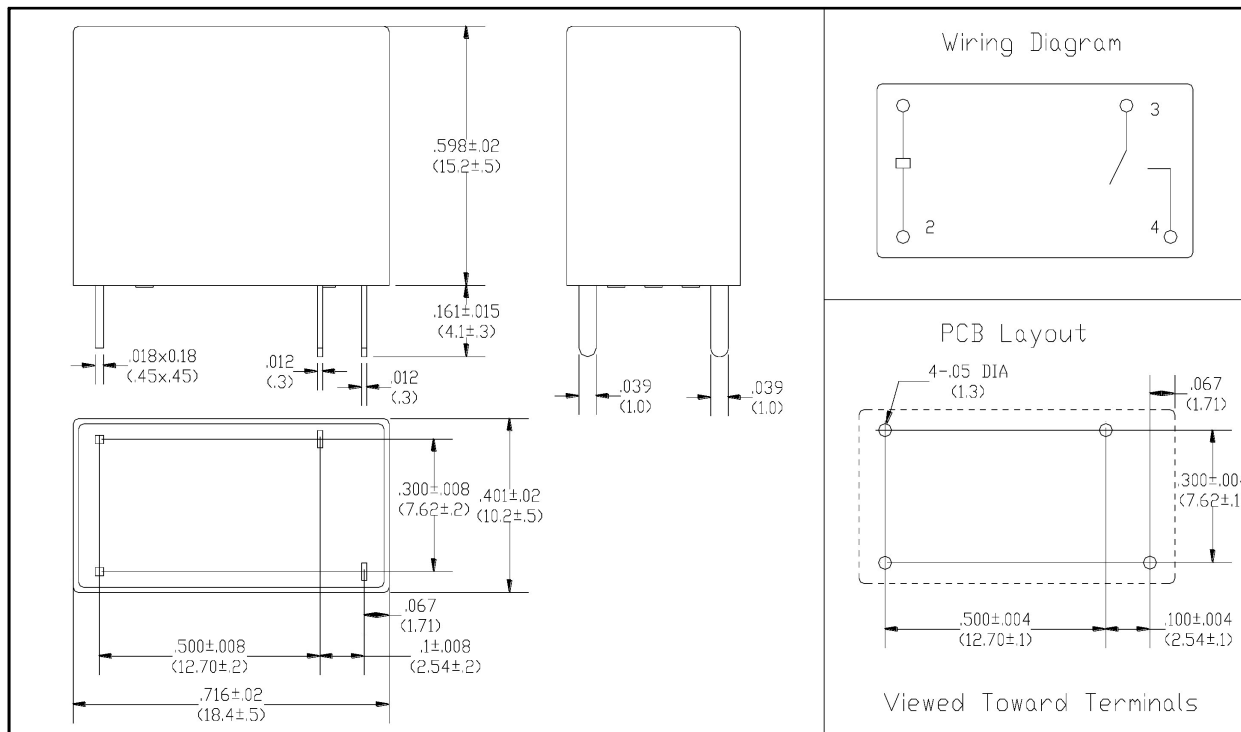

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

AMERICAN ZETTLER, INC. www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM