
TO-220F 3A Triac

TM341S-L, TM361S-L

■Features

- ●Repetitive peak off-state voltage: V_{DRM}=400, 600V
- ●Rms on-state current: $I_{T(RMS)}$=3A
- ●Gate trigger current: I_{GT}=20mA max (MODE Ⅰ, Ⅱ, Ⅲ)
- ●Isolation voltage: V_{ISO}=1500V(50Hz Sine wave, RMS)
- ●UL approved type available

External Dimensions
(Unit: mm)

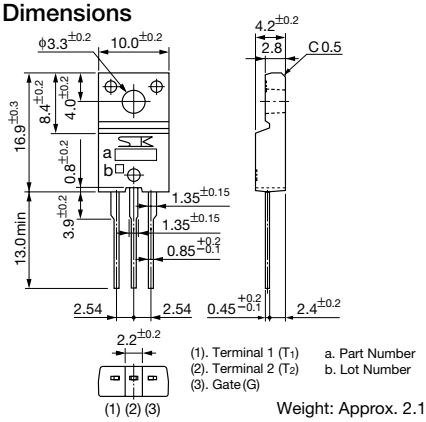

Weight: Approx. 2.1g

■Absolute Maximum Ratings


Parameter	Symbol	Ratings		Unit	Conditions
		TM341S-L	TM361S-L		
Repetitive peak off-state voltage	V_{DRM}	400	600	V	
RMS on-state current	$I_{T(RMS)}$	3.0		A	Conduction angle 360°, Tc=109°C
Surge on-state current	I_{TSM}	30		A	50Hz full-cycle sinewave, Peak value, Non-repetitive, Tj=125°C
Peak gate voltage	V_{GM}	6		V	
Peak gate current	I_{GM}	0.5		A	
Peak gate power loss	P_{GM}	3		W	
Average gate power loss	$P_{G(AV)}$	0.3		W	
Junction temperature	Tj	−40 to +125		°C	
Storage temperature	Tstg	−40 to +125		°C	
Isolation voltage	V_{ISO}	1500		Vrms	50Hz Sine wave, RMS, Terminal to Case, 1 min.

■Electrical Characteristics


(Tj=25°C, unless otherwise specified)

Parameter		Symbol	Ratings			Unit	Conditions	
			min	typ	max			
Off-state current		I_{DRM}		0.3	2.0	mA	V_D=V_{DRM}, R_{GK}=∞, Tj=125°C	
					0.1		V_D=V_{DRM}, R_{GK}=∞, Tj=25°C	
On-state voltage		V_{TM}			1.6	V	Pulse test, I_{TM}=5A	
Gate trigger voltage	Ⅰ	V_{GT}		0.7	2.0	V	V_D=6V, R_L=10Ω, T_C=25°C	T_2^+, G^+
	Ⅱ			0.7	2.0			T_2^+, G^-
	Ⅲ			0.8	2.0			T_2^-, G^-
	Ⅳ			0.8				T_2^-, G^+
Gate trigger current	Ⅰ	I_{GT}		8	20	mA	V_D=6V, R_L=10Ω, T_C=25°C	T_2^+, G^+
	Ⅱ			10	20			T_2^+, G^-
	Ⅲ			12	20			T_2^-, G^-
	Ⅳ			15				T_2^-, G^+
Gate non-trigger voltage		V_{GD}	0.2			V	V_D=1/2×V_{DRM}, Tj=125°C	
Holding current		I_H		10		mA	V_D=6V	
Thermal resistance		Rth			5.0	°C/W	Junction to case	


$v_T - i_T$ Characteristics (max)




I_{TSM} Ratings




Gate Characteristics




$I_{T(RMS)} - P_{T(AV)}$ Characteristics




$I_{T(RMS)} - T_C$ Ratings



$I_{T(RMS)} - T_a$ Ratings




I_H temperature Characteristics (Typical)




Pulse trigger temperature Characteristics v_{gt} (Typical)


(MODE－Ⅰ)



(MODE－Ⅱ)




(MODE－Ⅲ)




Pulse trigger temperature Characteristics i_{gt} (Typical)


(MODE－Ⅰ)




(MODE－Ⅱ)




(MODE－Ⅲ)



V_{GT} temperature characteristics (Typical)



I_{GT} temperature characteristics (Typical)



Transient thermal resistance Characteristics

