

## Housing - HC-B 10-TFQ-N-O1M20S - 1460253

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

HEAVYCON B10 sleeve housing, for double locking latch, height: 56 mm, with 1 x M20 gland, lateral cable outlet



### Key commercial data

|                      |          |
|----------------------|----------|
| Packing unit         | 1 pc     |
| Custom tariff number | 85389099 |
| Country of origin    | Germany  |

### Technical data

#### Dimensions

|        |       |
|--------|-------|
| Height | 56 mm |
| Width  | 43 mm |
| Length | 73 mm |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|

#### General

|                              |                                                  |
|------------------------------|--------------------------------------------------|
| Note                         | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design                       | B10                                              |
| Housing type                 | Sleeve housings                                  |
| Locking type                 | For double locking latch                         |
| No. of cable exits           | 1                                                |
| Cable exit                   | Lateral                                          |
| Screw connection             | None                                             |
| Type of the screw connection | 1x M20                                           |
| Housing material             | Aluminum die-cast                                |
| Housing surface material     | Powder-coated, gray                              |

## Housing - HC-B 10-TFQ-N-O1M20S - 1460253

### Technical data

#### General

|                       |                                     |
|-----------------------|-------------------------------------|
| Assembly instructions | For half and full screw connections |
|-----------------------|-------------------------------------|

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27140816 |
| eCl@ss 5.0 | 27143424 |
| eCl@ss 5.1 | 27143424 |
| eCl@ss 6.0 | 27143424 |
| eCl@ss 7.0 | 27440209 |
| eCl@ss 8.0 | 27440209 |

#### ETIM


|          |          |
|----------|----------|
| ETIM 3.0 | EC000437 |
| ETIM 4.0 | EC000437 |
| ETIM 5.0 | EC000437 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31261502 |
| UNSPSC 7.0901 | 31261502 |
| UNSPSC 11     | 31261502 |
| UNSPSC 12.01  | 31261502 |
| UNSPSC 13.2   | 31261502 |

### Drawings

#### Dimensioned drawing

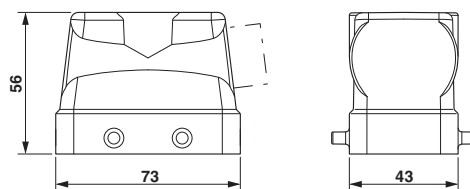

#### Dimensional drawing

