
1.0 Amps, 800 Volts
N-CHANNEL POWER MOSFET

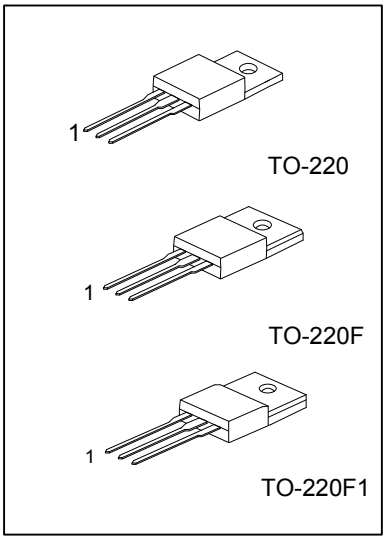

■ DESCRIPTION


The UTC **1N80** is an N-channel mode Power FET using UTC's advanced technology to provide costomers with planar stripe and DMOS technology. This technology specializes in allowing a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **1N80** is universally applied in high efficiency switch mode power supply.

■ FEATURES

* 1.0A, 800V, $R_{DS(on)}$=12Ω @V_{GS} =10V
* High switching speed
* Improved dv/dt capability
* 100% avalanche tested

■ SYMBOL



■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
1N80L-TA3-T	1N80G-TA3-T	TO-220	G	D	S	Tube
1N80L-TF3-T	1N80G-TF3-T	TO-220F	G	D	S	Tube
1N80L-TF1-T	1N80G-TF1-T	TO-220F1	G	D	S	Tube

Note: Pin Assignment: G: Gate D: Drain S: Source

1N80L - TA3 - T (1) Packing Type (2) Package Type (3) Lead Free	(1) T: Tube (2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1 (3) G: Halogen Free, L: Lead Free

Copyright © 2010 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS (T_C=25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	800	V
Gate-Source Voltage		V_{GSS}	±30	V
Avalanche Current (Note 1)		I_{AR}	1.0	A
Drain Current	Continuous	I_D	1.0	A
	Pulsed (Note 1)	I_{DM}	4.0	A
Avalanche Energy	Single Pulsed (Note 2)	E_{AS}	90	mJ
	Repetitive (Note 1)	E_{AR}	4.5	mJ
Peak Diode Recovery dv/dt (Note 3)		dv/dt	4.0	V/ns
Power Dissipation	TO-220	P_D	39	W
	TO-220F/TO-220F1		23	W
Junction Temperature		T_J	+150	°C
Storage Temperature		T_{STG}	-55~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220	θ_{JA}	62.5	°C/W
	TO-220F/TO-220F1		62.5	°C/W
Junction to Case	TO-220	θ_{JC}	3.13	°C/W
	TO-220F/TO-220F1		5.35	°C/W


■ ELECTRICAL CHARACTERISTICS (T_C=25°C, unless otherwise specified)


PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	V_{GS}=0V, I_D=250μA	800			V
Breakdown Voltage Temperature Coefficient		$\Delta BV_{DSS}/\Delta T_J$	I_D=250μA, Referenced to 25°C		1.0		V/°C
Drain-Source Leakage Current		I_{DSS}	V_{DS}=800V, V_{GS}=0V			10	μA
			V_{DS}=640V, T_C=125°C			100	μA
Gate-Source Leakage Current	Forward	I_{GSS}	V_{DS}=0V ,V_{GS}=30V			100	nA
	Reverse		V_{DS}=0V ,V_{GS}=-30V			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS}=V_{GS}, I_D=250μA	3.0		5.0	V
Drain-Source On-State Resistance		$R_{DS(ON)}$	V_{GS}=10V, I_D=0.5A		10.3	12.0	Ω
Forward Transconductance		g_{FS}	V_{DS}=50V, I_D=0.5A (Note 4)		0.75		S
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	V_{DS}=25V,V_{GS}=0V,f=1.0MHz		150	195	pF
Output Capacitance		C_{OSS}			20	26	pF
Reverse Transfer Capacitance		C_{RSS}			2.7	3.5	pF
SWITCHING PARAMETERS							
Total Gate Charge		Q_G	V_{DS}=640V, V_{GS}=10V, I_D=1.0A (Note 4,5)		5.5	7.2	nC
Gate-Source Charge		Q_{GS}			1.1		nC
Gate-Drain Charge		Q_{GD}			3.3		nC
Turn-ON Delay Time		$t_{D(ON)}$	V_{DD}=400V, I_D=1.0A, R_G=25Ω (Note 4,5)		10	30	ns
Turn-ON Rise Time		t_R			25	60	ns
Turn-OFF Delay Time		$t_{D(OFF)}$			15	40	ns
Turn-OFF Fall Time		t_F			25	60	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I_S				1.0	A
Maximum Body-Diode Pulsed Current		I_{SM}				4.0	A
Drain-Source Diode Forward Voltage		V_{SD}	I_S =1.0A, V_{GS}=0V			1.4	V
Body Diode Reverse Recovery Time		t_{RR}	V_{GS}=0V, I_S=1.0A, dI_F/dt=100A/μs (Note 4)		300		ns
Body Diode Reverse Recovery Charge		Q_{RR}			0.6		μC


Note: 1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. L=170mH, I_{AS}=1.0A, V_{DD}= 50V, R_G=25Ω, Starting T_J=25°C
3. I_{SD} ≤1.0A, di/dt ≤200A/μs, V_{DD} ≤BV_{DSS}, Starting T_J=25°C
4. Pulse Test: Pulse width ≤ 300μs, Duty cycle ≤ 2%
5. Essentially independent of operating temperature


■ TEST CIRCUITS AND WAVEFORMS

Peak Diode Recovery dv/dt Test Circuit & Waveforms

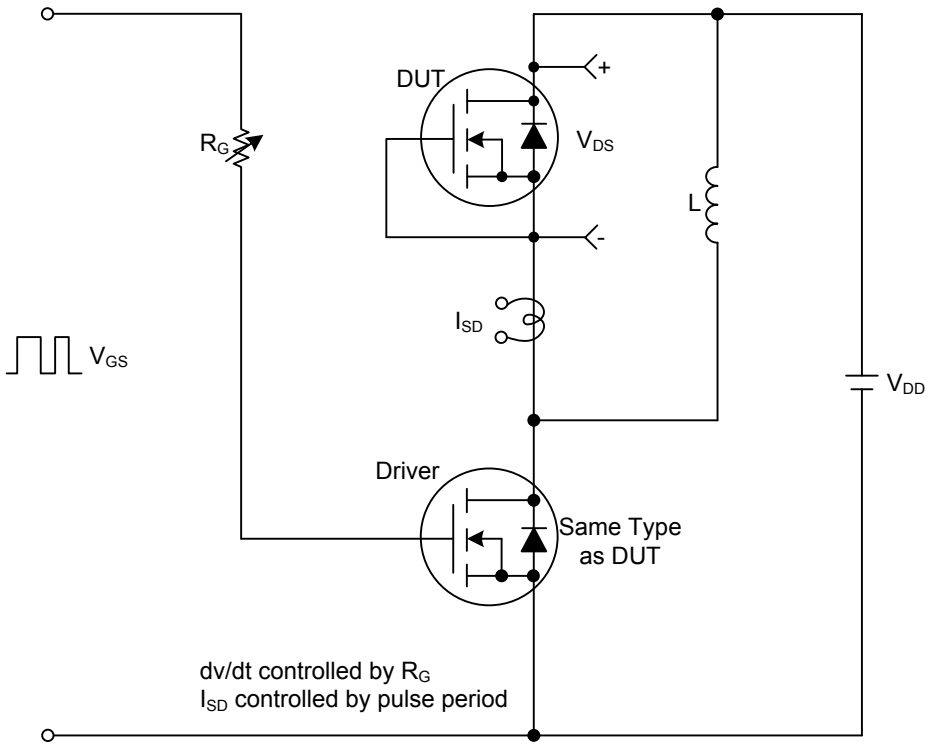


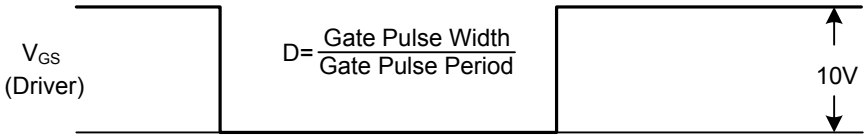

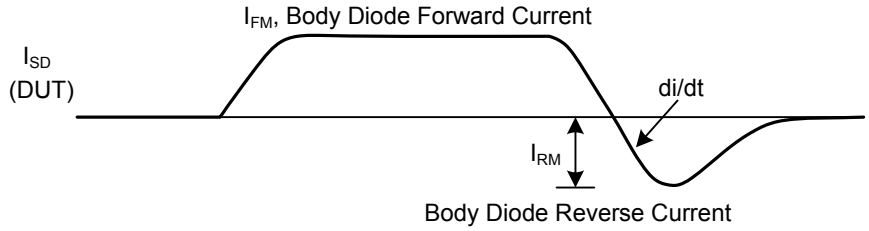


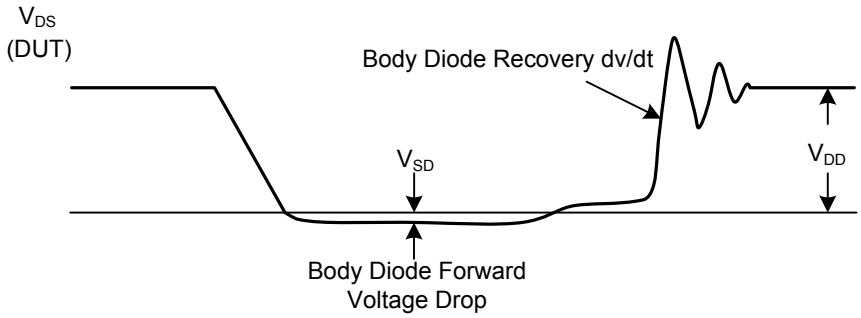


Gate Charge Test Circuit

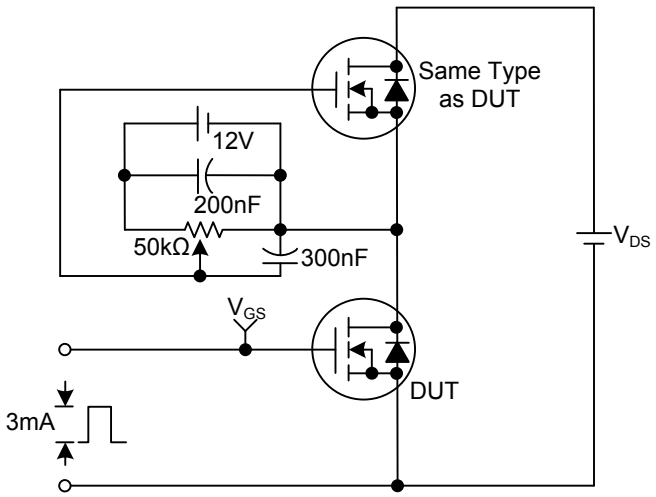


Gate Charge Waveforms

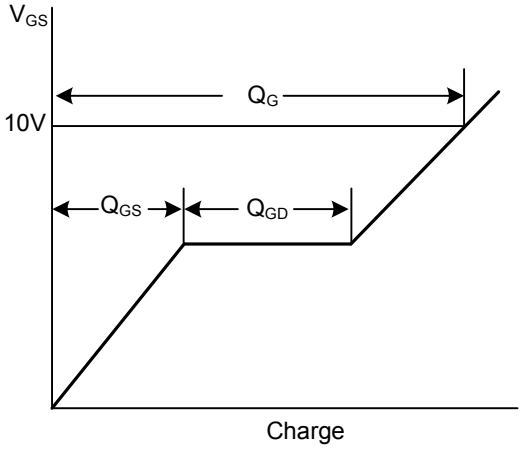


Resistive Switching Test Circuit

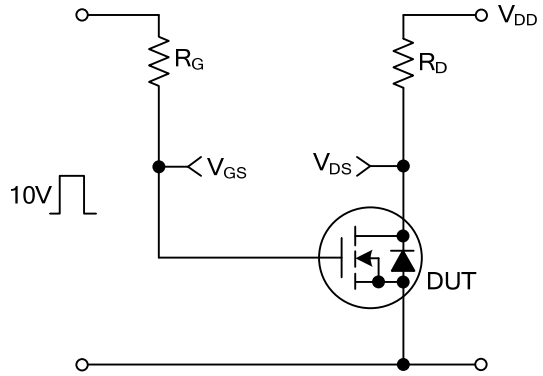

Resistive Switching Waveforms

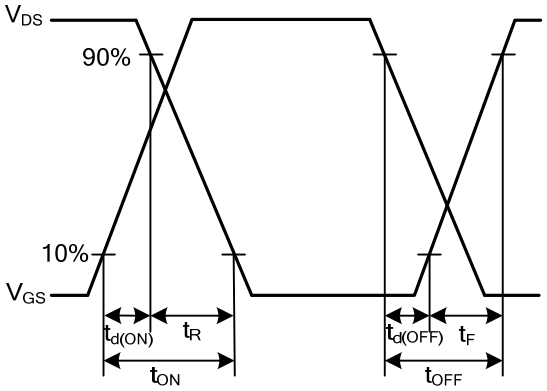


Unclamped Inductive Switching Test Circuit

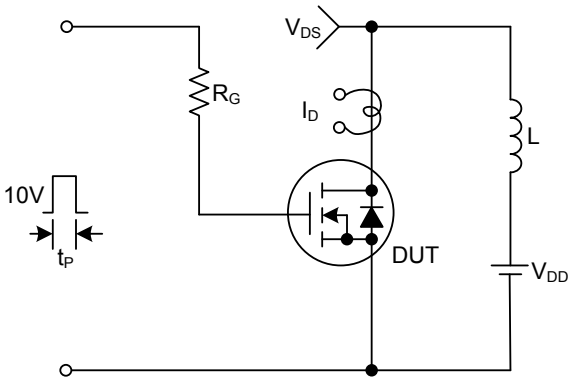

Unclamped Inductive Switching Waveforms

$$E_{AS}=\frac{1}{2}LI_{AS}^{2}\frac{BV_{DSS}}{BV_{DSS}-V_{DD}}$$

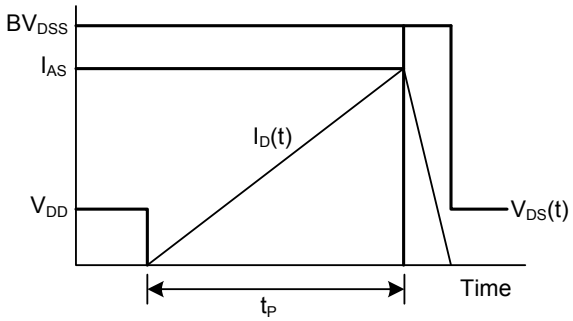

Copyright © 2010 Unisonic Technologies Co., Ltd

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.