

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16A 125VAC, 10A 250VAC cULus	
	20A 14VDC	
Configured For	12VDC 14V	
Contact Resistance	50m ohm Max.	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temp.	- 20°C ~ 85°C	
Switch Function	3P SPST ON-OFF Lamp Dependent	
Lamp Type	LED 12VDC 14V w/resistor	

Mounting Hole




Thickness:1.5~2.5

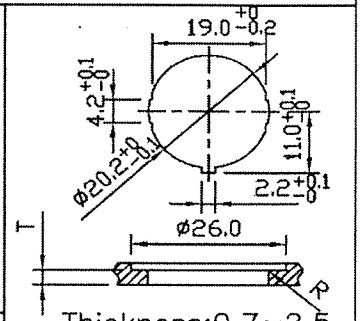



Thickness:0.7~2.5


Circuit Diagram

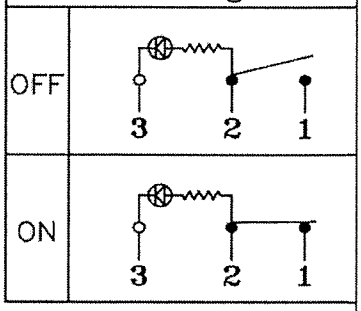



MATERIAL:
Frame: Black, Nylon 66 (94V-2)
Actuator: Red, PC (94V-2)
Waterproof rubber: Black, Silicone
Terminals: Silver plated, Copper alloy
Waterproof: IP65
LED:Red



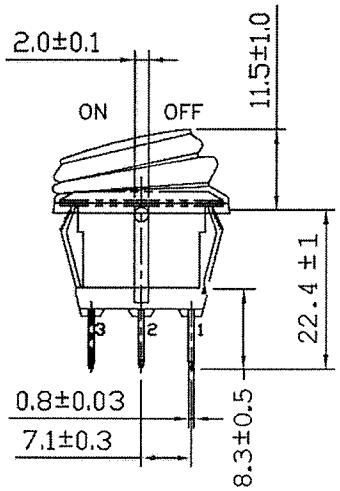

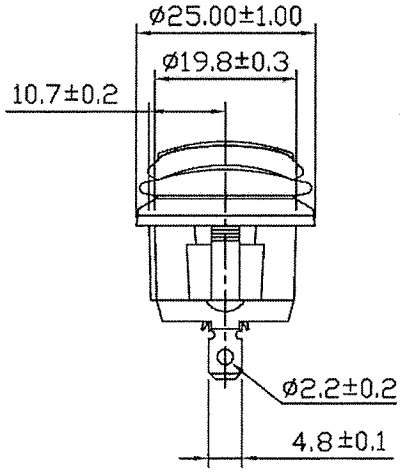



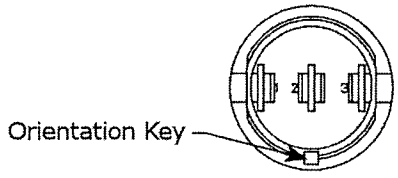

Tolerances Unless Otherwise Specified +/-0.3.

RoHS Compliant

2	Updated ratings and demensions. 3-5-2013.			
CW INDUSTRIES Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com	Date Drawn: 12/25/08	Rev. 2	Unit: mm	Checked By: G. Guld
	Title: ROCKER SWITCH			CW P/N: GRB112B802BR1