

ZTB SERIES
190kHz to 249kHz

ZTB Series 190kHz to 249kHz



Outline and Dimensions

Test Circuit

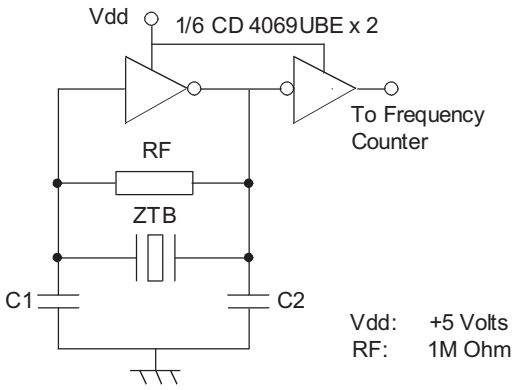


Electrical characteristics

Part Number	Frequency Range (kHz)	Frequency Accuracy at 25°C	Temperature Stability -20° to +80°C	Ageing Stability 10 years	Resonance Resistance (Ω) max.	C_1 (pF)	C_2 (pF)
ZTB ---D	190 to 249	±1.0kHz	±0.3%	±0.5%	20	330pF	470pF

(For ---- insert frequency)


ZTB SERIES
250kHz to 374kHz

ZTB Series 250kHz to 374kHz



Outline and Dimensions

Test Circuit

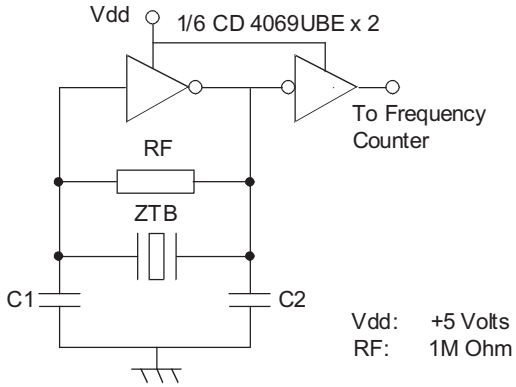

Electrical characteristics

Part Number	Frequency Range (kHz)	Frequency Accuracy at 25°C	Temperature Stability -20° to +80°C	Ageing Stability 10 years	Resonance Resistance (Ω) max.	C_1 (pF)	C_2 (pF)
ZTB ---D	250 to 374	±1.0kHz	±0.3%	±0.5%	20	220pF	470pF

(For ---- insert frequency)

EUROQUARTZ LIMITED Blacknell Lane CREWKERNE Somerset UK TA18 7HE
Tel: +44(0)1460 230000 Fax: +44(0)1460 230001 Email: sales@euroquartz.co.uk www.euroquartz.co.uk