
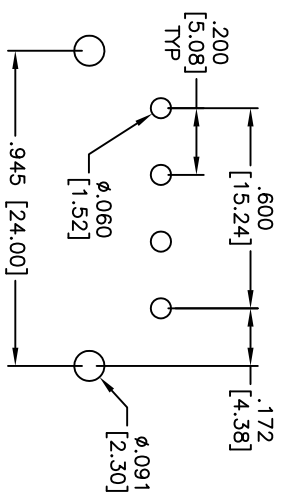
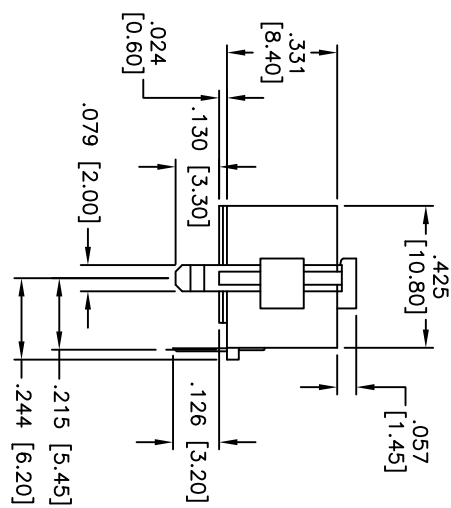
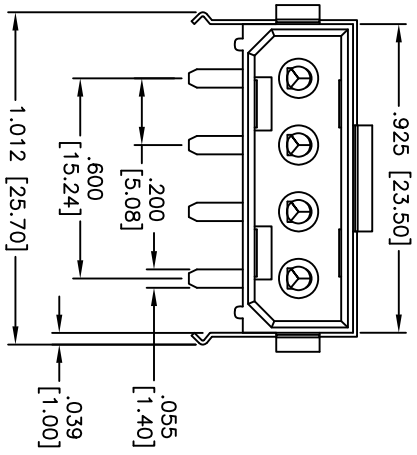


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/04/11	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

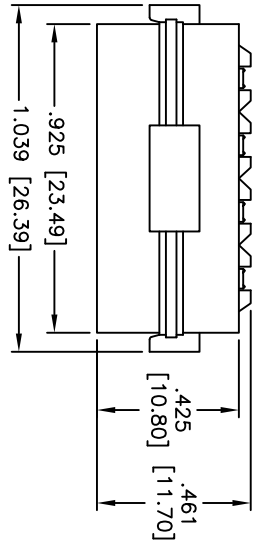

RECOMMENDED PCB LAYOUT

**SPECIFICATIONS:**

**Material:**  
 Insulator: Thermoplastic, Reinforced, rated UL 94V-2  
 Insulator color: Transparency  
 Contacts: Brass  
 Shell: Brass, Nickel plated  
**Plating:**  
 Tin over nickel underplate

**Electrical:**  
 Operation voltage: 250V AC  
 Current rating: 6.5A  
 Contact resistance: 10 mohms max  
 Insulation resistance: 500 mohms min.  
 Dielectric withstanding voltage: 1500 VAC for 1 minute  
**Temperature rating:**  
 Operating temperature: -40°C to +105°C

**Environmental:**  
 Lead Free, RoHS compliant  
 Recommended soldering temperature: 235°C for 5 seconds

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE		SIZE		PART NO.		REV.	
.200 [5.08] RIGHT ANGLE HEADER		X		DDR-04-NH-BL		-	
REF: S00723T		SCALE: NTS		SHEET 1 OF 1			