

CCT406393-600-36-00



Applications Industrial and Infrastructure

AC / DC AC

Status Production



Size	
Length(L)	56.00mm Max.
Width(W)	67.00mm Max.
Height(H)	96.00mm Max.
Internal Clamp Diameter	36.00mm Nom.
Detail Size Information	Please refer to the catalog



Electrical Characteristics	
Applicable Current [50/60Hz]	1 to 600Arms
Nominal Current Transformation Ratio	3000:1
Output Current Accuracy	200mA ±2mA
Phase Difference	0.35° ±0.2°
Secondary Winding Resistance	64Ω
Open-circuit Protection	7.5V clamp element
Withstanding Voltage [1min.]	2.2kVAC
Insulation Resistance [DC500V]	100MΩ Min.

Other	
Output Connector (Receptacle Housing)	SMR-02V-B (JST)
Adaptable Connector (Plug Housing)	SMP-02V (JST)
Output Lead Wire	AWG22 155mm
Flame Retardant Grade	UL 94 V-0
Operating Temp. Range	-20 to 60°C
Packing	Bulk(Polystyrene form)
Package Quantity	8pcs
Weight	535g

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.



Associated Images

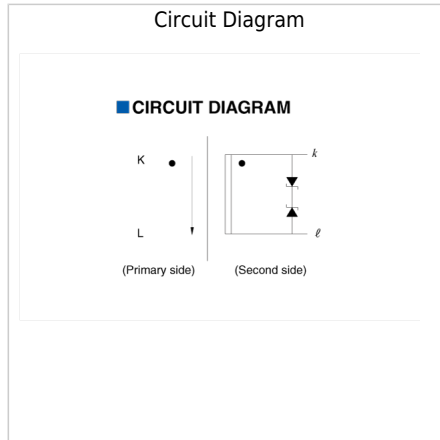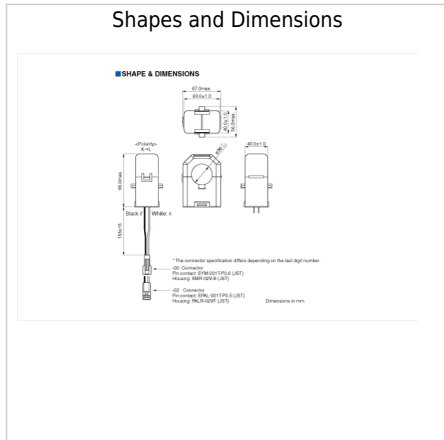

! Images are for reference only and show exemplary products.
! This PDF document was created based on the data listed on the TDK Corporation website.
! All specifications are subject to change without notice.