


Toroidal Transformer Data Sheet

30VA Open Style, with Leads.
 Dual 115V Primaries, Dual Secondaries

High quality open style toroidal transformers with dual 115V/50-60Hz primary windings. Twin secondary windings may be connected in series or parallel, or used independently

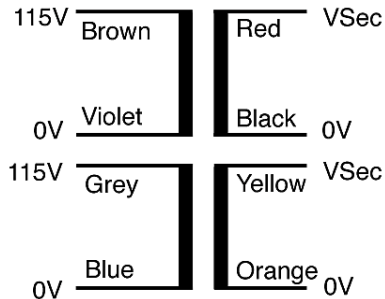

Primary 2x115V @ 50-60Hz
 Suitable for Series/Parallel connection

Secondary: 2 x Vsec @ 15VA Each
 Suitable for Series/Parallel connection



Nuvotem Part Number	Alternate Reference	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC Resistance [Ohms] @ 25°C	DEKRA Certificate
0030P2-2-006	91940-P2S2	2 x 6	2.500	2 x 7.17	2 x 0.2551	2161054.01
0030P2-2-009	91941-P2S2	2 x 9	1.667	2 x 10.65	2 x 0.5510	2161054.01
0030P2-2-012	91942-P2S2	2 x 12	1.250	2 x 14.19	2 x 0.9201	2161054.01
0030P2-2-015	91943-P2S2	2 x 15	1.000	2 x 17.74	2 x 1.4488	2161054.01
0030P2-2-018	91944-P2S2	2 x 18	0.833	2 x 21.44	2 x 2.2213	2161054.01
0030P2-2-025	91945-P2S2	2 x 25	0.600	2 x 29.75	2 x 4.2757	2161054.02

Primary Winding	Input Voltage Range :	Series: 207V–253V (230V±10%) @ 50/60Hz Parallel: 103.5V–126.5V (115V±10%) @ 50/60Hz
	DC Resistance @ 25°C =	Approx 46 Ohms each
Losses	Iron Losses	0.25 Watts approx
	Copper Losses	6.71 Watts approx.
Temperature Class	Winding Wire (Primary & Secondary)	Class H (180°C)
	Insulation between input and output	Class B (130°C)
	Connection lead insulation	Class A (105°C)
Standards	Approved to UL506 & UL5085 :	File E215495
	Approved to EN61558 :	DEKRA Certificates 2161054.01 or 2161054.02 (see table above)
	Conforms to EN60065, VDE0550, BS415.	
Physical Data	Approximate Dimensions	Diameter 70mm* Height 32mm
	Approximate Weight	0.45 Kg
		* Measured away from leadout bulge; Allow extra 4mm at leads.
Terminations	Primary	Flexible equipment wire UL Style 1569 (105°C), CSA Type TR-64 (90°C) Double-insulated over entire length with 105°C PVC tubings. 150mm Long, 10mm tinned ends.
	Secondary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.
Mounting Hardware	Each transformer is supplied with a mounting kit, comprising:	Neoprene Insulating disc 2 pieces Dished Steel Washer 1 piece