


EM60323

Embedded MicroBox for Mini ITX SBC

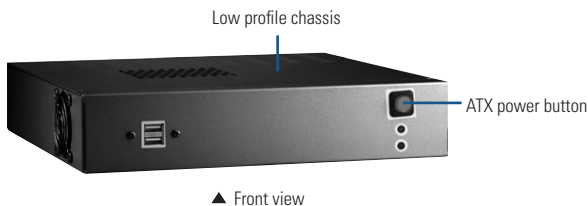

Specifications

Standard Color	Black
Construction	Heavy-duty cold-rolled steel
Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Front Panel I/O	1 x ATX power button 2 x USB 2.0
Rear Panel I/O	1 x Standard Mini ITX I/O bracket space
Expansion Interface	N/A
Drive Capacity	1 x 2.5" HDD
Cooling	1 x 40 x 40 mm system fan
Power Supply	ATX 180W Input: AC 115 ~ 230V Output: +3.3V @ 3A, +5V @ 16A, +12V @ 5.86A, -12V @ 0.8A, +5Vsb @ 2A ATX 250W Input: AC 115 ~ 230V Output: +3.3V @ 4A, +5V @ 6A, +12V @ 16.5A, -12V @ 0.4A, +5Vsb @ 1A
Dimensions	270 mm (10.63") (W) x 260 mm (10.24") (D) x 55 mm (2.17") (H)
Environment	EMI pre-scan meets EN55022 Class A

Applications

Wallmount PC controller
Embedded PC controller
Unattended controller
Compact industrial PC

Packing List

1 x 2.5" IDE flat cable, 1 x AC power cord

Features

- Designed for Mini ITX SBC
- One 2.5" HDD supported
- Optional 180W or 250W AC-in power supply
- Wall mount
- Slim design with 1 system fan



Ordering Information

Standard	
EM60323	Embedded MicroBox for Mini ITX SBC
SBC Options	
SBC86831/SBC86832/SBC86822/SBC86860/MANO860/MANO870	
Optional	
250W AC power supply 180W AC power supply	
*Specifications and certifications are based on options and may vary.	

Dimensions

