
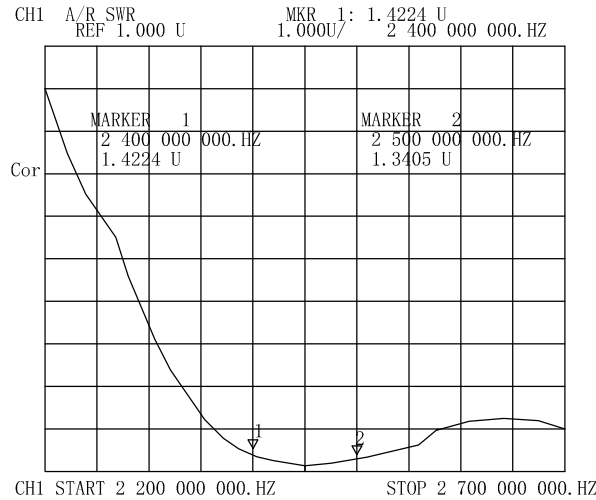


标注前有"\*"重点检验尺寸

# 型号: KH-FPC2.4G-1.13IPEX-100

图面产品均符合ROHS标准

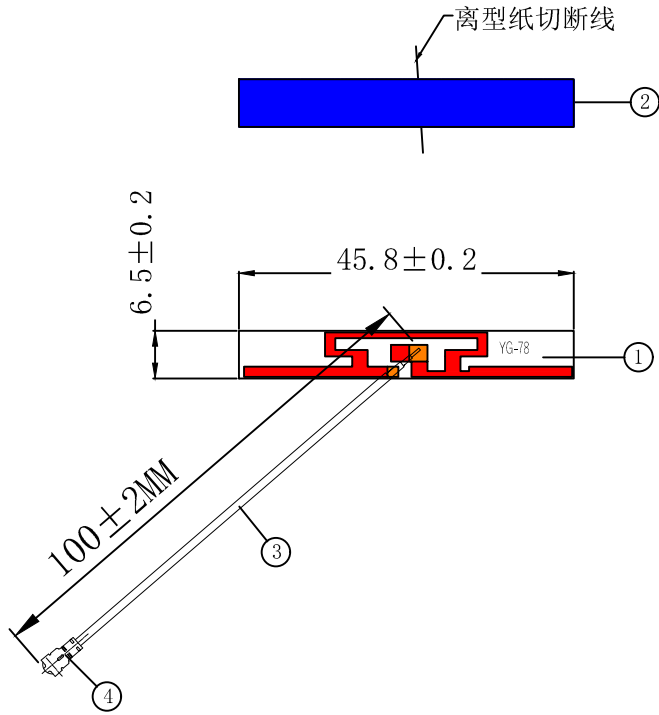


Performance parameters	
Product name	内置FPC天线
Model Type	KH-FPC2.4G-1.13IPEX-100
Frequency Range	2400-2500MHZ
Band Width	100MHZ
Vswr	≤2.0
Gain	2.0DBi
Impedance	50 OHM
Polarization	Horizontal polarization
Radiation	OMNIDIRECTIONAL
Max power	10 W
CABLE	RF-1.13-L=100MM
Connector	IPEX
Dimensions	45.8 mm *6.5 mm
Temperature	-35 °— 75°
Lighting protection	DC grounding

部件材质工艺说明:

序号	物料名称	产品描述	数量
①	Antenna element	FPC(IP)	1
②	Installation method	3M 300LSE	1
③	CABLE	RFφ1.13 COAXIAL CABLE 50ohm 灰	1
④	CONNECTOR	IPEX 一代	1

## 深圳市金航标电子有限公司

技术详询



公差	.x	±0.30	变更记录	日期	变更者	料号	编码	
	x.x	±0.20				品名	内置FPC天线	
图法	x.xx	±0.10	比例	单位	纸张	型号	KH-FPC2.4G-1.13IPEX-100	
	ANGULAR	@5~				绘图	日期	2020.06.30
	MM	A				审核	页码	1/1