

VI TELEFILTER

Preliminary specification

TFS 465D

1/5

Measurement condition

Ambient temperature: 23 °C
 Input power level: 0 dBm
 Terminating impedances:
 input: 50 Ω
 output: 50 Ω

Characteristics

Remark:

The maximum attenuation in the pass band is defined as the insertion loss a_e . The nominal frequency f_N is fixed at 465,0 MHz without any tolerance or limit. The values of absolute attenuation a_{abs} are guaranteed for the whole operating temperature range. The frequency shift of the filter in the operating temperature range is included in the production tolerance scheme.

D a t a		typ. value		tolerance/ Limit		
Insertion loss (within PB)		$a_e = a_{max}$	2,5 dB	max.	3,8	dB
Nominal frequency		f_N	-		465	MHz
Passband		PB	-	$f_N \pm$	2,5	MHz
Absolute attenuation (within OTR)						
300	kHz ...	452,5 MHz	52 dB	min.	48	dB
452,5	MHz ...	457,5 MHz	47 dB	min.	35	dB
Absolute attenuation (within temperatur range: +15° C ... 40° C)						
452,5	MHz ...	457,5 MHz	44 dB	min.	40	dB
480	MHz ...	485 MHz	43 dB	min.	30	dB
485	MHz ...	507,5 MHz	53 dB	min.	45	dB
507,5	MHz ...	1000 MHz	50 dB	min.	45	dB
1000	MHz ...	1200 MHz	45 dB	min.	40	dB
1200	MHz ...	1700 MHz	40 dB	min.	32	dB
1700	MHz ...	2000 MHz	27 dB	min.	20	dB
VSWR within PB at ambiente temperature			1,5:1	max.	2,1:1	
Temperature coefficient of frequency		TC_f^*	T.B.D. ppm/K		-	
Operating temperature range		OTR			-10 °C ... + 85 °C	
Storage temperature range					-30 °C ... + 85 °C	
Input power level			-	max.	25	dBm

*) $\Delta f_c(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_A) \times f_c(\text{MHz})$

generated :


checked / approved :

Tele Filter GmbH
 Potsdamer Straße 18
 D-14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: fft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Preliminary specification****TFS 465D****2/5****Construction, pin configuration**

(All dimensions in mm)

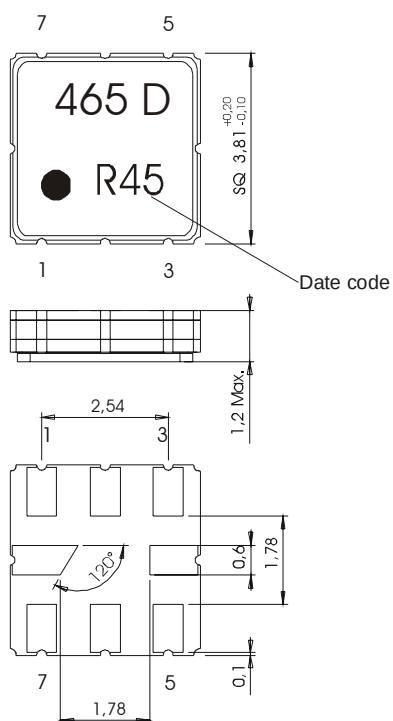

Date code: Year + week

N	2001
P	2002
R	2003
...	

Pin 1	Ground
Pin 2	Input
Pin 3	Ground
Pin 4	Ground
Pin 5	Ground
Pin 6	Output
Pin 7	Ground
Pin 8	Ground

Tele Filter GmbH
Potsdamer Straße 18
D-14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER

Preliminary specification

TFS 465D

3/5

Stability characteristics

After the following tests the filter shall meet the whole specification:

- Shock: 500g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
- Vibration: 10 Hz to 500 Hz, 0,35 mm or 5 g respectively, 1 octave per min, 10 cycles per plan, 3 plans;
DIN IEC 68 T2 - 6
- Change of temperature: -55 °C to 125°C / 30 min. each / 10 cycles
DIN IEC 68 part 2 – 14 Test N
- Resistance to solder heat (reflow): reflow possible: twice max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;


Packing

Tape & Reel: IEC 286 – 3, with exeption of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

max. pieces of filters peer reel:	3000
reel of empty components at start:	min. 300 mm
reel of empty components at start including leader:	min. 500 mm
trailer:	min. 300 mm


Tape (all dimensions in mm)

W : 12,00 ± 0,3
Po : 4,00 ± 0,1
Do : 1,50 +0,1/-0
E : 1,75 ± 0,1
F : 5,50 ± 0,05
G(min) : 0,75
P2 : 2,00 ± 0,05
P1 : 8,00 ± 0,1
D1(min) : 1,50
Ao : 4,30 ± 0,1
Bo : 4,30 ± 0,1
Ct : 9,5 ± 0,1

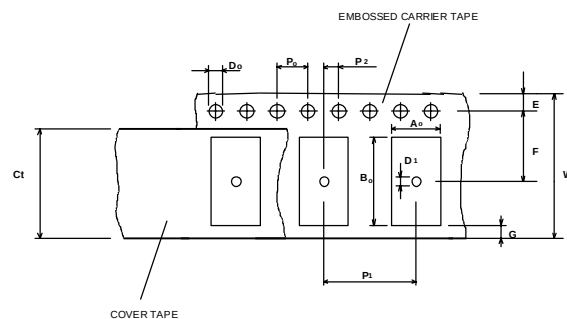

Reel (all dimensions in mm)

A : 330
W1 : 12,4 +2/-0
W2(max) : 18,4
N(min) : 50
C : 13,0 0,5/-0,2

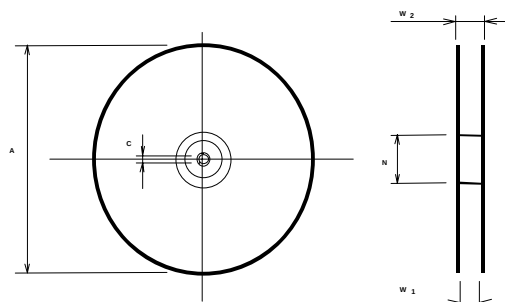

The minimum bending radius is 45 mm. The mounting surface of the filters faces the bottom side of the embossed carrier tape. Marking of the filters can be read if the upper side of the carrier tape is regarded with the sprocket holes on the right.

Tele Filter GmbH

Potsdamer Straße 18

D-14 513 TELTOW / Germany

Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30

E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Preliminary specification****TFS 465D****4/5****Air reflow temperature conditions**

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

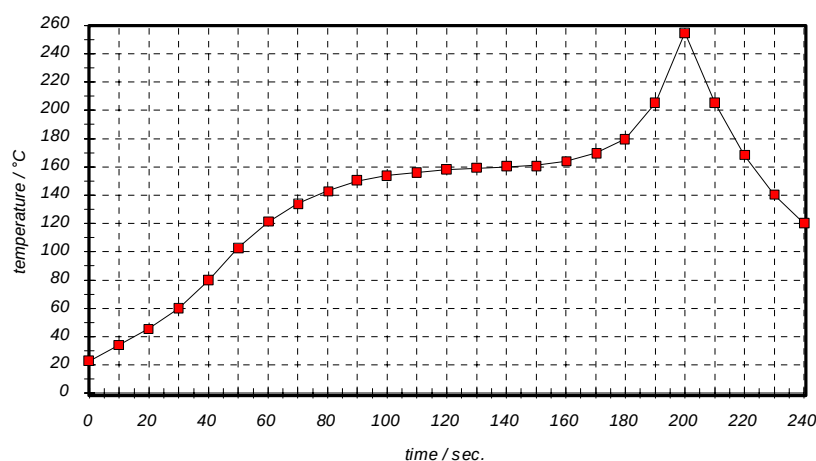
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

Tele Filter GmbH
Potsdamer Straße 18
D-14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

VI TELEFILTER**Preliminary specification****TFS 465D****5/5**

History

Version	Reason of Changes	Name	Date
1.0	- Generation of preliminary specification	Roizengaft	4.11.2003

Tele Filter GmbH
Potsdamer Straße 18
D-14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.