
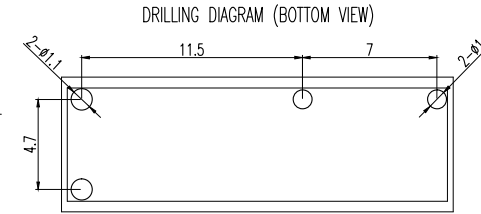
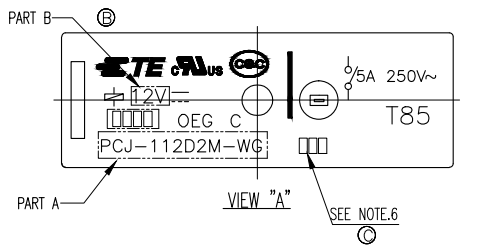
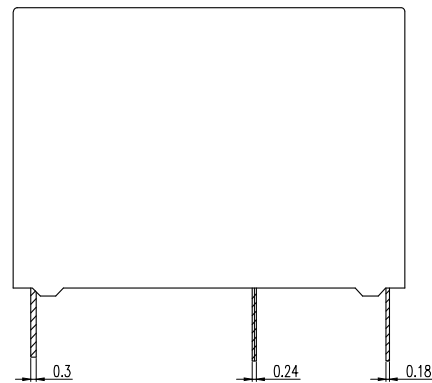


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
COPYRIGHT By TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC		DIST		REVISIONS			
HB		—		P	LTR	DESCRIPTION	DATE
							DWN
							APVD
				C1		CHANGE THE WIDTH OF THE TERMINAL FROM 0.6MM TO 0.8MM	E00-14-011875
							08-AUG-14
							Q.L
							B.F

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

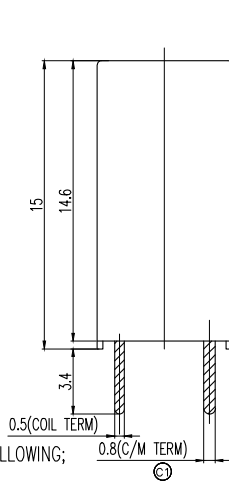

NOTE:

1. LOT NO. SYSTEM AS FOLLOWING;



- ② ONE CHARACTER DISTINGUISH THE LINE IDENTITY, SUCH AS: A, B...
- ③ TERMINAL DIMENSION IS BEFORE SOLDER DIP.
- ④ FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH, THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.
- ⑤ MARKING FROM INK CHANGE TO LASER
- ⑥ ADD LOT NO. SYSTEM AS FOLLOWING;



- I. DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
.....
7...SUNDAY IN THIS WEEK
- II. DIGITS FOR SHIFT OF THE DAY
1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;
- III. ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B,....Z

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±
MATERIAL	FINISH
—	—

DWN	ZHENXING.FU
CHK	N.FUNAYAMA
APVD	HSU,CHIEN-HUI
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—
CUSTOMER DRAWING	

TE Connectivity	
NAME	
PCJ-WG SPEC ,000	
SIZE	CAGE CODE
A3	00779
W	C=1721348
RESTRICTED TO	
—	
SCALE	5:1
SHEET	1 OF 2
REV	C1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

LOC
HB

DIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—	SEE SHEET 1	—	—	—

D

C

B

A

N	PCJ-12402MH-WG, 000	1-1721348-4	SEAL UP INSPECTION ON EVERY PRODUCT	24V	PCJ-12402MH-WG
M	PCJ-11802MH-WG, 000	1-1721348-3	SEAL UP INSPECTION ON EVERY PRODUCT	18V	PCJ-11802MH-WG
I	PCJ-11202MH-WG, 000	1-1721348-2	SEAL UP INSPECTION ON EVERY PRODUCT	12V	PCJ-11202MH-WG
k	PCJ-10902MH-WG, 000	1-1721348-1	SEAL UP INSPECTION ON EVERY PRODUCT	9V	PCJ-10902MH-WG
j	PCJ-10602MH-WG, 000	1-1721348-0	SEAL UP INSPECTION ON EVERY PRODUCT	6V	PCJ-10602MH-WG
i	PCJ-10502MH-WG, 000	1721348-9	SEAL UP INSPECTION ON EVERY PRODUCT	5V	PCJ-10502MH-WG
h	PCJ-10302MH-WG, 000	1721348-8	SEAL UP INSPECTION ON EVERY PRODUCT	3V	PCJ-10302MH-WG
g	PCJ-12402M-WG, 000	1721348-7		24V	PCJ-12402M-WG
f	PCJ-11802M-WG, 000	1721348-6		18V	PCJ-11802M-WG
e	PCJ-11202M-WG, 000	1721348-5		12V	PCJ-11202M-WG
d	PCJ-10902M-WG, 000	1721348-4		9V	PCJ-10902M-WG
c	PCJ-10602M-WG, 000	1721348-3		6V	PCJ-10602M-WG
b	PCJ-10502M-WG, 000	1721348-2		5V	PCJ-10502M-WG
a	PCJ-10302M-WG, 000	1721348-1		3V	PCJ-10302M-WG
No.	EC TYPE NAME	TE PART NO	DESCRIPTION	PART B	PART A

RELAY TYPE

		Sn-Ag-Cu	SOLDER	18
94V-0		PBT	CASE	17
		UV	SEAL(CASE) JUST FOR WASH TIGHT	16
		EPOXY	SEAL(CASE AND BASE)	15
		3UEW	MAGNETIC WIRE	14
94V-0		PBT	CARD	13
		Ag ALLOY	STATIONARY CONTACT	12
	SOLDER DIP	Cu ALLOY	STATIONARY TERMINAL	11
		Ag ALLOY	MOVABLE CONTACT	10
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	9
94V-0		PBT	BASE	8
		STAINLESS	HINGE SPRING	7
	NIP	STEEL	ARMATURE	6
	NIP	STEEL	CORE	5
	NIP	STEEL	YOKE	4
	SOLDER DIP	Cu ALLOY	COIL TERMINAL B	3
	SOLDER DIP	Cu ALLOY	COIL TERMINAL A	2
94V-0		PBT	BOBBIN	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±—
1 PLC ±—
2 PLC ±—
3 PLC ±—
4 RVC ±—
ANGLES ±—
FINISH —

MATERIAL
—

—

DWN
ZHENXING.FU

CHK
N.FUNAYAMA

APVD
HSU,CHIEN-HUI

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

NAME
PCJ-WG SPEC ,000

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=1721348

RESTRICTED TO
—

SCALE
5:1

SHEET
2 OF 2

REV
C1

1470-19 (3/11)