

106FXM063M

RADIAL LEAD LOW PROFILE

Parts are RoHS compliant

Date code when parts became RoHS: 15

APPLICATIONS: General Purpose, Bypass, coupling, Filtering, Handheld devices

ELECTRICAL SPECIFICATIONS

Capacitance: 10 uF
Dissipation Factor: 0.1 Max at 120 Hz and 20°C
Temperature Range: -55°C to +105°C
ESR: 16.579 Ohms Max at 20°C and 120 Hz
Impedance: N/A

Tolerance: -20 %, +20 %
WVDC: 63 Volts DC
SVDC: 79 Volts DC
Ripple Current: 50 mA at 120 Hz and 105°C
Impedance Ratios:-25°C/20°C 2 and -40°C/20°C - 3

Leakage Current: .03CV or 4uA, whichever is greater
18.9 uA after 1 Minute
.01CV or 3uA, whichever is greater
6.3uA after 2 Minutes

Load Life: 1000 hours at 105°C with 100 % of rated voltage and with 0 % of rated ripple current
Capacitance Change: ≤20% of initial measured value
Dissipation Factor: ≤200% of maximum specified value
Leakage Current: ≤100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.8	1	1.23	1.32	1.5	1.5


Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
2	1.9	1.7	1.8	1.4	1.4	1	0

PHYSICAL DIMENSIONS

Diameter (D): 5 mm + 0.5 mm
Length (L): 9 mm + 1.5 mm
Lead Spacing (S): 2 mm +/- 0.5 mm
Coating: BrownPET sleeving

Lead Wire Diameter (d): 0.5 mm +/- 0.05 mm
Lead Length: 15 mm +/- MIN mm
Lead Finish: Matte Tin

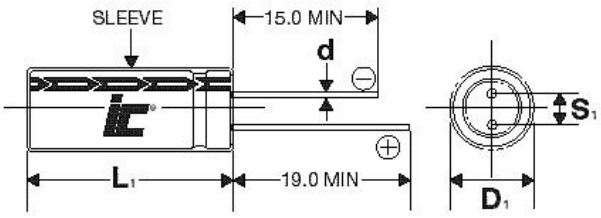

ILLINOIS CAPACITOR

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier, All Rights Reserved