



Microwave Limiting Amplifier

8 to 12 GHz

Model BXL9812

FEATURES

- Reverse Bias Protection
- Input Voltage Regulator
- Laser Sealed Housing

The Model BXL9812 is standard high frequency limiting amplifier covering 8 GHz to 12 GHz. This two stage design, utilizes an input voltage regulator to protect against fluctuations in supply voltage, reverse bias protection circuitry, and a laser sealed housing for the ultimate in environmental protection. This standard design may also be ordered in a screened MIL-STD-883 version as a model SXL9812. All specification ratings are based on measurements in a 50 ohm system with a DC supply voltage tolerance of +/- 2%.

Parameter	Typical	Min. / Max.
Frequency Range	8 to 12 GHz	8 to 12 GHz
Input Power	-	-20 dBm Min / -10 dBm Max.
Flatness (+/-)	1.0 dB	1.5 dB Max
P_{sat}	10 dBm	8 dBm Min / 11 dBm Max.
Input VSWR	1.8:1	2.0:1 Max.
Output VSWR	1.8:1	2.0:1 Max.
3rd Order Output Intercept Point	-	-
2nd Order Output Intercept Point	-	-
Noise Figure	5.0 dB	6.0 dB
Supply Voltage	+12 to +15 volts	+12 to +15 volts
Supply Current	165 mA	175 mA Max.
Revision: 6/6/2012	Typical values are measured at 25°C but not guaranteed.	
Housing Size	1.15" L x 1.75" W x 0.70" H	
RF Connectors	Gold Plated Pins or SMA Female	
Operating Case Temp. (Min./Max. Values)	25°C to +75°C	

Maximum (No Damage) Ratings

Storage Temperature	-65°C to +125°C
Operating Temperature (Case)	-40°C to +85°C
DC Voltage @ 25°C (Regulated)	+17 VDC
Input Drive @ 25°C (CW)	+20 dBm


1. MATERIAL: ALUMINUM NICKEL PLATED

REV	REV	1		
1	0	1	P1	
REVISIONS				
ECN	REV.	DESCRIPTION	CHG/DATE	APPROV/DAT
XXX	P1	PRELIMINARY RELEASE	20 12/05/02	



CAUTION

THIS ASSEMBLY CONTAINS PARTS SENSITIVE
TO DAMAGE BY ELECTROSTATIC DISCHARGE (ESD).
USE ESD PRECAUTIONARY PROCEDURES WHEN
TOUCHING, REMOVING OR INSERTING

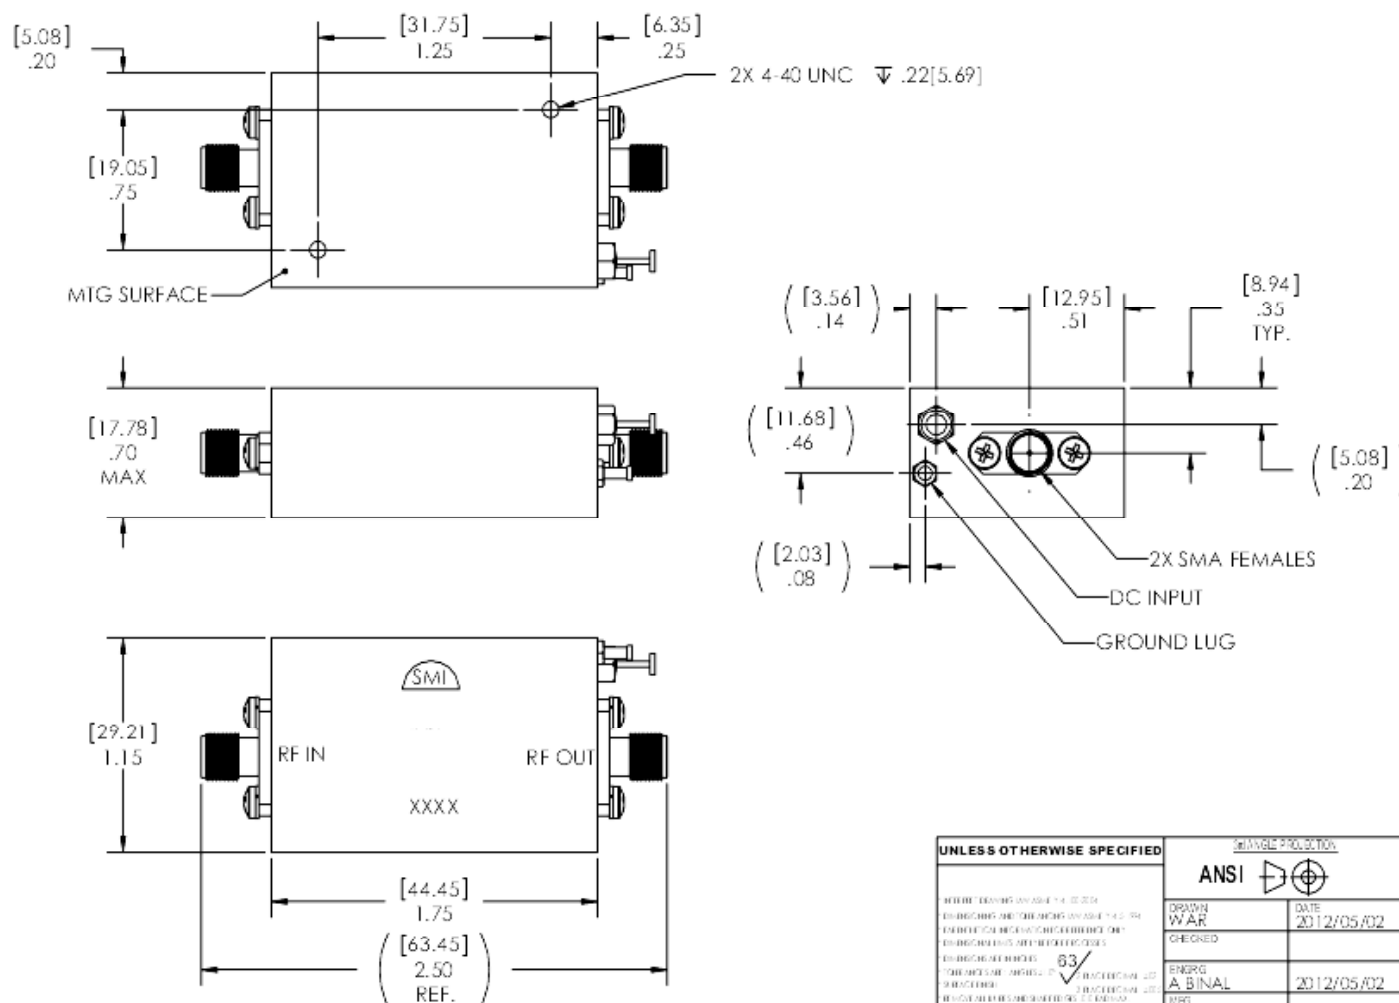

SEE SEPARATE PARTS LIST IN ELECTRONIC STORAGE

[illegible]COMPUTER ASSISTED DRAWING
GENERATED USING SOLIDWORKS 2002

0524 57 1994 8125 81