

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		A	REVISED PER EC OS14-0150-05	30AUG05	BM	JL

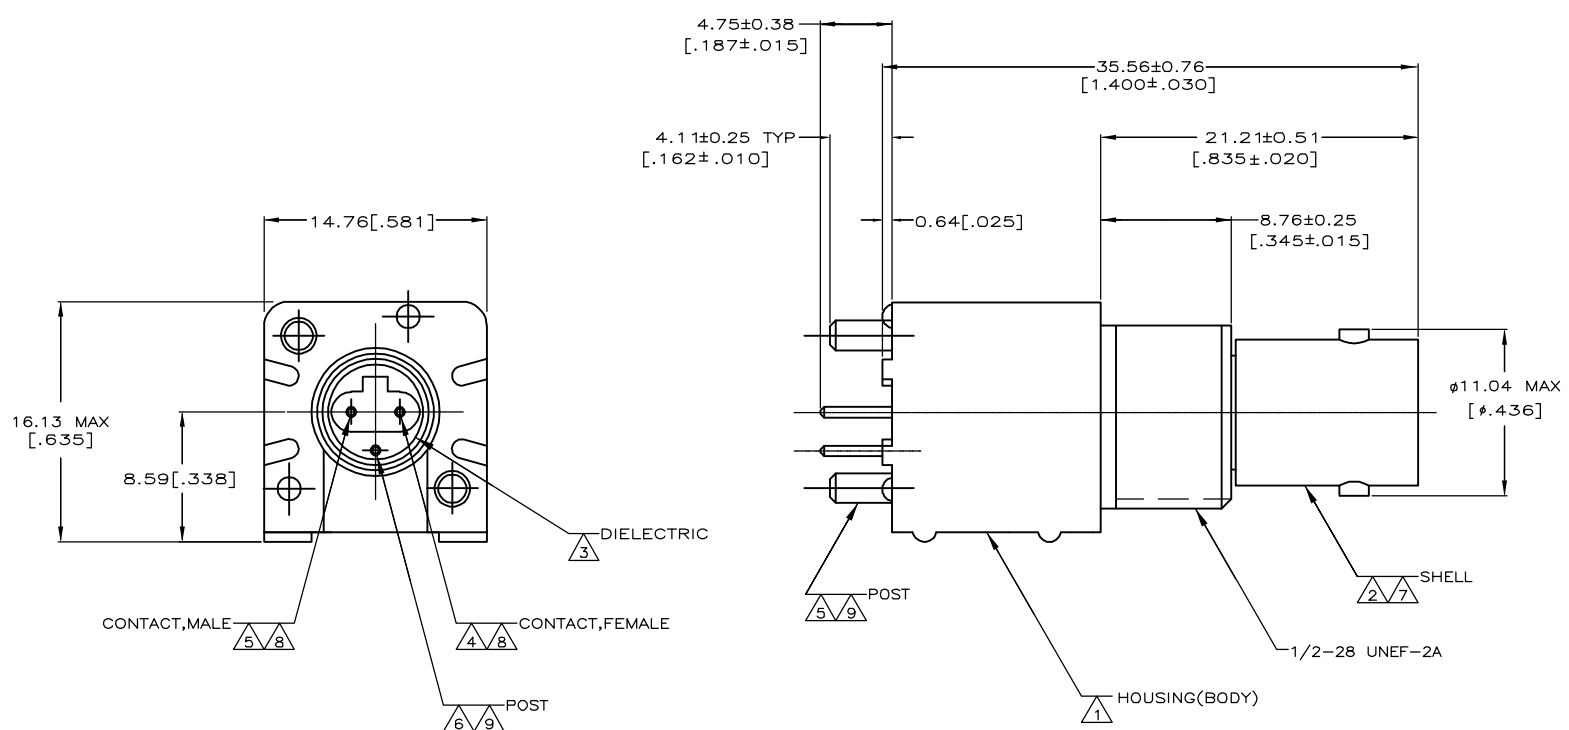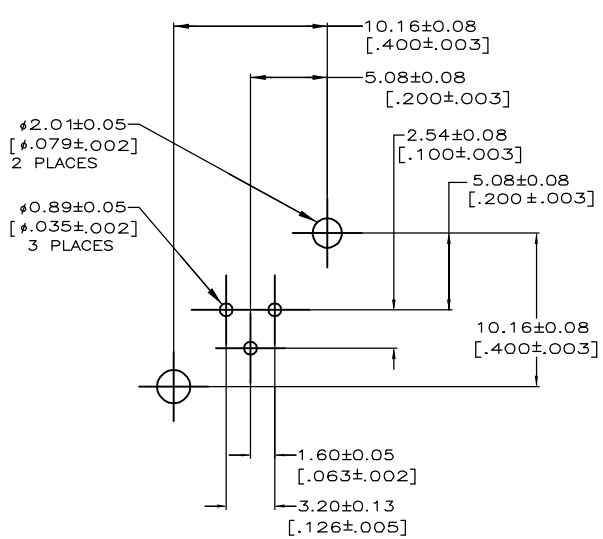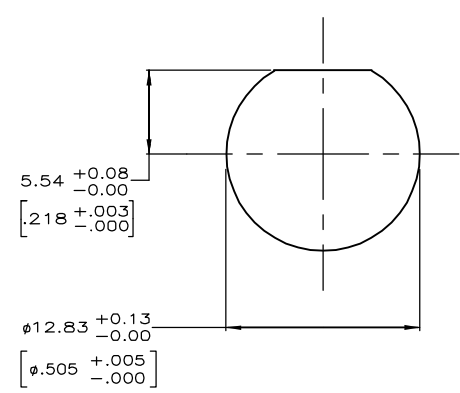

RECOMMENDED
PANEL CUTOUT

- 1 POLYESTER, PBT, 15% GLASS FIBER REINFORCED, NATURAL, PER MIL-M-24519.
- 2 ZINC PER QQ-Z-363.
- 3 POLYMETHYLPENTENE,GENERAL PURPOSE.
- 4 PHOSPHOR BRONZE PER QQ-B-750.
- 5 BRASS PER QQ-B-626.
- 6 BRASS PER ASTM-B-453.
- 7 NICKEL PL PER QQ-N-290, 3.81µm[.000150] MINIMUM THICK
- 8 GOLD PL PER MIL-G-45204, 0.76µm[.000030] MINIMUM THICK
- 9 TIN PLATE PER ASTM-B-545, 3.81µm[.000150] MINIMUM THICK

PCB CONFIGURATION

5221198-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA — DOCK5		21APR2005		tyco		Tyco Electronics Corporation	
		CHK J. HAVENER		21APR2005		Electronics		Harrisburg, Pa 17105-3608	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT		21APR2005		NAME	
		0 PLC ± —		PRODUCT SPEC		—		JACK,VERTICAL,PCB, SERIES TWIN BNC	
		1 PLC ± —		—					
		2 PLC ± 0.20[.008]		APPLICATION SPEC					
		3 PLC ± —		—		SIZE		CAGE CODE	DRAWING NO
		4 PLC ± —				A3		00779	C-5221198
		ANGLES ± —		WEIGHT		—		RESTRICTED TO	
MATERIAL		FINISH						—	
CUSTOMER DRAWING						SCALE		2:1	SHEET
								1	OF 1
									REV A