
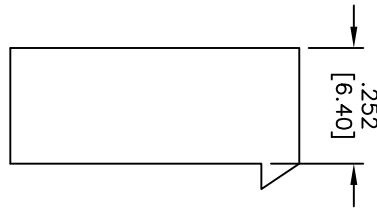
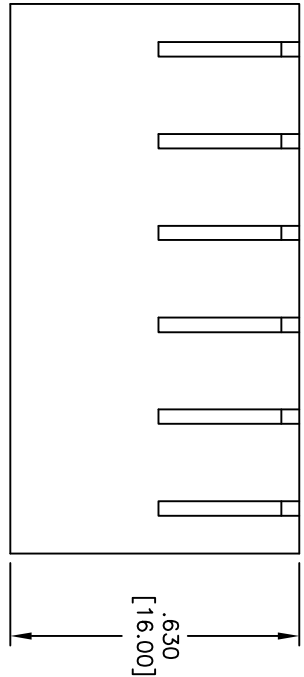


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/14/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

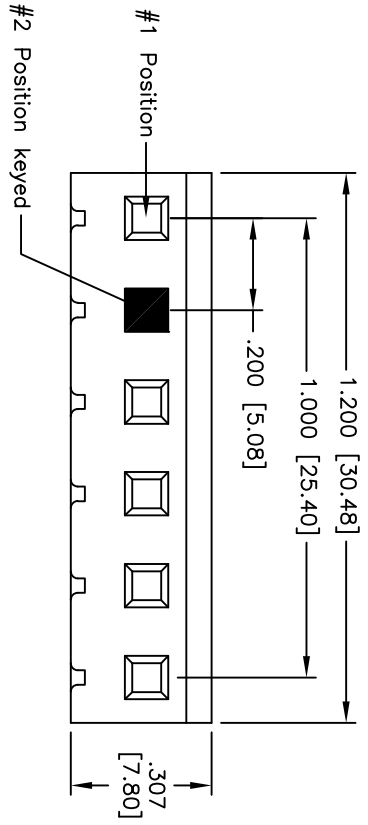

**SPECIFICATIONS:**

Material: Insulator: Nylon 66, glass reinforced, UL94V-2  
 Insulator color: Natural  
 Electrical: Voltage rating: 250V AC/DC  
 Current rating: 5A AC/DC  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 1,500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -25°C to +85°C  
 Environmental: Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	12/14/10
CHECKED	
APPROVED	

**ADAM TECH**  
 909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	.200 [5.08] PITCH CRIMP CONTACT HOUSING		
SIZE	PART NO.	SCALE	REV.
X	MTF-B-06-K02	NTS	-
REF:	S00015T	SHEET	1 OF 1