

C0816X7R1C473M050AC

TDK Item Description : C0816X7R1C473MT****




Application & Main Feature

Commercial Grade (Low ESL Reverse Geometry)

Series

C0816 [EIA CC0306]

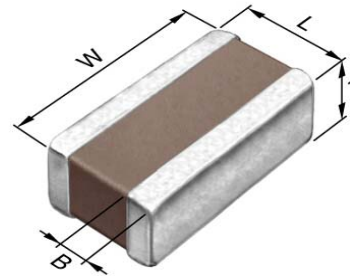

Dimensions

L 0.80mm +/-0.1mm
W 1.60mm +/-0.1mm
T 0.50mm +/-0.1mm
B 0.10mm Min.

Temperature Characteristic

X7R (-55 to 125 degC +/-15%)

Rated Voltage

1C (16Vdc)

Capacitance

47nF

Capacitance Tolerance

M (+/-20%)

Dissipation Factor

5% Max.


Insulation Resistance

2.13Gohm Min.


AEC-Q200

Not Applicable


DC Bias Characteristic

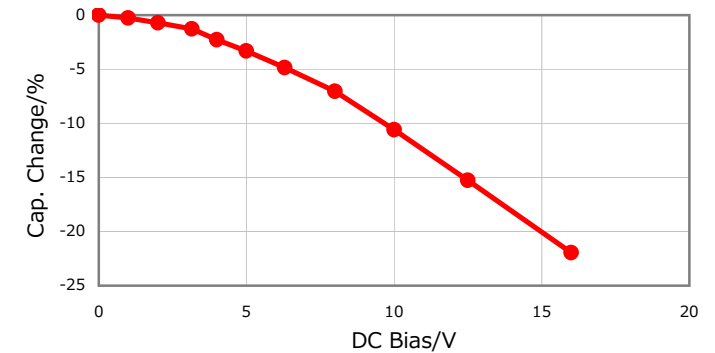


|Z|, ESR vs. Freq. Characteristics

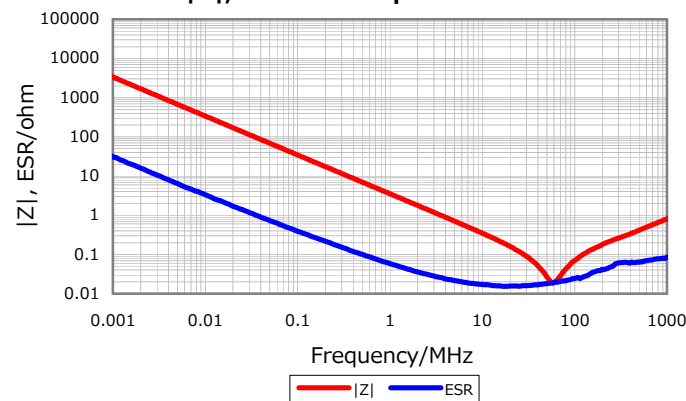


Temperature Characteristics

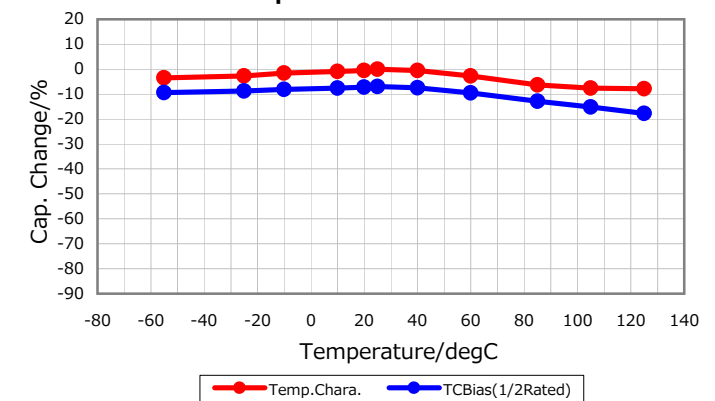

Cap. vs. Freq. Characteristic

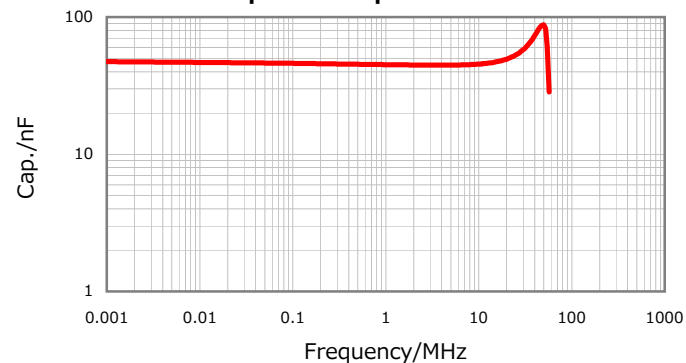

Ripple Temperature Rise Characteristics

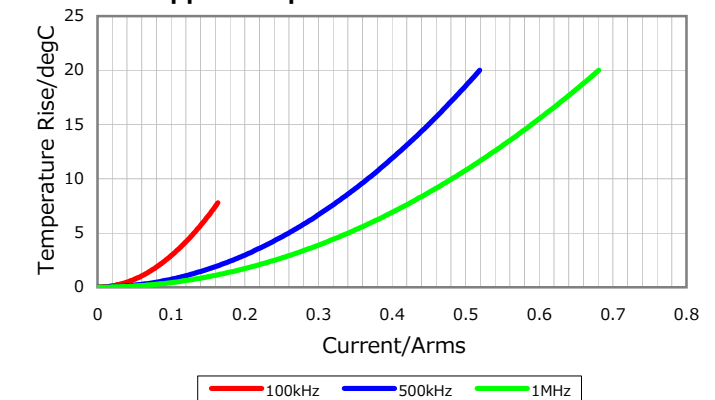

All specifications are subject to change without notice.

January 3, 2016