


# GSD

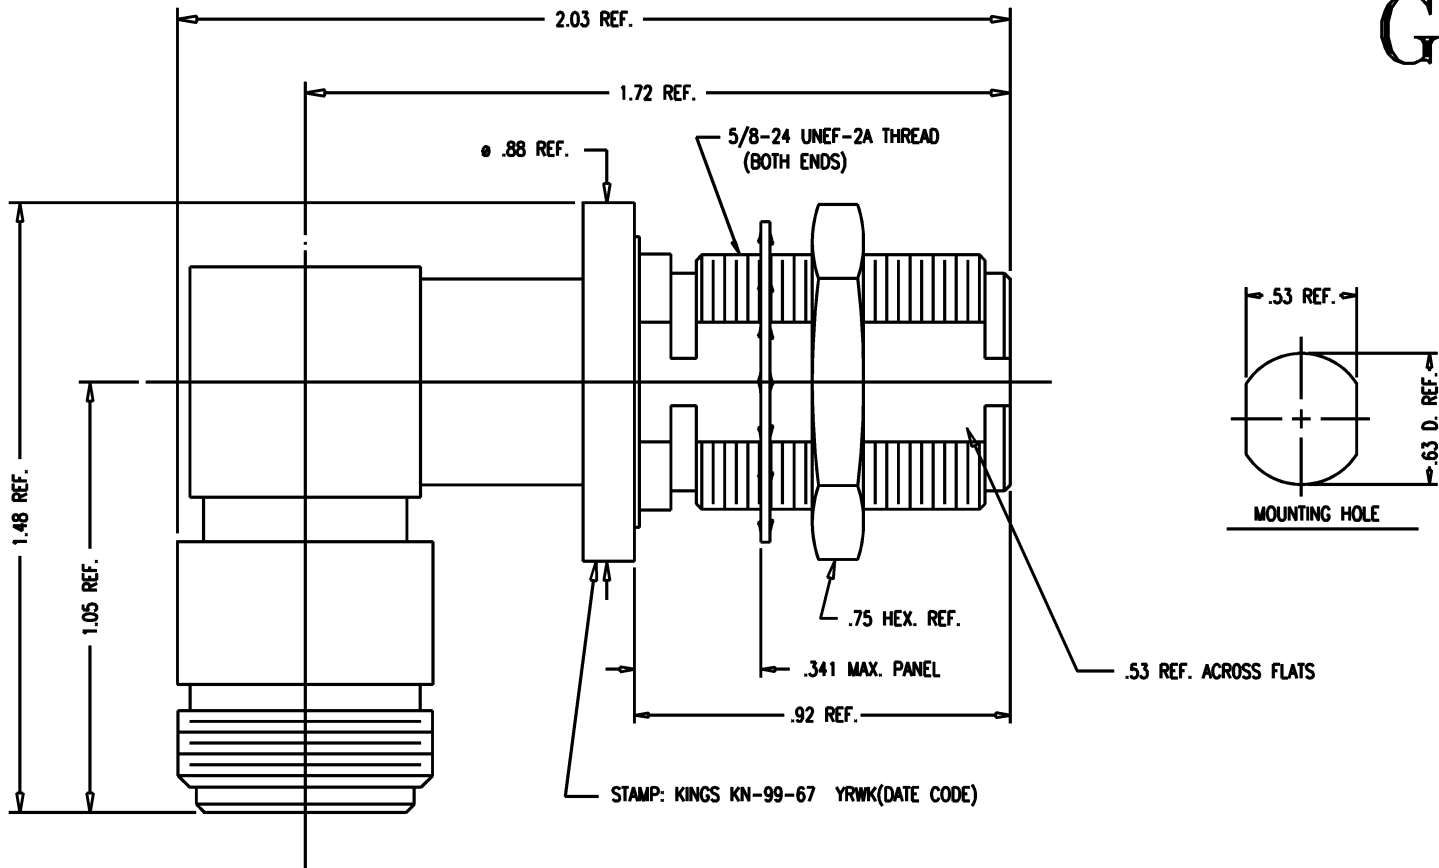

KN-99-67

REVISIONS

ISSUE	CHANGES
3	CN 30098 E JCA 08/31/88
4	CN 35352 C KVH 03/22/94
5	CN 40028 C DRK 08/08/07

NOTES:

- \* 1. INTERFACES PER MIL-STD-348, FIG. 304-2.
- 2. MATERIALS:  
 INSULATORS: TEFLON, ASTM-D-4894  
 GASKET: SILICONE RUBBER, ZZ-R-765  
 LOCKWASHER, PHOSPHOR BRONZE, QQ-B-750  
 CENTER CONTACTS: BER. COP., ASTM-B-196  
 ALL OTHER METAL PARTS: BRASS, ASTM-B16
- 3. FINISHES:  
 CENTER CONTACT: GOLD PLATE PER MIL-G-45204  
 ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
- 4. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 WORKING VOLTAGE: 1000 VOLTS RMS  
 FREQUENCY RANGE: DC TO 11 GHz

SCALE 3:1	
APPROX SURFACE AREA	
USED ON	
REF:	
ADAPTER, F-F, BULKHEAD, ANGLE, N	
DRAWN KH	DATE 01/24/94
DESIGN MJB	DATE 01/25/94
APPR.	DATE

A Winchester Electronics Company

# GSD

KN-99-67