

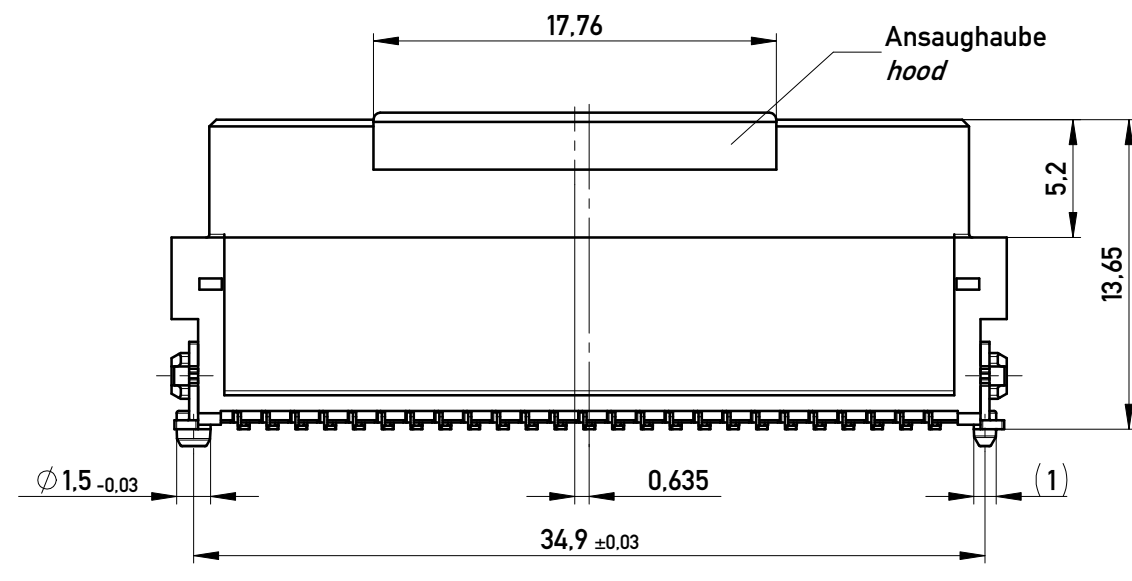
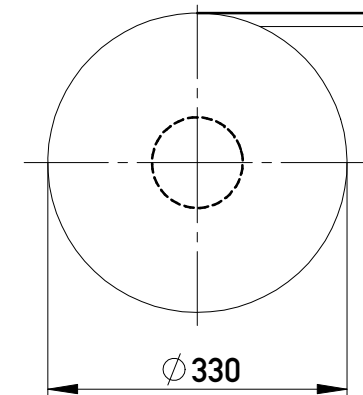
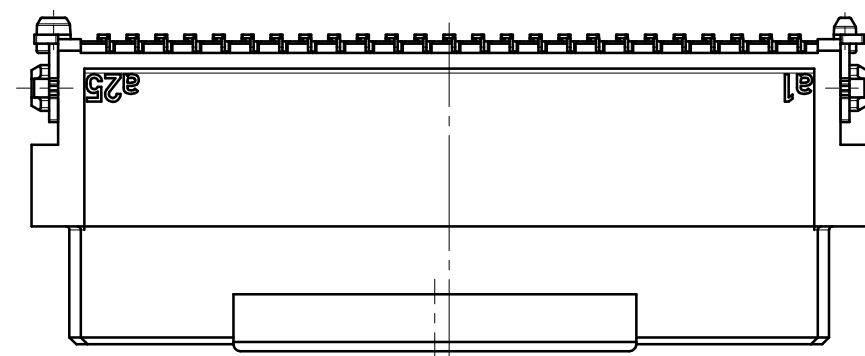



Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
 Verpackungseinheit: 170 Stück
Packaging unit: 170 pcs

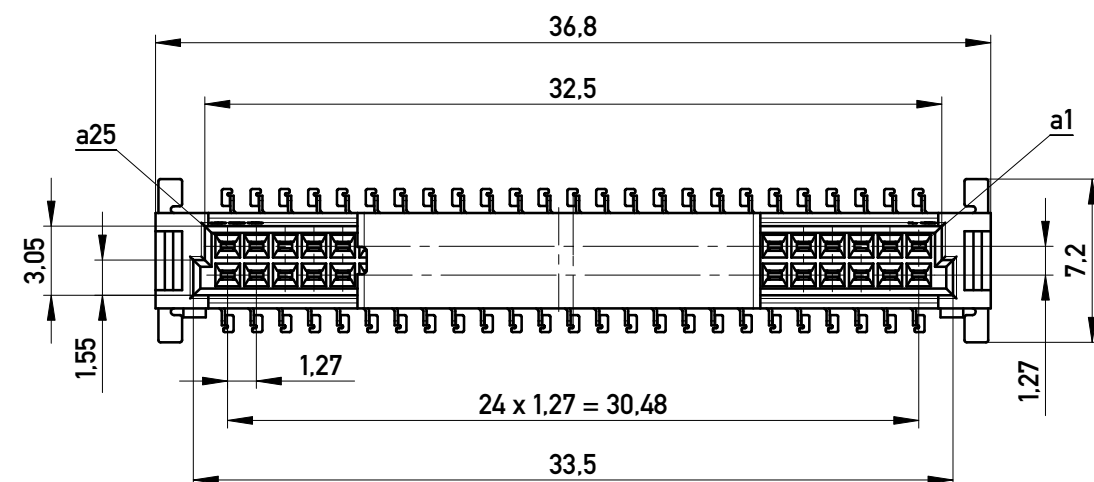

Abspulrichtung - Reel off Direction

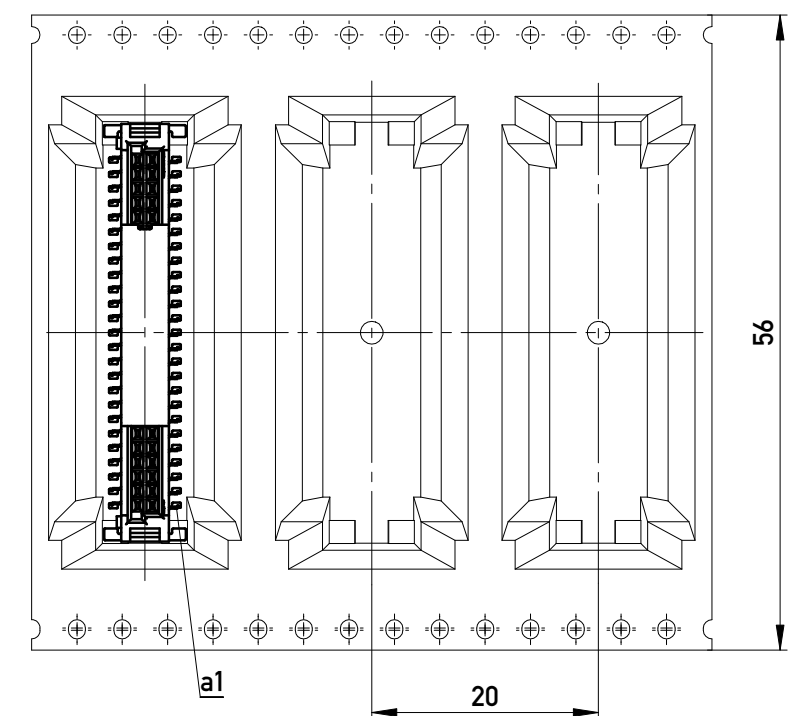

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

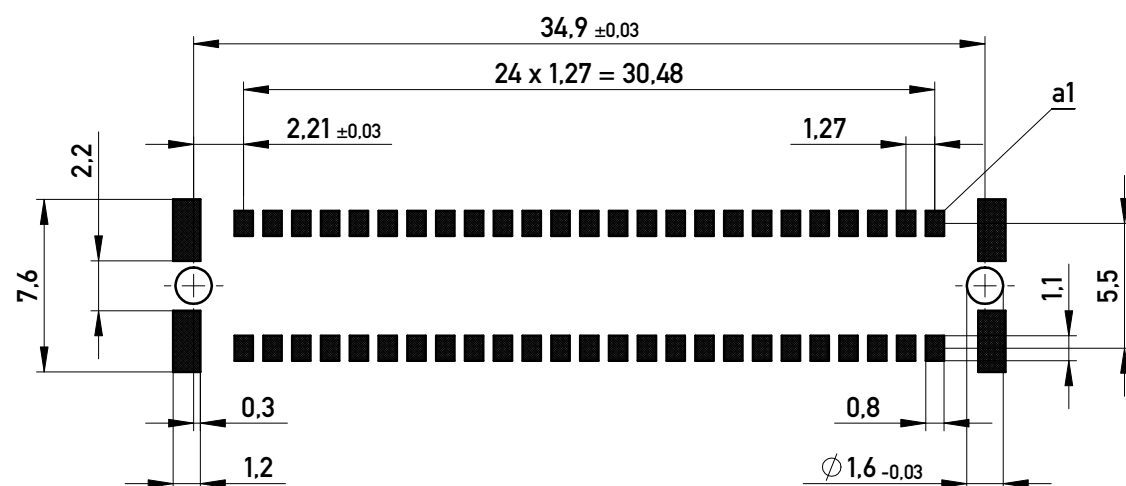

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinkt 4-6µm
Terminal Area 4-6µm tin plating

Koplanarität der Anschlüsse ≤0.1mm
Coplanarity Area of Termination ≤0.1mm

BA 7-23 - hohe Bauhöhe
type 7-23 - high profile

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.

Proprietary notice pursuant to ISO 15016 to be observed.

Information:				Tolerances		 All Dimensions in mm		Scale 3:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.		Designation					
						Federl. SMC-B 50-SMD-BA7-23 <i>Female SMC-B 50-SMT-type7-23</i>					
						www.ERNI.com		102303210089			
d		23.05.2016								A3	
Index		Date				Class		SMCB			