
HAMMOND MANUFACTURING®

www.hammondmfg.com

185D20

Low Voltage Chassis Mounted Power Transformer

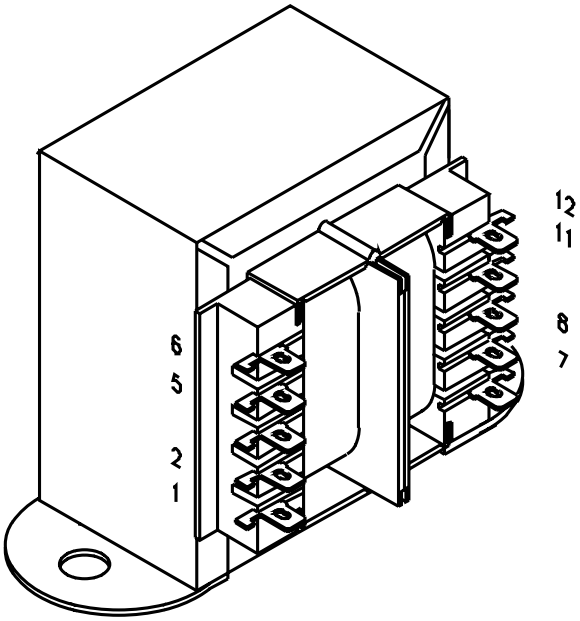


Key Features:

- **Universal operation on 50/60Hz, 115/ 230V dual primary for worldwide use.**
- **Dual bobbin construction**
- **Dual use terminals (solder lug or quick connect)**
- **Dual secondaries for series or parallel connections**
- **4,000V RMS Hipot tested**
- **Class F Insulation - 155 degrees C.**
- **Agency listings: cURus, CE, and TUV.**

Overall Dimensions - in. (mm)	
Width	3.12 (79.2)
Depth	2.22 (56.4)
Height	2.68 (68.1)
Weight	1.75 lbs./ 0.8 kg.
Hole to Hole Mounting Dims. - in. (mm)	
Width	2.81 (71.4)
Depth	- (-)
Terminal Lug Data- in. (mm)	
Width	0.19 (4.7)
Thickness	0.02 (0.5)
Electrical	
Size (VA)	43
Primary	115/ 230 VAC
Sec (Series)	20V C.T. @2.2A
Sec (Parallel)	10V@4.4A

Primary Connections - 185 Series Transformers

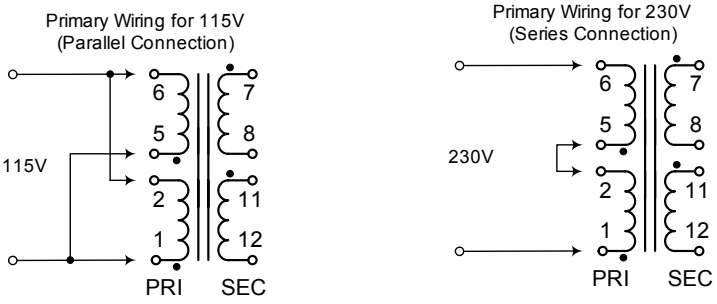

Secondary Connections - 185 Series Transformers

