

REVISION RECORD			
REV	ECN	DESCRIPTION	DRAFT DATE

NOTES1:

- UL Standard
- 1. Rated Voltage/Current : 300V / 10A
- 2. Withstanding Voltage : AC1600V/1Min.
- 3. Wire Range : 26~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	320V
Rate Current(A)	20A


- 2. Wire Range : 0.2~2.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.00/5.08mm,
- Poles : N=02~24P/02-16P
- 3. Stripping length : 9~10mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned Tolerances:

Pitch range in mm	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over	Over
6	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
10	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
24	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO	TO
30	±0.15	±0.20	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2							
60																	
100																	
150																	
100																	
150																	
150																	
150																	

6. RoHS Compliance

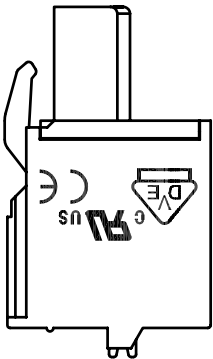

2EDGKDF - 5.0/5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

00A-(Standard)

(RoHS)

2EDGKDF - 5.0/5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) :1.(Grey)

2.(Blue)

3.(Black)

4.(Green)






5.(Orange)

6.(Red)

7.(Transparent)

8.(Yellow)

9.(White)

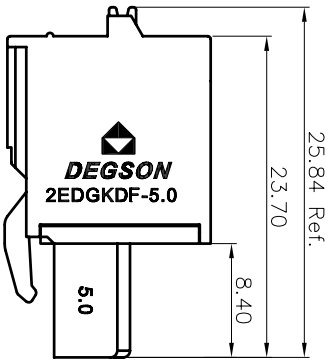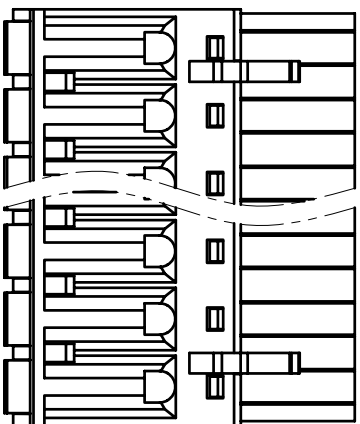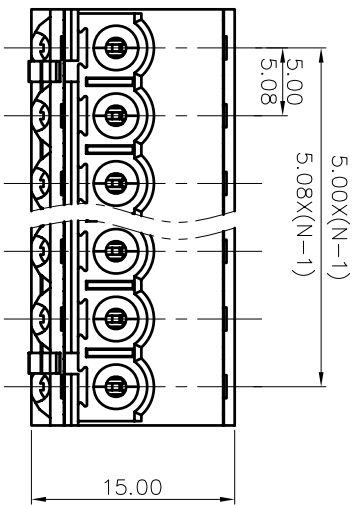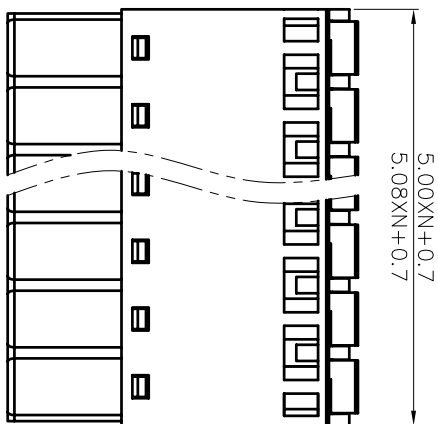

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD.:	/	CHKD.:	/
DRT.:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
			1:1