

HSF

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

NOTES:



- Current Rating: 3.0AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 1000V AC/DC
- Insulation Resistance: 1000MΩ
- Operation Temperature: -55°C~+105 °C

- Contact Material: Phosphor Bronze
- Contact Plating: Au and Sn over Ni
- Fixing Material: Phosphor Bronze
- Fixing Plating: Sn over Ni
- Housing Material: PBT+30% G.F.(UL94V-0)
- Cover Material: PBT+30% G.F.(UL94V-0)

Ordering Information

3410-3 XX X FS SX X A X

- No. of Pins Per Row: 10pin, 16pin, 32pin
- Rows with Contacts: A=a+b+c, B=a+b, C=a+c, D=a
- Contact Plating: S0=Gold Flash/Tin, S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin, SN=Tin
- Packing: A=Tray
- DIP Length: 1: L=2.50, 2: L=3.00, 3: L=4.00, 4: L=4.57
- W=With Lock, N=Without Lock

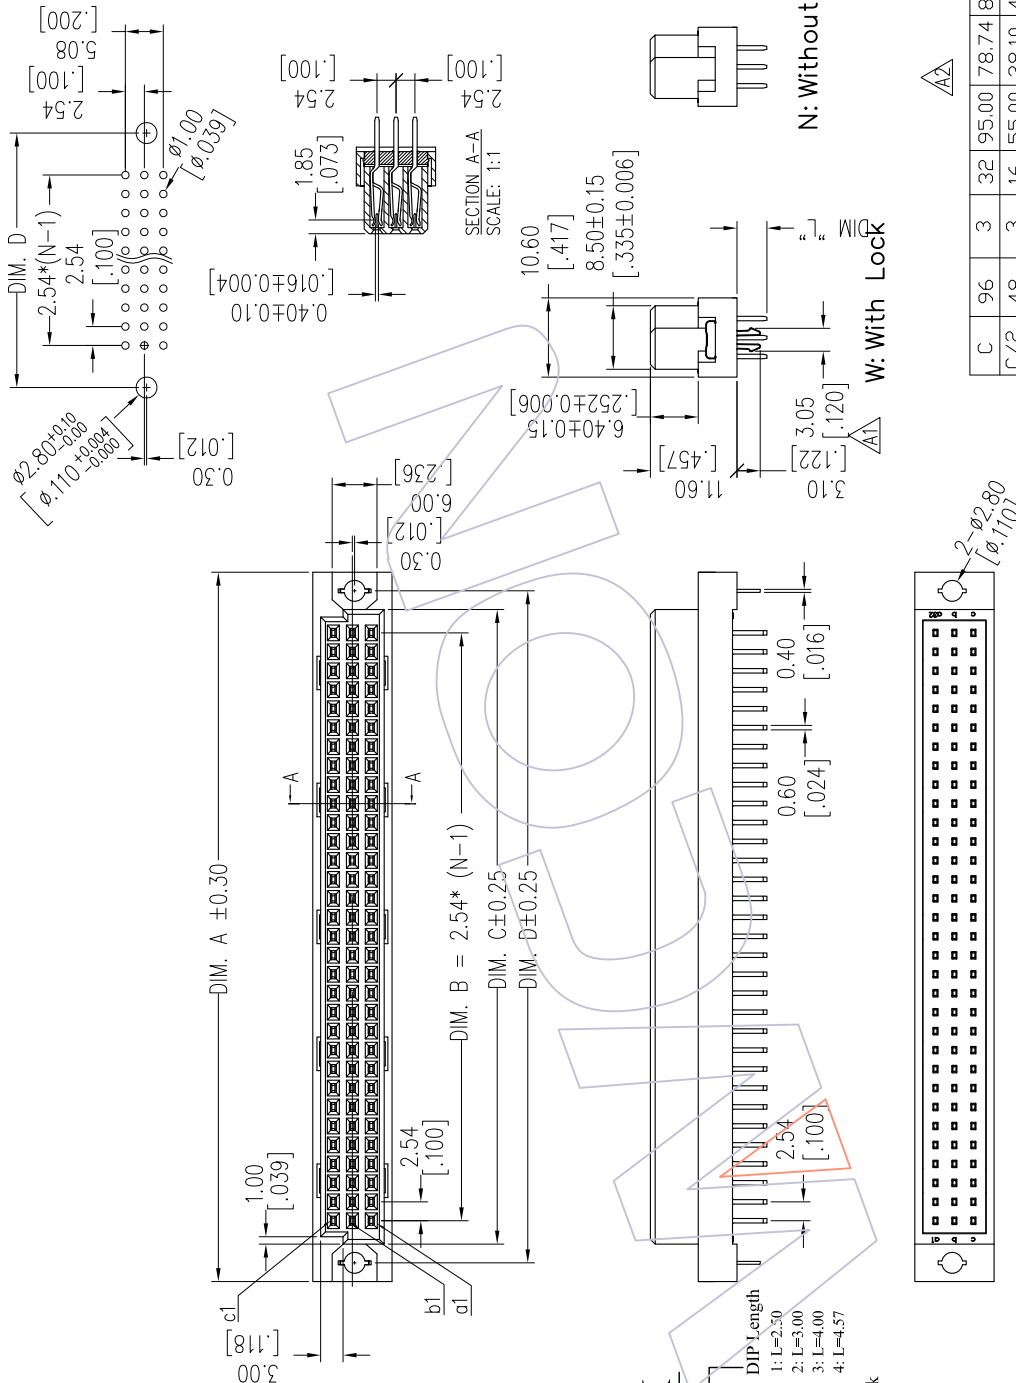

C	96	3	32	95.00	78.74	85.00	90.00
C/2	48	3	16	55.00	38.10	44.40	50.00
C/3	30	3	10	39.70	22.86	29.10	34.70
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D

PART NO. 3410-3XXXXSSXXAX		SCALE FIT		DATE		DRAW		OPERATION		CHANGE	
TITLE: 2.54PITCH DIN 41612 C, C/2, C/3 TYPE FEMALE		UNIT A4		2016/09/19		Ding Wen Min		X.X ±0.40		A2 2016/09/19	
Customer NO.		SHEET 1/1		DATE		CHECK		X.XX ±0.25		A1 2014/08/12	
Customer NO.		PROJ.		DATE		APPROVE		X.XXX ±0.15		A0 2014/05/29	
Customer NO.		PROJ.		DATE		APPROVE		Angle ± 3'		REV DATE	
Customer NO.		PROJ.		DATE		APPROVE		DIM TOL		MODIFICATION DESCRIPTION	

WCON
Http: www.wcon.com

WCON-Dongguan
WCON-Kunshan
Tel: +86 769 85358920
Tel: +86 512 57468408
Fax: +86 769 85358915
Fax: +86 512 57468468
E-mail: sales@wcon.com
E-mail: sales@wcon.com