Continental Device India Limited

An ISO/TS 16949, ISO 9001 and ISO 14001 Certified Company

EPITAXIAL SILICON POWER TRANSISTORS

CJD175 CJD177 CJD179 NPN | **CJD176 CJD178 CJD180 PNP**



PIN CONFIGURATION
1. BASE
2. COLLECTOR
3. EMITTER

DPAK (TO-252)
Plastic Package

Intended for use in Medium Power Linear Switching Applications

ABSOLUTE MAXIMUM RATINGS

DESCRIPTION	SYMBOL	CJD175 CJD176	CJD177 CJD178	CJD179 CJD180	UNIT
Collector -Emitter Voltage	V_{CEO}	45	60	80	V
Collector -Base Voltage	V_{CBO}	45	60	80	V
Emitter Base Voltage	V_{EBO}	5.0			V
Collector Current	I_C	3.0			A
Collector Peak Current	I_{CM}	7.0			A
Power Dissipation @ T_a=25ºC Derate above 25ºC	P_D	1.25 10			W mW/ºC
Power Dissipation @ T_c=25ºC	P_D	30			W
Operating and Storage Junction Temperature Range	T_j, T_{stg}	- 65 to +150			ºC

THERMAL CHARACTERISTICS

Junction to Ambient in free air	$R_{th\ (j\text{-}a)}$	100	ºC/W
Junction to Case	$R_{th\ (j\text{-}c)}$	4.16	ºC/W

ELECTRICAL CHARACTERISTICS (T_c=25ºC unless specified otherwise)


DESCRIPTION	SYMBOL	TEST CONDITION		MIN	MAX	UNIT
Collector Cut off Current	I_{CBO}	V_{CB}=45V, I_E=0 V_{CB}=60V, I_E=0 V_{CB}=80V, I_E=0	**CJD175/76** **CJD177/78** **CJD179/80**		100 100 100	µA µA µA
Emitter Cut off Current	I_{EBO}	V_{EB}=5V, I_C=0			1.0	mA
Collector Emitter Sustaining Voltage	*$V_{CEO\ (sus)}$	I_C=100mA, I_B=0	**CJD175/76** **CJD177/78** **CJD179/80**	45 60 80		V V V
Collector Emitter Saturation Voltage	*$V_{CE\ (sat)}$	I_C=1A, I_B=0.1A			0.8	V
Base Emitter on Voltage	*$V_{BE\ (on)}$	I_C=1A, V_{CE}=2V			1.3	V
DC Current Gain	*h_{FE} *h_{FE} Group	I_C=150mA, V_{CE}=2V I_C=1A, V_{CE}=2V I_C=150mA, V_{CE}=2V **Only CJD175/76/79**	 **- 6** **- 10** **- 16**	40 15 40 63 100	 100 160 250	
Transition Frequency	f_T	I_C=250mA, V_{CE}=10V		3.0		MHz

***Pulse test:- Pulse width=300µs, Duty cycle=1.5%**

CJD175_180Rev110106E


DPAK (TO-252)
Plastic Package

DPAK PACKAGE OUTLINE DIMENSIONS

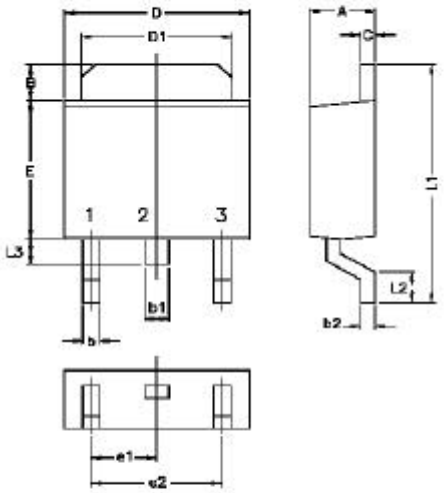


DIM	MIN.	MAX.
A	2.20	2.40
B	1.30	1.50
b	0.55	0.65
b1	0.75	0.85
b2	0.46	0.56
C	0.46	0.56
D	6.40	6.60
D1	5.20	5.40
E	5.40	5.60
e1	2.25	2.35
e2	4.50	4.70
L1	9.25	9.75
L2	0.5	–
L3	0.90	1.10

ALL DIMENSIONS ARE IN mm

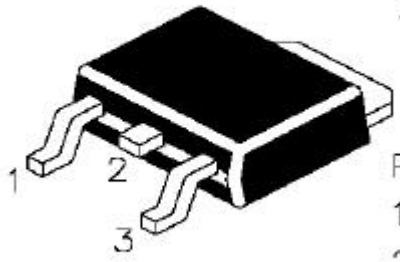

PIN CONFIGURATION
1. BASE
2. COLLECTOR
3. EMITTER

DPAK PACKING TUBE

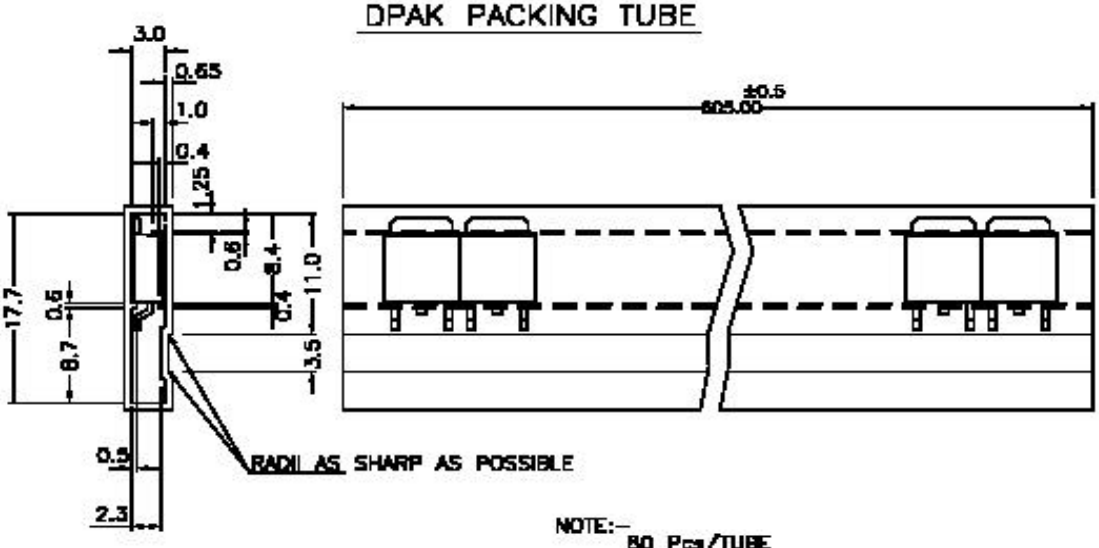

NOTE:–
80 Pcs/TUBE
2.5 K/REEL
ALL DIMENSIONS ARE IN mm

CJD175_180Rev110106E

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.

2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and Electronic Equipment (WEEE).

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.

CDIL is a registered Trademark of
Continental Device India Limited
C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www cdilsemi.com