



40 dB Fixed Attenuator, N Female To N Female  
Directional Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7323-40

**40 dB Fixed Attenuator, N Female To N Female Directional Rated To 50 Watts Up To 18 GHz**

**Configuration**

|                           |                                   |
|---------------------------|-----------------------------------|
| Design                    | Fixed, Directional Attenuator     |
| Connector 1               | N Female                          |
| Connector 2               | N Female                          |
| Body Material and Plating | Aluminum Heatsink, Black Anodized |

**Electrical Specifications**

|                            |          |
|----------------------------|----------|
| Frequency Range, GHz       | DC to 18 |
| Impedance, Ohms            | 50       |
| Attenuation Value, dB      | 40       |
| Maximum Input Power, Watts | 50       |
| Maximum VSWR               | 1.6:1    |

**Frequency 1**

|                          |         |
|--------------------------|---------|
| Range, GHz               | DC to 6 |
| VSWR                     | 1.3:1   |
| Attenuation Accuracy, dB | 1       |

**Frequency 2**

|                          |           |
|--------------------------|-----------|
| Range, GHz               | 6 to 12.4 |
| VSWR                     | 1.45:1    |
| Attenuation Accuracy, dB | 1.25      |

**Frequency 3**

|                          |            |
|--------------------------|------------|
| Range, GHz               | 12.4 to 18 |
| VSWR                     | 1.6:1      |
| Attenuation Accuracy, dB | 1.5        |

**Mechanical Specifications**

**Temperature**

|                        |             |
|------------------------|-------------|
| Operating Range, deg C | -55 to +125 |
|------------------------|-------------|

**Size**

|                 |                |
|-----------------|----------------|
| Length, in [mm] | 4.01 [101.85]  |
| Width, in [mm]  | 3 [76.2]       |
| Height, in [mm] | 3 [76.2]       |
| Weight, lbs [g] | 1.796 [814.65] |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Fixed Attenuator, N Female To N Female Directional Rated To 50 Watts Up To 18 GHz PE7323-40](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





40 dB Fixed Attenuator, N Female To N Female  
Directional Rated To 50 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7323-40

**Connector 1**

|                              |                             |
|------------------------------|-----------------------------|
| Type                         | N Female                    |
| Contact Material and Plating | Brass, Gold                 |
| Hex Size, In.                | 11/16                       |
| Body Material and Plating    | Stainless Steel, Passivated |

**Connector 2**

|                                      |                             |
|--------------------------------------|-----------------------------|
| Type                                 | N Female                    |
| Contact Material and Plating         | Brass, Gold                 |
| Outer Conductor Material and Plating | Brass, Silver               |
| Hex Size, In.                        | 11/16                       |
| Body Material and Plating            | Stainless Steel, Passivated |

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

|                |     |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|

**Plotted and Other Data**

|        |   |
|--------|---|
| Notes: | Values at 25 °C, sea level<br>OUTPUT PORT HANDLES 5 WATTS MAX POWER   |
| URL:   | <a href="http://www.pasternack.com/40db-fixed-n-female-n-female-50-watts-attenuator-pe7323-40-p.aspx">http://www.pasternack.com/40db-fixed-n-female-n-female-50-watts-attenuator-pe7323-40-p.aspx</a> |

40 dB Fixed Attenuator, N Female To N Female Directional Rated To 50 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



# PE7323-40 CAD Drawing

40 dB Fixed Attenuator, N Female To N Female Directional  
Rated To 50 Watts Up To 18 GHz

| Table of Information |                |
|----------------------|----------------|
| Connector Type       | DIM "A" (REF.) |
| SMA Male             | 0.68           |
| SMA Female           | 0.54           |
| TNC Male             | 0.98           |
| TNC Female           | 0.94           |
| N Female             | 0.95           |
| N Male               | 0.98           |
| 7/16 Male            | 1.12           |
| 7/16 Female          | 1.16           |

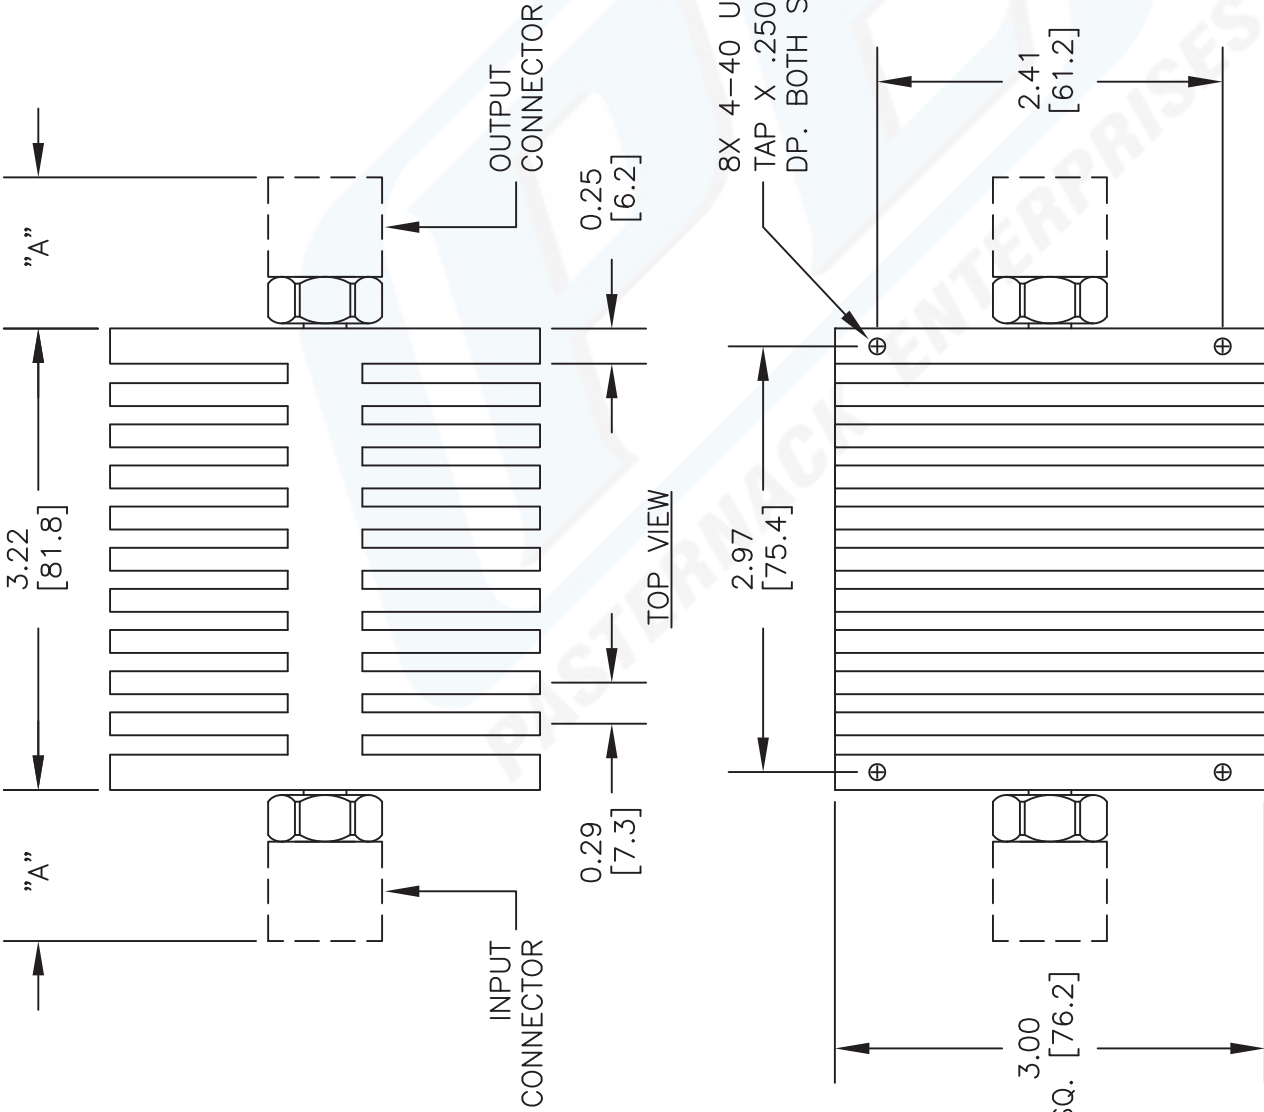

| xx | Part Number Configuration |                  |
|----|---------------------------|------------------|
|    | Input Connector           | Output Connector |
| 10 | 7/16 Female               | 7/16 Male        |
| 11 | N Female                  | 7/16 Male        |
| 12 | 7/16 Male                 | 7/16 Female      |
| 13 | 7/16 Female               | 7/16 Female      |
| 14 | N Male                    | 7/16 Female      |
| 15 | N Female                  | 7/16 Female      |
| 16 | 7/16 Female               | N Male           |
| 17 | N Female                  | N Male           |
| 18 | SMA Female                | N Male           |
| 19 | TNC Female                | N Male           |
| 20 | 7/16 Male                 | N Female         |
| 21 | 7/16 Female               | N Female         |
| 22 | N Male                    | N Female         |
| 23 | N Female                  | N Female         |
| 24 | SMA Male                  | N Female         |
| 25 | SMA Female                | N Female         |
| 26 | TNC Male                  | N Female         |
| 27 | TNC Female                | N Female         |
| 28 | 7/16 Female               | SMA Male         |
| 29 | N Female                  | SMA Male         |
| 30 | SMA Female                | SMA Male         |
| 31 | TNC Female                | SMA Male         |
| 32 | 7/16 Male                 | SMA Female       |
| 33 | 7/16 Female               | SMA Female       |
| 34 | N Male                    | SMA Female       |
| 35 | N Female                  | SMA Female       |
| 36 | SMA Male                  | SMA Female       |
| 37 | SMA Female                | SMA Female       |
| 38 | TNC Male                  | SMA Female       |
| 39 | TNC Female                | SMA Female       |
| 40 | 7/16 Female               | TNC Male         |
| 41 | N Female                  | TNC Male         |
| 42 | SMA Female                | TNC Male         |
| 43 | TNC Female                | TNC Male         |
| 44 | 7/16 Male                 | TNC Female       |
| 45 | 7/16 Female               | TNC Female       |
| 46 | N Male                    | TNC Female       |
| 47 | N Female                  | TNC Female       |
| 48 | SMA Male                  | TNC Female       |
| 49 | SMA Female                | TNC Female       |
| 50 | TNC Male                  | TNC Female       |
| 51 | TNC Female                | TNC Female       |

-yy Indicates Attenuation Level

DWG TITLE

**PE73xx-yy**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

2233

SCALE N/A

CAD FILE 102512

SIZE A

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

SIDE VIEW