



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	-	PN. OBSOLETE	ECO-12-004810	24-APR-12	BLJ, BHY

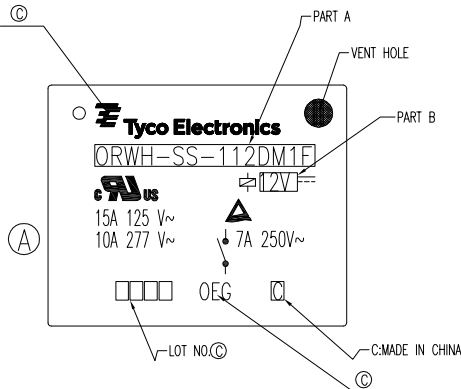


CIRCUIT DIAGRAM (BOTTOM VIEW)



DRILLING DIAGRAM (BOTTOM VIEW)

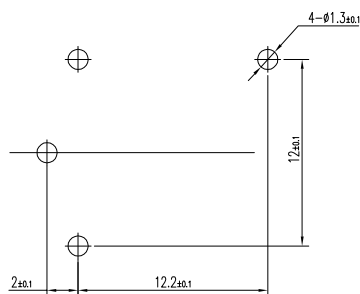

STATUS	TE PART NO	DESCRIPTION	PART B	PART A	ITEM
OBSOLETE	1721153-1	ORWH-SS-103DM1F, 000	3V	ORWH-SS-103DM1F	A
OBSOLETE	1721153-2	ORWH-SS-105DM1F, 000	5V	ORWH-SS-105DM1F	B
ACTIVE	1721153-3	ORWH-SS-106DM1F, 000	6V	ORWH-SS-106DM1F	C
OBSOLETE	1721153-4	ORWH-SS-109DM1F, 000	9V	ORWH-SS-109DM1F	D
ACTIVE	1721153-5	ORWH-SS-112DM1F, 000	12V	ORWH-SS-112DM1F	E
OBSOLETE	1721153-6	ORWH-SS-118DM1F, 000	18V	ORWH-SS-118DM1F	F
ACTIVE	1721153-7	ORWH-SS-124DM1F, 000	24V	ORWH-SS-124DM1F	G
OBSOLETE	1721153-8	ORWH-SS-148DM1F, 000	48V	ORWH-SS-148DM1F	H
OBSOLETE	1721153-9	ORWH-SH-103DM1F, 000	3V	ORWH-SH-103DM1F	I
OBSOLETE	1-1721153-0	ORWH-SH-105DM1F, 000	5V	ORWH-SH-105DM1F	J
OBSOLETE	1-1721153-1	ORWH-SH-106DM1F, 000	6V	ORWH-SH-106DM1F	K
ACTIVE	1-1721153-2	ORWH-SH-109DM1F, 000	9V	ORWH-SH-109DM1F	L
ACTIVE	1-1721153-3	ORWH-SH-112DM1F, 000	12V	ORWH-SH-112DM1F	M
OBSOLETE	1-1721153-4	ORWH-SH-118DM1F, 000	18V	ORWH-SH-118DM1F	N
ACTIVE	1-1721153-5	ORWH-SH-124DM1F, 000	24V	ORWH-SH-124DM1F	O
ACTIVE	1-1721153-6	ORWH-SH-148DM1F, 000	48V	ORWH-SH-148DM1F	P

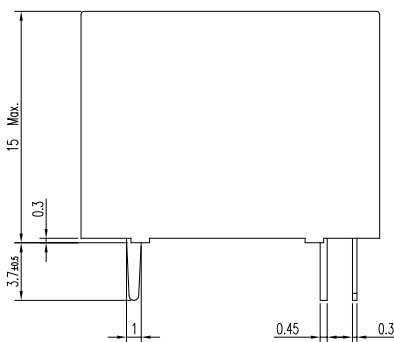

NOTE  
 1. LOT NO. SYSTEM AS FOLLOWING:  

 WEEK  
 YEAR

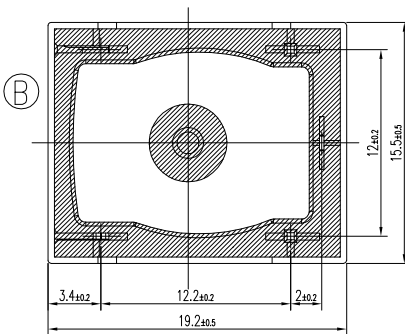


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
	ANGLES ±
MATERIAL	FINISH
-	-

DWN	XN.ZHANG
CHK	WAYNE.PENG
APVD	MJ.HO
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-
CUSTOMER DRAWING	

UV RESIN	UV SEAL(FOR SH)	13	
EPOXY RESIN	SEAL	12	
CLASS 155 F	MW79	MAGNETIC WIRE 11	
	HCP	COIL TERMINAL 10	
UL94 V-0	PBT	BOBBIN 9	
UL94 V-0	PBT	CASE 8	
	Ag ALLOY	STATIONARY CONTACT 7	
	Ag ALLOY	MOVABLE CONTACT 6	
	Cu ALLOY	MOVABLE SPRING 5	
	Cu ALLOY	NO TERMINAL 4	
	Cu PLATED STEEL	CORE 3	
	Cu PLATED STEEL	ARMATURE FORM A 2	
	Ni PLATED STEEL	YOKE 1	
INCOMBUSTIBILITY TREATMENT	MATERIAL	DESCRIPTION	ITEM

**STE** TE Connectivity

NAME: ORWH-1M CD FREE CUSTOMER DRAWING

SIZE: A3 CAGE CODE: 00779 DRAWING NO: 1721153 RESTRICTED TO: -

SCALE: 3:1 SHEET: 1 OF 1 REV: D