
Surface Mount General Purpose Silicon Rectifiers

Reverse Voltage - 50 to 1000 V

Forward Current - 1 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

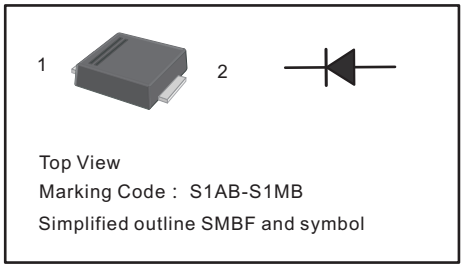

Top View
Marking Code : S1AB-S1MB
Simplified outline SMBF and symbol

FEATURES

- For surface mounted applications
- Low profile package
- Glass Passivated Chip Junction
- Easy to pick and place
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: SMBF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 57mg / 0.002oz

Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	S1ABF	S1BBF	S1DBF	S1GBF	S1JBF	S1KBF	S1MBF	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T_c = 125 °C	$I_{F(AV)}$	1							A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I_{FSM}	35							A
Maximum Instantaneous Forward Voltage at 1 A	V_F	1.1							V
Maximum DC Reverse Current T_a = 25 °C at Rated DC Blocking Voltage T_a =125 °C	I_R	5 50							μA
Typical Junction Capacitance (1)	C_j	15							pF
Typical Thermal Resistance (2)	$R_{\theta JA}$	75							°C/W
Operating and Storage Temperature Range	T_j, T_{stg}	-55 ~ +150							°C

(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C
(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved. 2016 Rev 1.0

Fig.1 Forward Current Derating Curve

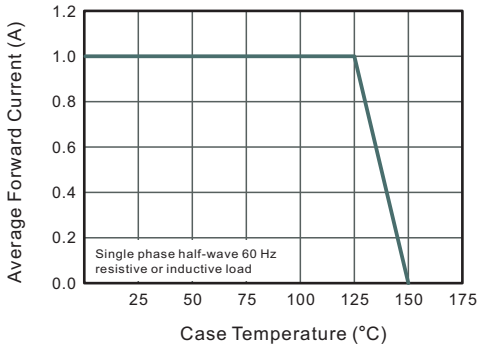


Fig.2 Typical Reverse Characteristics

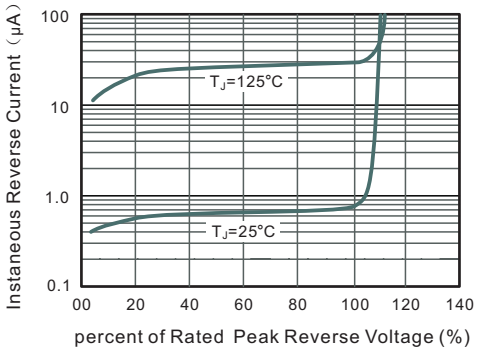


Fig.3 Typical Instaneous Forward Characteristics

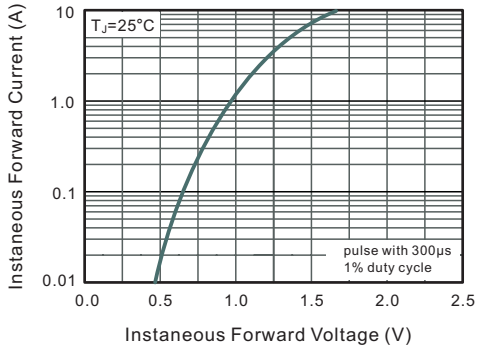


Fig.4 Typical Junction Capacitance


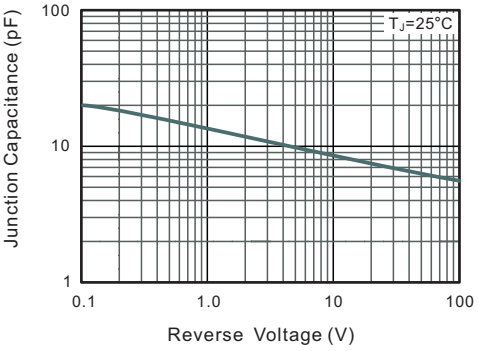



Fig.6 Maximum Non-Repetitive Peak Forward Surage Current

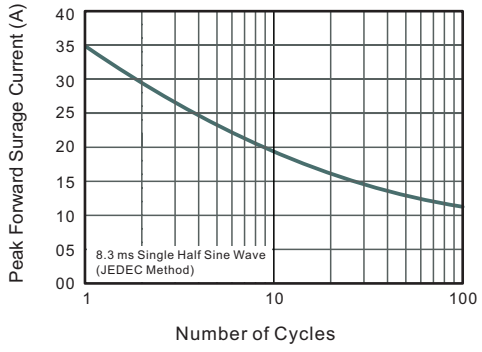



Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved. 2016 Rev 1.0

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads SMBF

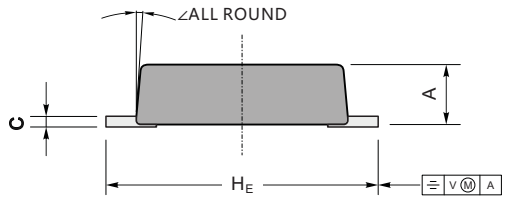



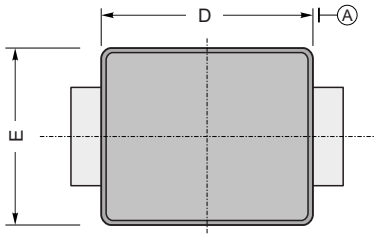


Top View

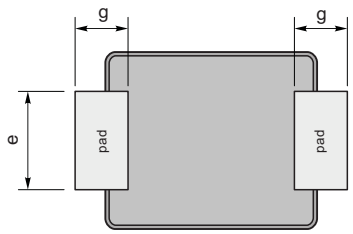

Bottom View

UNIT		A	C	D	E	H_E	e	g	∠
mm	max	1.3	0.26	4.4	3.7	5.5	2.2	1.0	9°
	min	1.1	0.18	4.2	3.5	5.1	1.9		
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		

The recommended mounting pad size

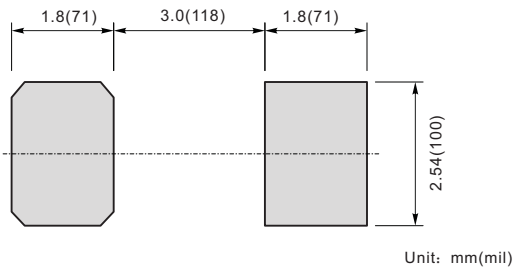

Marking

Type number	Marking code
S1ABF	S1AB
S1BBF	S1BB
S1DBF	S1DB
S1GBF	S1GB
S1JBF	S1JB
S1KBF	S1KB
S1MBF	S1MB

Copyright@ SEMIPOWER Electronic Technology Co., Ltd. All rights reserved.