

4802, Plug, solder terminal, screened, 3.5 mm, 2-pole, straight, UK-Connector



Description

- Solder terminal :
for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 2-pole , shielded , straight

References


Alternative: Housing insulated [4802.1210](#)
Last order date: 30.06.2016

Technical Data

| | | | |
|-----------------------|----------------------|---------------------------------|------------------|
| Diameter | 3.5 mm | Allowable Operation Temperature | -20 °C to 70 °C |
| Number of Poles | 2-pole | Terminal | solder terminal |
| Ratings DC | 1 A / 12 VDC | Housings | screened |
| Ratings AC | 1 A / 12 VAC | Style | straight |
| Dielectric Strength | 500 VDC | Lifetime | 10000 Insertions |
| Insulation Resistance | > 10000 MΩ @ 500 VDC | | |

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

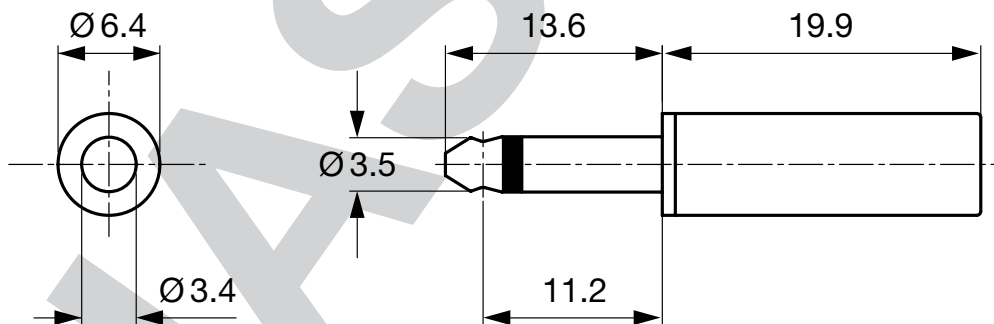

All Variants

| Product group | Diameter [mm] | Number of Poles | Terminal | Order Number |
|------------------------------|---------------|-----------------|-----------------|---------------------------|
| Data and Signal Plug/Sockets | 3.5 | 2-pole | solder terminal | 4802.1200 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs