

Dual Schottky Rectifiers

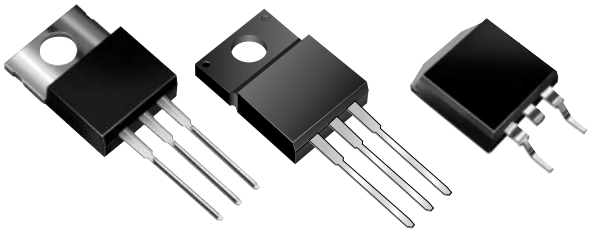


Reverse Voltage 30 to 45V
Forward Current 30A


TO-220AB (MBR3035CT, MBR3045CT)

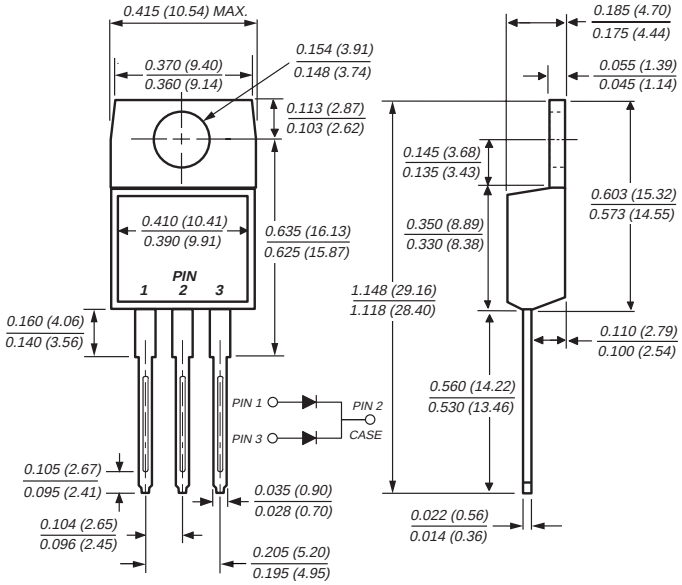

ITO-220AB (MBRF3035CT, MBRF3045CT)

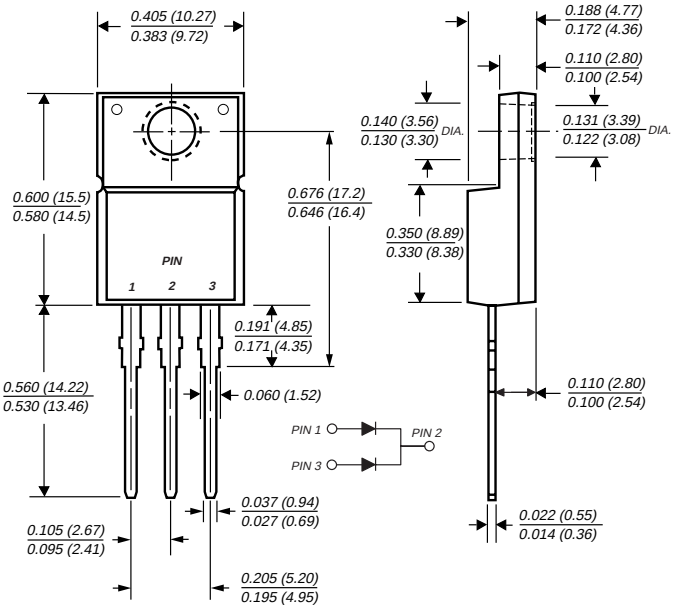


Mounting Pad Layout TO-263AB

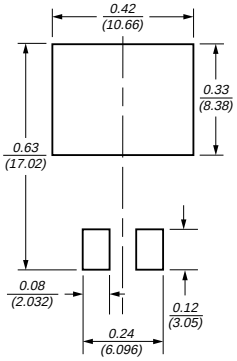

Dimensions in inches and (millimeters)

TO-263AB (MBRB3035CT, MBRB3045CT)

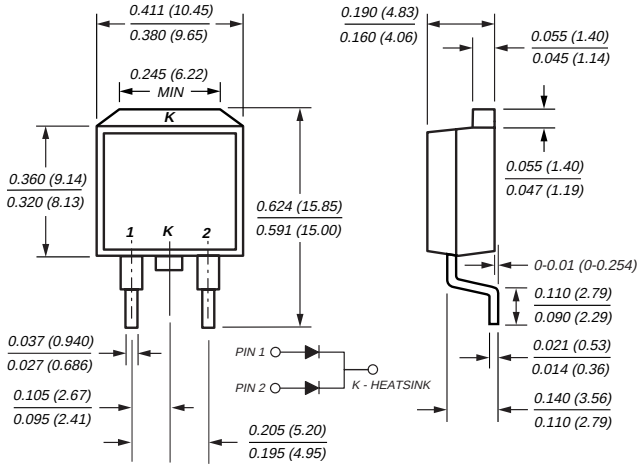

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive center tap
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Guardring for overvoltage protection
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

Mechanical Data

Case: JEDEC TO-220AB, ITO-220AB, TO-263AB molded plastic body

Terminals: Plated leads, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case (TO-220AB, ITO-220AB) at terminals (TO-236AB)

Polarity: As marked **Mounting Position:** Any

Mounting Torque: 10 in-lbs maximum

Weight: 0.08 oz., 2.24 g

Maximum Ratings (T_C = 25°C unless otherwise noted)

Parameter	Symbol	MBR3035CT	MBR3045CT	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	V
Working peak reverse voltage	V_{RWM}	35	45	V
Maximum DC blocking voltage	V_{DC}	35	45	V
Maximum average forward rectified current *Total device* / *Per leg*	$I_{F(AV)}$	30 15		A
Peakrepetitive forward current per leg at T_C = 105°C (rated V_R, square wave, 20KHz)	I_{FRM}	30		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I_{FSM}	200		A
Peak repetitive reverse current per leg at t_p = 2µs, 1KHz	I_{RRM}	2.0		A
Voltage rate of change (rated V_R)	dv/dt	10,000		V/µs
Operating junction temperature range	T_J	–65 to +150		°C
Storage temperature range	T_{STG}	–65 to +175		°C
RMS Isolation voltage (MBRF type only) from terminals to heatsink with t = 1 second, RH ≤ 30%	V_{ISOL}	4500 (1) 3500 (2) 1500 (3)		V

Electrical Characteristics (T_C = 25°C unless otherwise noted)

Parameter		Symbol	Value	Unit
Maximum instantaneous forward voltage per leg at(4):	I_F = 20A, T_C = 125°C I_F = 30A, T_C = 25°C I_F = 30A, T_C = 125°C	V_F	0.60 0.76 0.72	V
Maximum instantaneous reverse current per leg at rated DC blocking voltage(4)	T_J = 25°C T_J = 125°C	I_R	1.0 60	mA

Thermal Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	MBR	MBRF	MBRB	Unit
Typical thermal resistance per leg	$R_{\Theta JC}$	1.5	4.5	1.5	°C/W

Notes:
(1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
(2) Clip mounting (on case), where leads do overlap heatsink
(3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
(4) Pulse test: 300µs pulse width, 1% duty cycle

Ordering Information

Product	Case	Package Code	Package Option
MBR3035CT - MBR3045CT	TO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRF3035CT - MBRF3045CT	ITO-220AB	45	Anti-Static tube, 50/tube, 2K/carton
MBRB3035CT - MBRB3045CT	TO-263AB	31 45 81	13" reel, 800/reel, 4.8K/carton Anti-Static tube, 50/tube, 2K/carton Anti-Static 13" reel, 800/reel, 4.8K/carton

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

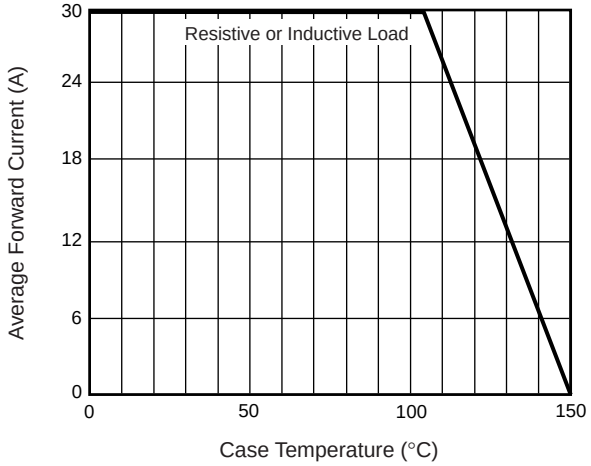


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current Per Leg

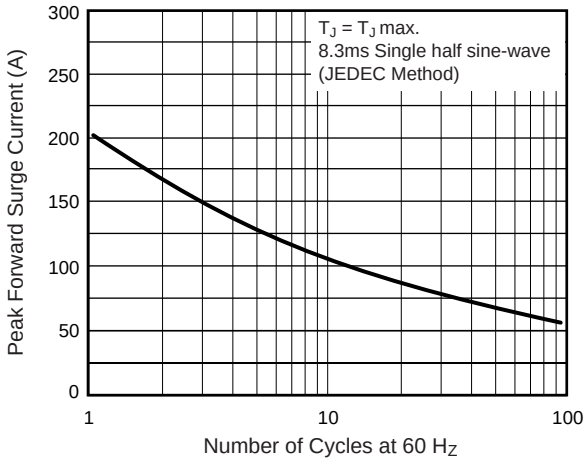


Fig. 3 – Typical Instantaneous Forward Characteristics Per Leg

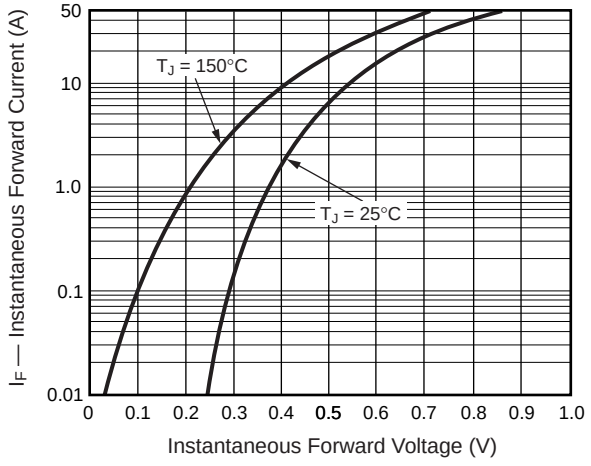


Fig. 4 – Typical Reverse Characteristics Per Leg

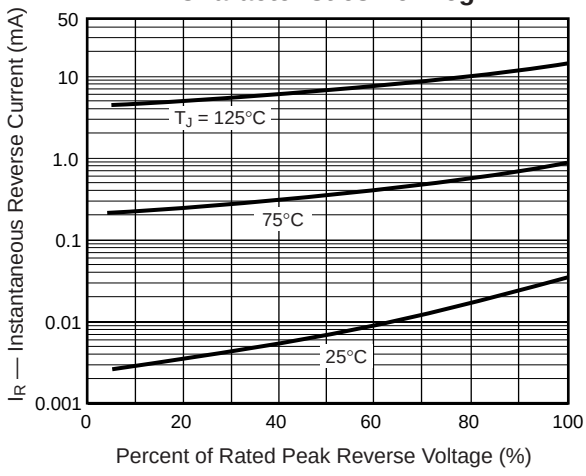


Fig. 5 – Typical Junction Capacitance Per Leg

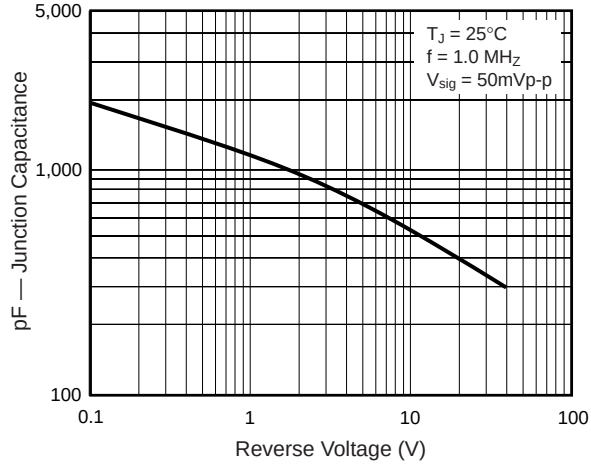


Fig. 6 – Typical Transient Thermal Impedance Per Leg

